










































Raccordi a pressione - SERIE STANDARD
INDICE

| DESCRIZIONE - DESCRIPTION - BESCHREIBUNG - DESCRIPTION | CODICE | PAG. |
|---|---|---------|
| BOCCOLA R1A Ferrule R1A Jupe R1A Presshülse R1A Casquillo R1A |  | 1 |
| BOCCOLA R2A Ferrule R2A Jupe R2A Presshülse R2A Casquillo R2A |  | 2 |
| BOCCOLA R1T Ferrule R1T Jupe R1T Presshülse R1T Casquillo R1T |  | 3 |
| BOCCOLA R2T Ferrule R2T Jupe R2T Presshülse R2T Casquillo R2T |  | 4 |
| BOCCOLA R12T Ferrule R12T Jupe R12T Presshülse R12T Casquillo R12T |  | 5 |
| BOCCOLA R12TN Ferrule R12TN Jupe R12TN Presshülse R12TN Casquillo R12TN |  | 6 |
| BOCCOLA B1SC Ferrule B1SC Jupe B1SC Presshülse B1SC Casquillo B1SC |  | 7 |
| BOCCOLA B3R Ferrule B3R Jupe B3R Presshülse B3R Casquillo B3R |  | 8 |
| BOCCOLA R9R Ferrule R9R Jupe R9R Presshülse R9R Casquillo R9R |  | 9 |
| BOCCOLA 4SH Ferrule 4SH Jupe 4SH Presshülse 4SH Casquillo 4SH |  | 10 |
| BOCCOLA R7 Ferrule R7 Jupe R7 Presshülse R7 Casquillo R7 |  | 11 |
| MASCHIO GAS SV 60° BSP male parallel 60° Mâle gaz 60° AGR 60° innenkonus (BSP gewinde) Macho gas cilindrico asiento 60° |  | 12 - 13 |
| FEMMINA GAS SV 60° BSP straight female 60° Femelle droite 60° AGR 60° konus (BSP gewinde) Tuerca giratoria recta BSP 60° |  | 14 - 15 |














Raccordi a pressione - SERIE STANDARD
INDICE

| DESCRIZIONE - DESCRIPTION - BESCHREIBUNG - DESCRIPTION | CODICE | PAG. |
|---|---|---------|
| CURVA 90° GAS SV 60° BSP female 90° swept elbow Femelle 90° cône 60° BSP DKR 90° bogen 60° konus (BSP gewinde) Tuerca giratoria 90° BSP |  | 16 - 17 |
| CURVA 45° GAS SV 60° BSP female 45° swept elbow Embout femelle 45° cône 60° BSP BSP 45° winkel - aufschraub konus 60° Tuerca giratoria 45° BSP |  | 18 - 19 |
| FEMMINA GAS DADO LIBERO BSP female free nut Femelle droite écrou libre DKR 60° konus (BSP gewinde) Hembra rosca gas asiento 60° |  | 20 |
| CURVA 90° GAS DADO LIBERO 90° BSP female free nut Femelle 90° cône 60° écrou libre DKR 90° bogen 60° konus (BSP gewinde) Hembra 90° rosca gas asiento 60° |  | 21 |
| CURVA 45° DADO LIBERO 45° BSP female free nut Embout femelle 45° cône 60° écrou libre DKR 45° bogen, konus 60° (BSP gewinde) Hembra 45° rosca gas asiento 60° |  | 22 |
| FEMMINA GAS DADO SPINATO CON O-RING BSP O-Ring female thrust wired nut Femelle droite écrou à jonc O-Ring DKOR 60° konus mit O-Ring (BSP gewinde) Hembra rosca gas asiento 60° O-Ring tuerca sujetada con perno |  | 23 |
| CURVA 90° GAS DADO SPINATO CON O-RING 90° BSP O-Ring thrust wired nut Femelle 90° cône 60° O-Ring écrou à cheville DKOR 90° bogen 60° konus mit O-Ring (BSP gewinde) Hembra 90° rosca gas asiento 60° O-Ring tuerca sujetada con perno |  | 24 |
| CURVA 45° DADO SPINATO CON O-RING 45° BSP O-Ring thrust wired nut Emout femelle 45° BSP 60° O-Ring écrou à cheville DKOR 45° bogen 60°, konus mit O-Ring (BSP gewinde) Hembra 45° rosca gas asiento 60° O-Ring tuerca sujetada con perno |  | 25 |
| CURVA 90° GAS SV 60° COMPATTA BSP compact female 90° swept elbow Femelle compacte 90° cone 60° BSP DKR 90° kompakt Tuerca giratoria 90° BSP compacta |  | 26 |
| MASCHIO GAS SEDE PIANA BSP parallel flat seat male Mâle gaz face plate Flachdichtend BSP gewinde Macho gas asiento plano |  | 27 |
| FEMMINA GAS SEDE PIANA BSP flat seat female Femelle BSP à face plate Flachdichtend BSP gewinde Hembra rosca gas asiento plano |  | 28 |
| MASCHIO CONICO SV 60° BSP taper male 60° Mâle conique 60° AGR konisch (BSP) Macho gas conico |  | 29 |
| MASCHIO NPTF SV 60° NPTF male 60° Mâle NPTF 60° AGN 60° innenkonus (NPTF) Macho NPTF asiento 60° |  | 30 |














Raccordi a pressione - SERIE STANDARD
INDICE

| DESCRIZIONE - DESCRIPTION - BESCHREIBUNG - DESCRIPTION | CODICE | PAG. |
|--|---|---------|
| MASCHIO JIC SV 74° JIC male 74° Mâle JIC 74° AGJ 74° aussenkonus (UNF - gewinde) Macho rosca UNF asiento JIC - 74° |  | 31 - 32 |
| FEMMINA JIC SV 74° JIC female 74° cone seat Embout femelle JIC 74° DKJ 74° dicht kopf (UNF gewinde) Hembra rosca UNF asiento JIC - 74° |  | 33 - 34 |
| CURVA 90° JIC SV 74° 90° JIC female swept elbow 74° cone seat Femelle 90° JIC 74° filet UNF DKJ 90° bogen 74° JIC dicht kopf (UNF) Hembra 90° rosca UNF asiento JIC - 74° |  | 35 - 36 |
| CURVA 45° JIC SV 74° 45° JIC female swept elbow 74° cone seat Embout femelle 45° JIC 74° filet UNF DKJ 45° bogen 74° JIC dicht kopf (UNF) Hembra 45° rosca UNF asiento JIC - 74° |  | 37 - 38 |
| FEMMINA JIC SV 74° DADO SPINATO JIC female 74° cone seat with thrust wire nut Femelle JIC SV 74° avec ecrou à jonc DKJ 74° dicht kopf (UNFgewinde) mit gestiteter mutter Hembra rosca UNF asiento JIC 74° con tuerca sujetada con pierno |  | 39 |
| CURVA 90° JIC SV 74° DADO SPINATO 90° JIC female swept elbow 74° cone seat with thrust wire nut Embout femelle 90° JIC 74° filet UNF avec ecrou à jonc DKJ 90° bogen 74° JIC dicht kopf (UNF) Hembra 90° rosca UNF asinto JIC 74° con tuerca sujetada con pierno |  | 40 |
| CURVA 45° JIC SV 74° DADO SPINATO 45° JIC female swept elbow 74° cone seat with thrust wire nut Embout femelle 45° JIC 74° filet UNF avec ecrou à jonc DKJ 45° bogen 74° JIC dicht kopf (UNF) Hembra 45° rosca UNF asiento JIC 74° con tuerca sujetada con pierno |  | 41 |
| FEMMINA JIC SV 74° DOPPIO ESAGONO JIC female 74° cone seat double hexagon Femelle JIC SV 74° double hexagone DKJ 74° - konus mit konter -sechskant Hembra rosca UNF asiento JIC 74° doble hexàgono |  | 42 |
| FEMMINA METRICA "KOMATSU" SV 60° "KOMATSU" metric female Femelle metrique "KOMATSU" DK "KOMATSU" 60° konus metrisch Hembra metrica "KOMATSU" 60° |  | 43 |
| FEMMINA DIRITTA "TOYOTA" "TOYOTA" BSP straight female 60° "TOYOTA" femelle droit 60° DK "TOYOTA" 60° konus Hembra recta "TOYOTA" 60° |  | 44 |
| MASCHIO METRICO SV 60° Metric male 60° Mâle métrique évasé 60° AGM 60° innen konus Macho métrico cono 60° |  | 45 - 46 |
| FEMMINA METRICA SV 60° Metric female SV 60° Femelle droite 60° DKM 60° konus Hembra rosca metrica asiento 60° |  | 47 - 48 |
| CURVA 90° METRICA SV 60° Metric female 90° swept elbow Embout femelle 90° cône 60° DKM 90° bogen 60° konus Hembra 90° rosca metrica asiento 60° |  | 49 - 50 |














Raccordi a pressione - SERIE STANDARD
INDICE

| DESCRIZIONE - DESCRIPTION - BESCHREIBUNG - DESCRIPTION | CODICE | PAG. |
|--|---|---------|
| CURVA 45° METRICA SV 60 Metric female 45° swept elbow Embout femelle 45° cône 60° DKM 45° bogen, konus 60° Hembra 45° rosca metrica asiento 60° |  | 51 - 52 |
| MASCHIO METRICO 24° DKOL Metric male 24° cone l.t. Mâle métrique 24 série L CEL DOK-L metrisch Macho rosca metrica asiento 24° serie L |  | 53 |
| FEMMINA METRICA O-RING 24° DKOL O-Ring metric female 24° cone l.t. Femelle droite cone 24° O-Ring DKO-L innengew mit O-Ring Hembra rosca metrica asiento 24° O-Ring serie L |  | 54 |
| CURVA 90° METRICA O-RING 24° DKOL 90° O-Ring metric swept elbow 24° cone l.t. Embout femelle 90° cône 24° O-Ring série L DKO-L 90° bogen reihe L Hembra 90° rosca metrica asiento 24° O-Ring serie L |  | 55 |
| CURVA 45° METRICA O-RING 24° DKOL-45° 45° O-Ring metric swept elbow 24° cone l.t. Embout femelle 45° cône 24° O-Ring. série L DKO-L 45° bogen reihe L Hembra 45° rosca metrica asiento 24° O-Ring serie L |  | 56 |
| MASCHIO METRICO 24° DKOS Metric male 24° cone h.t. Mâle métrique 24 série S CES DOK-S metrisch Macho rosca metrica asiento 24° serie S |  | 57 |
| FEMMINA METRICA O-RING 24° DKOS O-Ring metric female 24° cone h.t. Femelle droite cône 24° O-Ring série S DKO-S innengew mit O-Ring Hembra rosca metrica asiento 24° O-Ring serie S |  | 58 |
| CURVA 90° METRICA O-RING 24° DKOS 90° O-Ring metric swept elbow 24° cone h.t. Embout femelle 90° cône 24° O-Ring série S DKO-S 90° bogen reihe S Hembra 90° rosca metrica asiento 24° O-Ring serie S |  | 59 |
| CURVA 45° METRICA O-RING 24° DKOS 45° O-Ring metric swept elbow 24° cone h.t. Embout femelle 45° cone 24° O-Ring série S DKO-S 45° bogen reihe S Hembra 45° rosca metrica asiento 24° O-Ring serie S |  | 60 |
| MASCHIO METRICO SV 24° SERIE FRANCESE Metric male 24° french type Embout mâle cone 24° tube gaz AGF 24° innen konus (fr. reihe gas) Macho rosca metrica asiento 24° tubo gas |  | 61 |
| FEMMINA METRICA DIRITTA 24° SERIE FRANCESE Metric female 24° french type Femelle métrique droite 24° série française DKM mit 24° Konus franzoesische Serie Hembra recta métrica 24° series francesa |  | 62 |
| CURVA 90° METRICA SERIE FRANCESE 24° 90° metric swept elbow 24° french type Embout femelle 90° cône 24° série L DKF 90° bogen (fr. Reihe gas) Hembra 90° rosca metrica asiento 24° serie Francesa |  | 63 |
| CURVA 45° METRICA SERIE FRANCESE 24° 45° metric swept elbow 24° french type Embout femelle 45° cône 24° série L DKF 45° bogen (fr. Reihe gas) Hembra 45° rosca metrica asiento 24° serie Francesa |  | 64 |














Raccordi a pressare - SERIE STANDARD
INDICE

| DESCRIZIONE - DESCRIPTION - BESCHREIBUNG - DESCRIPTION | CODICE | PAG. |
|---|---|---------|
| MASCHIO ORFS ORFS male Mâle ORFS AGF ORFS Stirndichtend Macho ORFS |  | 65 |
| FEMMINA DIRITTA ORFS ORFS straight female Femelle ORFS ORFS - UNF gewinde Hembra ORFS |  | 66 |
| CURVA 90° ORFS 90° ORFS female ORFS femelle 90° DK 90° bogen ORFS UNF, stirndichtend Hembra codo 90° |  | 67 |
| CURVA 45° ORFS 45° ORFS female ORFS femelle 45° DK 45° bogen ORFS UNF stirndichtend Hembra codo 45° |  | 68 |
| GIUNZIONE TUBO DIRITTA Double connector Jonction tuyaux droite Verbindungs nippel Conexión recta por manquera |  | 69 |
| CODOLO A SALDARE Lifesaver insert Queue à souder Schweiss nippel Espiga a soldar |  | 70 |
| ERMETO DIRITTO FRANCESE Straight standpipe french type Embout lisse droit Französischer Rohrstopfen französisch Espiga lisa recta |  | 71 |
| ERMETO DIRITTO Straight standpipe Embout lisse droit Rohrstopfen Espiga lisa recta |  | 72 - 73 |
| OCCHIO GAS BSP banjo Banjo à sertir BSP Ringnippel für holschraube BSP Esferico orientable gas |  | 74 |
| OCCHIO METRICO Metrici banjo Banjo à sertir métrique Ringnippel für holschraube metrisch Esferico orientable metrico |  | 75 - 76 |
| FLANGIA DIRITTA SAE 3000 Straight flange 3000 PSI Embout à bride 3000 PSI droit Flanschanschluss 3000 PSI Brida recta 3000 PSI |  | 77 |
| FLANGIA 90° INTERA SAE 3000 90° Flange one piece 3000 PSI Embout à bride 90° 3000 PSI 90° Flanschanschluss 3000 PSI Brida 90° 3000 PSI |  | 78 |
| FLANGIA 45° INTERA SAE 3000 45° Flange one piece 3000 PSI Embout à bride 45° 3000 PSI 45° Flanschanschluss 3000 PSI Brida 45° 3000 PSI |  | 79 |

Raccordi a pressione - SERIE INTERLOCK
INDICE

| DESCRIZIONE - DESCRIPTION - BESCHREIBUNG - DESCRIPTION | CODICE | PAG. |
|--|---|------|
| BOCCOLA 4SH Ferrule 4SH Jupe 4SH Presshülse 4SH Casquillo 4SH |  | 89 |
| BOCCOLA H13 Ferrule H13 Jupe H13 Presshülse H13 Casquillo H13 |  | 90 |
| MASCHIO GAS SV 60° BSP male parallel 60° Embout mâle BSP 60° AGR 60° innenkonus (BSP gewinde) Macho gas cilindrico asiento 60° |  | 91 |
| MASCHIO GAS CONICO BSP taper male Mâle BSP conique 60° AGR konisch (BSP) Macho gas conico |  | 92 |
| FEMMINA GAS DADO SPINATO BSP female thrust wired nut Embout femelle droite écrou à jonc DKOR BSP konus mit O-Ring (BSP gewinde) Hembra rosca gastuerca sujetada con perno |  | 93 |
| CURVA 90° GAS DADO SPINATO 90° BSP female thrust wired nut Embout femelle 90° BSP écrou à jonc DKOR 90° bogen mit O-Ring (BSP gewinde) Hembra 90° rosca tuerca sujetada con perno |  | 94 |
| CURVA 45° GAS DADO SPINATO 45° BSP female thrust wired nut Embout femelle 45° BSP écrou à jonc DKOR 45° bogen mit O-Ring (BSP gewinde) Hembra 45° rosca tuerca sujetada con perno |  | 95 |
| MASCHIO NPTF SV 60° NPTF male 60° Mâle NPTF 60° AGN 60° innenkonus (NPTF) Macho NPTF asiento 60° |  | 96 |
| MASCHIO JIC 74° JIC male sv 74° Mâle JIC 74° AGJ 74° JIC aussenkonus (UNF gewinde) Macho rosca UNF asiento JIC-74° |  | 97 |
| FEMMINA JIC 74° DADO SPINATO JIC female 74° thrust wired nut Embout femelle JIC 74° écrou à jonc DKJ 74° (UNF) verstiftete mutter Hembra rosca UNF asiento JIC-74° tuerca sujetada con perno |  | 98 |
| CURVA 90° JIC SV 74° DADO SPINATO 90° JIC female swept elbow 74° cone seat wired nut Embout femelle 90° JIC 74° filet UNF écrou à jonc DKJ 90° bogen 74° dicht kopf (UNF) verstiftete mutter Hembra 90° rosca UNF asiento JIC-74° tuerca sujetada con perno |  | 99 |
| CURVA 45° JIC SV 74° DADO SPINATO 45° JIC female swept elbow 74° cone seat wired nut Embout femelle 45° JIC 74° filet UNF écrou à jonc DKJ 45° bogen 74° dicht kopf (UNF) verstiftete mutter Hembra 45° rosca UNF asiento JIC-74° tuerca sujetada con perno |  | 100 |
| MASCHIO METRICO SV 24° SERIE PESANTE DKOS Metric male 24° cone h.t. Mâle métrique 24° série S Ces DKO-S metrish Macho rosca metrica asiento 24° serie S |  | 101 |


Raccordi a pressione - SERIE INTERLOCK
INDICE

| DESCRIZIONE - DESCRIPTION - BESCHREIBUNG - DESCRIPTION | CODICE | PAG. |
|--|---|------|
| FEMMINA METRICA O-RING SERIE PESANTE DKOS O-Ring metric female h.t. Embout femelle droite O-Ring 24° série S DKO-S innengew mit O-Ring Hembra rosca metrica O-Ring serie S |  | 102 |
| CURVA 90° METRICA O-RING SERIE PESANTE DKOS 90° O-Ring metric female h.t. Embout femelle 90° O-Ring série S DKO-S 90° bogen, reines Hembra 90° rosca metrica O-Ring serie S |  | 103 |
| CURVA 45° METRICA O-RING SERIE PESANTE DKOS 45° O-Ring metric female h.t. Embout femelle 45° O-Ring série S DKOS 45° bogen reines Hembra 45° rosca metrica O-Ring serie S |  | 104 |
| FEMMINA ORFS ORFS female Femelle ORFS ORFS unf gewinde Hembra ORFS |  | 105 |
| CURVA 90° ORFS 90° ORFS female ORFS femelle 90° DK 90° bogen ORFS - UNF, stirndichtend Hembra codo 90° |  | 106 |
| CURVA 45° ORFS 45° ORFS female ORFS femelle 45° DK 45° bogen ORFS - UNF, stirndichtend Hembra codo 45° |  | 107 |
| FLANGIA DIRITTA SAE 3000 Straight flange 3000 PSI Embout à bride 3000 PSI droite Flanschanschluss 3000 PSI Brida recta 3000 PSI |  | 108 |
| FLANGIA 90° SAE 3000 90° SAE flange 3000 PSI Embout à bride SAE 90° 3000 PSI 90° flanschanschluss 3000 PSI Brida 90° 3000 PSI SAE |  | 109 |
| FLANGIA 45° SAE 3000 45° SAE flange 3000 PSI Embout à bride 45° 3000 PSI 45° flanschanschluss 3000 PSI Brida 45° 3000 PSI SAE |  | 110 |
| FLANGIA DIRITTA SAE 6000 Straight flange 6000 PSI Embout à bride 6000 PSI droite Flanschanschluss 6000 PSI Brida recta 6000 PSI |  | 111 |
| FLANGIA 90° SAE 6000 90° SAE flange 6000 PSI Embout à bride SAE 90° 6000 PSI 90° flanschanschluss 6000 PSI Brida 90° 6000 PSI SAE |  | 112 |
| FLANGIA 45° SAE 6000 45° SAE flange 6000 PSI Embout à bride 45° 6000 PSI 45° flanschanschluss 6000 PSI Brida 45° 6000 PSI SAE |  | 113 |
| FLANGIA DIRITTA SUPERCAT Straight SAE flange SUPERCAT Embout à bride SUPERCAT droite Flanschanschluss SUPERCAT Brida recta SUPERCAT |  | 114 |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R1A

Ferrule R1A
Jupe R1A
Presshülse R1A
Casquillo R1A

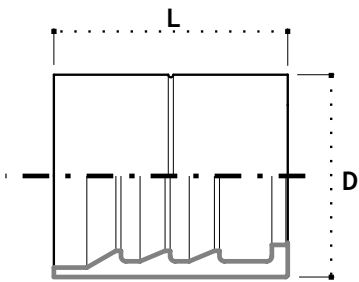


The diagram shows a cross-section of a ferrule with a central hole. Dimension 'L' is the length of the ferrule, and 'D' is its outer diameter. The ferrule has a series of longitudinal grooves on its outer surface and a chamfered edge on one end.

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|---|----|------|
| | DN | Pollici Inches | Diam. Size | F | | | | D | L |
| B1R03 | 5 | 3/16" | 03 | - | - | - | - | 17 | 26.4 |
| B1R04 | 6 | 1/4" | 04 | - | - | - | - | 20 | 29.5 |
| B1R05 | 8 | 5/16" | 05 | - | - | - | - | 22 | 29.6 |
| B1R06 | 10 | 3/8" | 06 | - | - | - | - | 24 | 32 |
| B1R08 | 12 | 1/2" | 08 | - | - | - | - | 29 | 34.3 |
| B1R10 | 16 | 5/8" | 10 | - | - | - | - | 32 | 37.2 |
| B1R12 | 20 | 3/4" | 12 | - | - | - | - | 36 | 43.2 |
| B1R16 | 25 | 1" | 16 | - | - | - | - | 43 | 50.6 |
| B1R20 | 32 | 1.1/4" | 20 | - | - | - | - | 52 | 56.7 |
| B1R24 | 40 | 1.1/2" | 24 | - | - | - | - | 57 | 63 |
| B1R32 | 50 | 2" | 32 | - | - | - | - | 70 | 78 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R2A

Ferrule R2A
 Jupe R2A
 Presshülse R2A
 Casquillo R2A

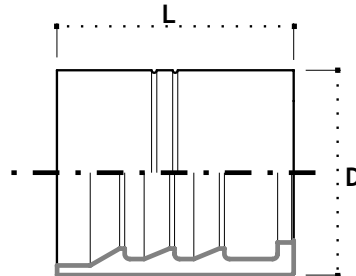

| Codice Code | Tubo - Hose | | | Filetto - Thread F | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|-----------------------|--------------|---|---|----|------|
| | DN | Pollici Inches | Diam. Size | | - | - | D | L | |
| B2R03 | 5 | 3/16" | 03 | - | - | - | - | 20 | 27.1 |
| B2R04 | 6 | 1/4" | 04 | - | - | - | - | 21 | 30.4 |
| B2R05 | 8 | 5/16" | 05 | - | - | - | - | 24 | 30.3 |
| B2R06 | 10 | 3/8" | 06 | - | - | - | - | 26 | 32.4 |
| B2R08 | 12 | 1/2" | 08 | - | - | - | - | 30 | 34 |
| B2R10 | 16 | 5/8" | 10 | - | - | - | - | 34 | 37.5 |
| B2R12 | 20 | 3/4" | 12 | - | - | - | - | 38 | 43.2 |
| B2R16 | 25 | 1" | 16 | - | - | - | - | 46 | 50 |
| B2R20 | 32 | 1.1/4" | 20 | - | - | - | - | 56 | 59 |
| B2R24 | 40 | 1.1/2" | 24 | - | - | - | - | 62 | 63 |
| B2R32 | 50 | 2" | 32 | - | - | - | - | 75 | 78.9 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

| | |
|--------------------|--|
| BOCCOLA R1T | |
|--------------------|--|

| | |
|---|--|
| <p>Ferrule R1T Jupe R1T Presshülse R1T Casquillo R1T</p> | |
|---|--|

| Codice Code | Tubo - Hose | | | Filetto - Thread F | | Dimension mm | | | |
|-------------|-------------|----------------|------------|-----------------------|---|--------------|---|------|------|
| | DN | Pollici Inches | Diam. Size | | | - | - | D | L |
| B1T03 | 5 | 3/16" | 03 | - | - | - | - | 19 | 26 |
| B1T04 | 6 | 1/4" | 04 | - | - | - | - | 20 | 30.5 |
| B1T05 | 8 | 5/16" | 05 | - | - | - | - | 22 | 30.5 |
| B1T06 | 10 | 3/8" | 06 | - | - | - | - | 24 | 31.5 |
| B1T08 | 12 | 1/2" | 08 | - | - | - | - | 29 | 34 |
| B1T10 | 16 | 5/8" | 10 | - | - | - | - | 32 | 37 |
| B1T12 | 20 | 3/4" | 12 | - | - | - | - | 42.5 | 36 |
| B1T16 | 25 | 1" | 16 | - | - | - | - | 43 | 50.5 |
| B1T20 | 32 | 1.1/4" | 20 | - | - | - | - | 53 | 59 |
| B1T24 | 40 | 1.1/2" | 24 | - | - | - | - | 60 | 63 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R2T


Ferrule R2T
Jupe R2T
Presshülse R2T
Casquillo R2T

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|---|---|------|------|
| | DN | Pollici Inches | Diam. Size | | F | - | - | D | L |
| B2T03 | 5 | 3/16" | 03 | - | - | - | - | 20 | 26 |
| B2T04 | 6 | 1/4" | 04 | - | - | - | - | 22 | 30.5 |
| B2T05 | 8 | 5/16" | 05 | - | - | - | - | 24 | 30.5 |
| B2T06 | 10 | 3/8" | 06 | - | - | - | - | 25.5 | 31.5 |
| B2T08 | 12 | 1/2" | 08 | - | - | - | - | 30 | 34 |
| B2T10 | 16 | 5/8" | 10 | - | - | - | - | 34 | 37 |
| B2T12 | 20 | 3/4" | 12 | - | - | - | - | 38 | 42.5 |
| B2T16 | 25 | 1" | 16 | - | - | - | - | 46 | 50 |
| B2T20 | 32 | 1.1/4" | 20 | - | - | - | - | 56 | 59 |
| B2T24 | 40 | 1.1/2" | 24 | - | - | - | - | 64 | 63 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R12T

Ferrule R12T
 Jupe R12T
 Presshülse R12T
 Casquillo R12T

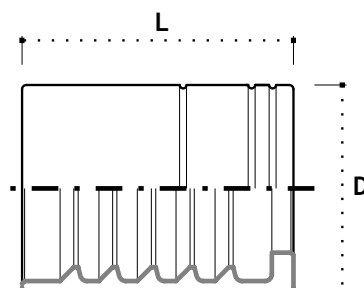

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|-------------|-------------|----------------|------------|------------------|---|--------------|---|----|------|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| B12T08 | 12 | 1/2" | 08 | - | - | - | - | 29 | 35 |
| B12T10 | 16 | 5/8" | 10 | - | - | - | - | 32 | 37.5 |
| B12T12 | 20 | 3/4" | 12 | - | - | - | - | 36 | 42.5 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R12TN

Ferrule R12TN
 Jupe R12TN
 Presshülse R12TN
 Casquillo R12TN


The diagram shows a cross-section of a ferrule with a series of longitudinal grooves on its inner surface. Dimension 'L' is indicated as the total length of the ferrule, and dimension 'D' is indicated as the outer diameter.

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|---|---|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| B12T03N | 5 | 3/16" | 03 | - | - | - | - | 21 | 23 |
| B12T04N | 6 | 1/4" | 04 | - | - | - | - | 23 | 30 |
| B12T05N | 8 | 5/16" | 05 | - | - | - | - | 24 | 30 |
| B12T06N | 10 | 3/8" | 06 | - | - | - | - | 26 | 32 |
| B12T08N | 12 | 1/2" | 08 | - | - | - | - | 29 | 34 |
| B12T10N | 16 | 5/8" | 10 | - | - | - | - | 33 | 37 |
| B12T12N | 20 | 3/4" | 12 | - | - | - | - | 37 | 42 |
| B12T16N | 25 | 1" | 16 | - | - | - | - | 46 | 51 |
| B12T20N | 32 | 1.1/4" | 20 | - | - | - | - | 59 | 59 |
| B12T24N | 40 | 1.1/2" | 24 | - | - | - | - | 67 | 67 |
| B12T32N | 50 | 2" | 32 | - | - | - | - | 80 | 72 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA 1SC - 1SN - 2SC

Ferrule 1SC - 1SN - 2SC
 Jupe 1SC - 1SN - 2SC
 Presshülse 1SC - 1SN - 2SC
 Casquillo 1SC - 1SN - 2SC

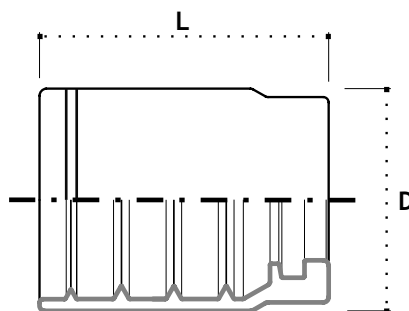


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|---|---|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| B1SC04 | 6 | 1/4" | 04 | - | - | - | - | 20 | 30 |
| B1SC05 | 8 | 5/16" | 05 | - | - | - | - | 22 | 30 |
| B1SC06 | 10 | 3/8" | 06 | - | - | - | - | 24 | 32 |
| B1SC08 | 12 | 1/2" | 08 | - | - | - | - | 28 | 34 |
| B1SC10 | 16 | 5/8" | 10 | - | - | - | - | 32 | 37 |
| B1SC12 | 20 | 3/4" | 12 | - | - | - | - | 35 | 42 |
| B1SC16 | 25 | 1" | 16 | - | - | - | - | 43 | 51 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R3 - R4

Ferrule R3 - R4
 Jupe R3 - R4
 Presshülse R3 - R4
 Casquillo R3 - R4

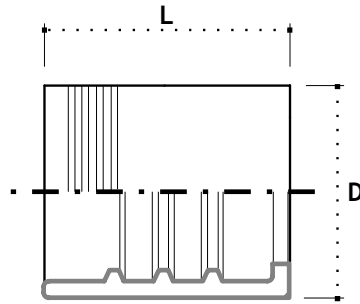


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|---|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| B3R10 | 16 | 5/8" | 10 | - | - | - | - | 32 | 36 |
| B3R12 | 20 | 3/4" | 12 | - | - | - | - | 38 | 42 |
| B3R16 | 25 | 1 | 16 | - | - | - | - | 46 | 50 |
| B3R20 | 32 | 1.1/4" | 20 | - | - | - | - | 52 | 57 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R9R

Ferrule R9R
 Jupe R9R
 Presshülse R9R
 Casquillo R9R

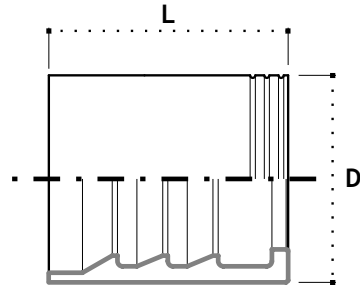

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|---|----|------|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| B9R04 | 6 | 1/4" | 04 | - | - | - | - | 21 | 30.5 |
| B9R06 | 10 | 3/8" | 06 | - | - | - | - | 26 | 32 |
| B9R08 | 12 | 1/2" | 08 | - | - | - | - | 30 | 34 |
| B9R10 | 16 | 5/8" | 10 | - | - | - | - | 34 | 40 |
| B9R12 | 20 | 3/4" | 12 | - | - | - | - | 38 | 51.5 |
| B9R16 | 25 | 1" | 16 | - | - | - | - | 46 | 60 |
| B9R20 | 32 | 1.1/4" | 20 | - | - | - | - | 56 | 66 |
| B9R24 | 40 | 1.1/2" | 24 | - | - | - | - | 65 | 76.5 |
| B9R32 | 50 | 2" | 32 | - | - | - | - | 80 | 80 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA 4SH


Ferrule 4SH
 Jupe 4SH
 Presshülse 4SH
 Casquillo 4SH

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|---|---|----|------|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| B4SH20 | 32 | 1.1/4" | 20 | - | - | - | - | 52 | 66 |
| B4SH24 | 40 | 1.1/2" | 24 | - | - | - | - | 62 | 76.5 |
| B4SH32 | 50 | 2" | 32 | - | - | - | - | 75 | 80 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

BOCCOLA R7

Ferrule R7
 Jupe R7
 Presshülse R7
 Casquillo R7

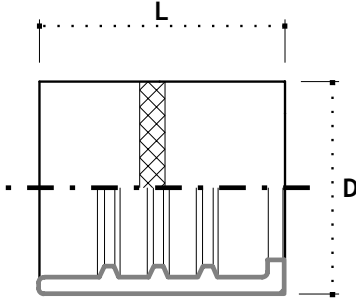

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|---|---|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| B7R03 | 5 | 3/16" | 03 | - | - | - | - | 14 | 30 |
| B7R04 | 6 | 1/4" | 04 | - | - | - | - | 17 | 30.2 |
| B7R05 | 8 | 5/16" | 05 | - | - | - | - | 19 | 29.8 |
| B7R06 | 10 | 3/8" | 06 | - | - | - | - | 21 | 30.4 |
| B7R08 | 12 | 1/2" | 08 | - | - | - | - | 25.5 | 34.2 |
| B7R10 | 16 | 5/8" | 10 | - | - | - | - | 28.5 | 36.3 |
| B7R12 | 20 | 3/4" | 12 | - | - | - | - | 32.1 | 42.4 |
| B7R16 | 25 | 1" | 16 | - | - | - | - | 40 | 50.2 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

| | | |
|---|--|--|
| MASCHIO GAS SV 60° | | |
| <p>BSP male parallel 60°</p> <p>Mãle gaz 60°</p> <p>AGR 60°innenkonus (BSP gewinde)</p> <p>Macho gas cilindrico asiento 60°</p> | | |

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MG0302 | 5 | 3/16" | 03 | 1/8" - 28 | - | - | 15 | 21 | 45 |
| MG0304 | 5 | 3/16" | 03 | 1/4" - 19 | - | - | 19 | 26 | 51 |
| MG0402 | 6 | 1/4" | 04 | 1/8" - 28 | - | - | 15 | 21 | 49 |
| MG0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | - | 19 | 27 | 55 |
| MG0406 | 6 | 1/4" | 04 | 3/8" - 19 | - | - | 22 | 29 | 57 |
| MG0408 | 6 | 1/4" | 04 | 1/2" - 14 | - | - | 27 | 32 | 60 |
| MG0504 | 8 | 5/16" | 05 | 1/4" - 19 | - | - | 19 | 27 | 55 |
| MG0506 | 8 | 5/16" | 05 | 3/8" - 19 | - | - | 22 | 29 | 57 |
| MG0508 | 8 | 5/16" | 05 | 1/2" - 14 | - | - | 27 | 32 | 60 |
| MG0604 | 10 | 3/8" | 06 | 1/4" - 19 | - | - | 19 | 27 | 57 |
| MG0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | - | 22 | 29 | 59 |
| MG0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | - | 27 | 32 | 62 |
| MG0806 | 12 | 1/2" | 08 | 3/8" - 19 | - | - | 19 | 29 | 62 |
| MG0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | - | 27 | 33 | 66 |
| MG0810 | 12 | 1/2" | 08 | 5/8" - 14 | - | - | 28 | 35 | 68 |
| MG0812 | 12 | 1/2" | 08 | 3/4" - 14 | - | - | 32 | 36 | 69 |
| MG1008 | 16 | 5/8" | 10 | 1/2" - 14 | - | - | 27 | 33 | 69 |
| MG1010 | 16 | 5/8" | 10 | 5/8" - 14 | - | - | 28 | 35 | 71 |
| MG1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | - | 32 | 36 | 72 |
| MG1208 | 20 | 3/4" | 12 | 1/2" - 14 | - | - | 27 | 34 | 75 |
| MG1210 | 20 | 3/4" | 12 | 5/8" - 14 | - | - | 28 | 36 | 77 |
| MG1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 32 | 37 | 78 |
| MG1216 | 20 | 3/4" | 12 | 1" - 11 | - | - | 38 | 40 | 80 |

Raccordi a pressione - SERIE STANDARD


MASCHIO GAS SV 60°

BSP male parallel 60°

Mâle gaz 60°

AGR 60° innenkonus
(BSP gewinde)

Macho gas cilindrico asiento
60°

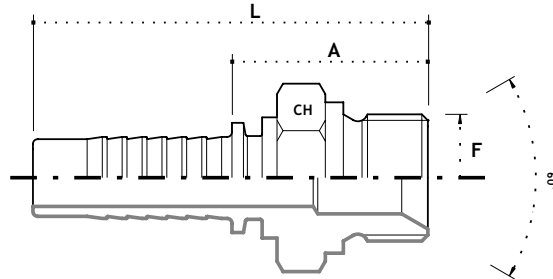


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|-----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MG1612 | 25 | 1" | 16 | 3/4" - 14 | - | - | 32 | 38 | 93 |
| MG1616 | 25 | 1" | 16 | 1" - 11 | - | - | 38 | 40 | 95 |
| MG1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | - | 50 | 45 | 100 |
| MG2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 50 | 46 | 106 |
| MG2024 | 32 | 1.1/4" | 20 | 1.1/2" - 11 | - | - | 55 | 46 | 107 |
| MG2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | - | 55 | 46 | 117 |
| MG2432 | 40 | 1.1/2" | 24 | 2" - 11 | - | - | 70 | 53 | 124 |
| MG3232 | 50 | 2" | 32 | 2" - 11 | - | - | 70 | 54 | 134 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FEMMINA GAS SV 60°

BSP straight female 60°
 Femelle droite 60°
 AGR 60° konus (BSP gewinde)
 Tuerca giratoria recta BSP 60°

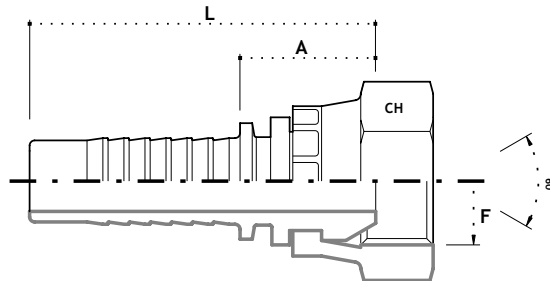

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|----|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDG0302 | 5 | 3/16" | 03 | 1/8"-28 | - | - | 15 | 18 | 43 |
| FDG0304 | 5 | 3/16" | 03 | 1/4"-19 | - | - | 19 | 18 | 43 |
| FDG0402 | 6 | 1/4" | 04 | 1/8"-28 | - | - | 15 | 18 | 46 |
| FDG0404 | 6 | 1/4" | 04 | 1/4"-19 | - | - | 19 | 18 | 46 |
| FDG0406 | 6 | 1/4" | 04 | 3/8"-19 | - | - | 22 | 19 | 47 |
| FDG0408 | 6 | 1/4" | 04 | 1/2"-14 | - | - | 27 | 21 | 49 |
| FDG0504 | 8 | 5/16" | 05 | 1/4"-19 | - | - | 19 | 18 | 46 |
| FDG0506 | 8 | 5/16" | 05 | 3/8"-19 | - | - | 22 | 19 | 47 |
| FDG0508 | 8 | 5/16" | 05 | 1/2"-14 | - | - | 27 | 21 | 49 |
| FDG0604 | 10 | 3/8" | 06 | 1/4"-19 | - | - | 19 | 19 | 49 |
| FDG0606 | 10 | 3/8" | 06 | 3/8"-19 | - | - | 22 | 20 | 50 |
| FDG0608 | 10 | 3/8" | 06 | 1/2"-14 | - | - | 27 | 21 | 51 |
| FDG0806 | 12 | 1/2" | 08 | 3/8"-19 | - | - | 19 | 20 | 53 |
| FDG0808 | 12 | 1/2" | 08 | 1/2"-14 | - | - | 27 | 22 | 55 |
| FDG0810 | 12 | 1/2" | 08 | 5/8"-14 | - | - | 28 | 22 | 55 |
| FDG0812 | 12 | 1/2" | 08 | 3/4"-14 | - | - | 32 | 24 | 57 |
| FDG1008 | 16 | 5/8" | 10 | 1/2"-14 | - | - | 27 | 22 | 58 |
| FDG1010 | 16 | 5/8" | 10 | 5/8"-14 | - | - | 28 | 23 | 59 |
| FDG1012 | 16 | 5/8" | 10 | 3/4"-14 | - | - | 32 | 24 | 60 |
| FDG1208 | 20 | 3/4" | 12 | 1/2"-14 | - | - | - | - | - |
| FDG1210 | 20 | 3/4" | 12 | 5/8"-14 | - | - | 28 | 24 | 66 |
| FDG1212 | 20 | 3/4" | 12 | 3/4"-14 | - | - | 32 | 25 | 66 |
| FDG1216 | 20 | 3/4" | 12 | 1"-11 | - | - | 38 | 26 | 67 |

Raccordi a pressione - SERIE STANDARD


FEMMINA GAS SV 60°

BSP straight female 60°

Femelle droite 60°

AGR 60° konus (BSP gewinde)

Tuerca giratoria recta BSP 60°

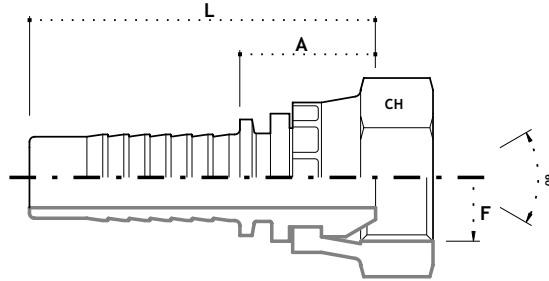

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|-----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDG1612 | 25 | 1" | 16 | 3/4" - 14 | - | - | - | - | |
| FDG1616 | 25 | 1" | 16 | 1" - 11 | - | - | 38 | 27 | 82 |
| FDG1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | - | 50 | 30 | 85 |
| FDG2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 50 | 30 | 91 |
| FDG2024 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 55 | 32 | 93 |
| FDG2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | - | 55 | 32 | 103 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° GAS SV 60°

BSP female 90° swept elbow

Femelle 90° cône 60° BSP

DKR 90° bogen 60° konus
(BSP gewinde)

Tuerca giratoria 90° BSP

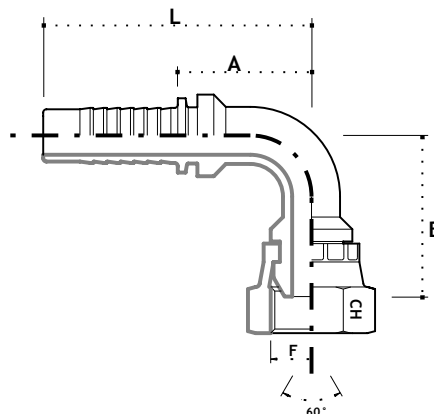

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90G0302 | 5 | 3/16" | 03 | 1/8" - 28 | - | 15 | 29 | 23 | 47.5 |
| F90G0304 | 5 | 3/16" | 03 | 1/4" - 19 | - | 19 | 29 | 23 | 47.5 |
| F90G0402 | 6 | 1/4" | 04 | 1/8" - 28 | - | 15 | 29 | 23 | 51 |
| F90G0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | 19 | 29 | 23 | 51 |
| F90G0406 | 6 | 1/4" | 04 | 3/8" - 19 | - | 22 | 32 | 23 | 51 |
| F90G0408 | 6 | 1/4" | 04 | 1/2" - 14 | - | - | - | - | - |
| F90G0504 | 8 | 5/16" | 05 | 1/4" - 19 | - | 19 | 33.5 | 31.5 | 59.5 |
| F90G0506 | 8 | 5/16" | 05 | 3/8" - 19 | - | 22 | 35.5 | 31.5 | 59.5 |
| F90G0508 | 8 | 5/16" | 05 | 1/2" - 14 | - | 27 | 39 | 31.5 | 59.5 |
| F90G0604 | 10 | 3/8" | 06 | 1/4" - 19 | - | 19 | 37 | 33 | 63 |
| F90G0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | 22 | 38 | 33 | 63 |
| F90G0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | 27 | 42 | 33 | 63 |
| F90G0806 | 12 | 1/2" | 08 | 3/8" - 19 | - | 22 | 43 | 39 | 72 |
| F90G0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | 27 | 45 | 39 | 72 |
| F90G0810 | 12 | 1/2" | 08 | 5/8" - 14 | - | 28 | 45 | 39 | 72 |
| F90G0812 | 12 | 1/2" | 08 | 3/4" - 14 | - | 32 | 51 | 39 | 72 |
| F90G1008 | 16 | 5/8" | 10 | 1/2" - 14 | - | 27 | 54 | 49 | 85 |
| F90G1010 | 16 | 5/8" | 10 | 5/8" - 14 | - | 28 | 54 | 49 | 85 |
| F90G1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | 32 | 56 | 49 | 85 |
| F90G1208 | 20 | 3/4" | 12 | 1/2" - 14 | - | - | - | - | - |
| F90G1210 | 20 | 3/4" | 12 | 5/8" - 14 | - | - | - | - | - |
| F90G1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | 32 | 59 | 53.5 | 94.5 |
| F90G1216 | 20 | 3/4" | 12 | 1" - 11 | - | 38 | 65 | 53.5 | 94.5 |

Raccordi a pressione - SERIE STANDARD


CURVA 90° GAS SV 60°

BSP female 90° swept elbow

Femelle 90° cône 60° BSP

DKR 90° bogen 60° konus
(BSP gewinde)

Tuerca giratoria 90° BSP

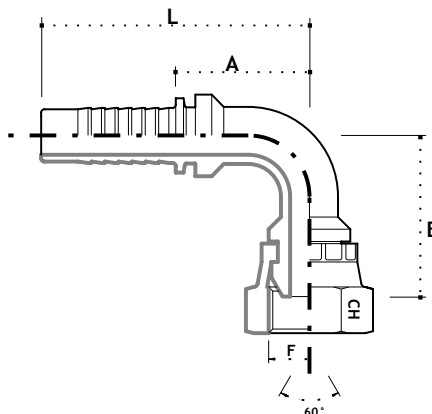

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90G1612 | 25 | 1" | 16 | 3/4" - 14 | - | - | - | - | - |
| F90G1616 | 25 | 1" | 16 | 1" - 11 | - | 38 | 72 | 73 | 128 |
| F90G1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | 50 | 80 | 73 | 128 |
| F90G2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | 50 | 93 | 89 | 150 |
| F90G2024 | 32 | 1.1/4" | 20 | 1.1/2" - 11 | - | 55 | 98.5 | 89 | 150 |
| F90G2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | 55 | 114 | 101 | 172 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

| | | |
|---|--|--|
| CURVA 45° GAS SV 60° | | |
| <p>BSP female 45° swept elbow</p> <p>Embout femelle 45° cône 60° BSP</p> <p>BSP 45° winkel - aufschraub konus 60°</p> <p>Tuerca giratoria 45° BSP</p> | | |

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|-------------|-------------|----------------|------------|------------------|---------|--------------|----|----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45G0302 | 5 | 3/16" | 03 | 1/8" - 28 | - | 15 | 17 | 40 | 65 |
| F45G0304 | 5 | 3/16" | 03 | 1/4" - 19 | - | 19 | 17 | 40 | 65 |
| F45G0402 | 6 | 1/4" | 04 | 1/8" - 28 | - | 15 | 17 | 40 | 68 |
| F45G0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | 19 | 17 | 40 | 68 |
| F45G0406 | 6 | 1/4" | 04 | 3/8" - 19 | - | 22 | 20 | 43 | 71 |
| F45G0408 | 6 | 1/4" | 04 | 1/2" - 14 | - | - | - | - | - |
| F45G0504 | 8 | 5/16" | 05 | 1/4" - 19 | - | 19 | 20 | 51 | 79 |
| F45G0506 | 8 | 5/16" | 05 | 3/8" - 19 | - | 22 | 21 | 52 | 80 |
| F45G0508 | 8 | 5/16" | 05 | 1/2" - 14 | - | 27 | 24 | 55 | 83 |
| F45G0604 | 10 | 3/8" | 06 | 1/4" - 19 | - | 19 | 19 | 54 | 84 |
| F45G0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | 22 | 20 | 55 | 85 |
| F45G0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | 27 | 23 | 58 | 88 |
| F45G0806 | 12 | 1/2" | 08 | 3/8" - 19 | - | 22 | 20 | 63 | 96 |
| F45G0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | 27 | 23 | 65 | 98 |
| F45G0810 | 12 | 1/2" | 08 | 5/8" - 14 | - | 28 | 23 | 65 | 98 |
| F45G0812 | 12 | 1/2" | 08 | 3/4" - 14 | - | 32 | 21 | 66 | 99 |
| F45G1008 | 16 | 5/8" | 10 | 1/2" - 14 | - | 27 | 25 | 63 | 99 |
| F45G1010 | 16 | 5/8" | 10 | 5/8" - 14 | - | 28 | 25 | 64 | 99 |
| F45G1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | 32 | 26 | 64 | 100 |
| F45G1208 | 20 | 3/4" | 12 | 1/2" - 14 | - | 27 | 28 | 62 | 103 |
| F45G1210 | 20 | 3/4" | 12 | 5/8" - 14 | - | 28 | 29 | 63 | 104 |
| F45G1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | 32 | 29 | 63 | 104 |
| F45G1216 | 20 | 3/4" | 12 | 1" - 11 | - | 38 | 31 | 65 | 105 |

Raccordi a pressione - SERIE STANDARD

CURVA 45° GAS SV 60°


BSP female 45° swept elbow
 Embout femelle 45° cône 60°
 BSP
 BSP 45° winkel - aufschraub
 konus 60°
 Tuerca giratoria 45° BSP

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45G1612 | 25 | 1" | 16 | 3/4" - 14 | - | 32 | 39 | 88 | 143 |
| F45G1616 | 25 | 1" | 16 | 1" - 11 | - | 38 | 41 | 90 | 145 |
| F45G1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | 50 | 44 | 93 | 148 |
| F45G2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | 50 | 44 | 102 | 163 |
| F45G2024 | 32 | 1.1/4" | 20 | 1.1/2" - 11 | - | 55 | 45 | 103 | 164 |
| F45G2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | 55 | 45 | 118 | 189 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FEMMINA GAS DADO LIBERO

BSP female free nut
 Femelle droite écrou libre
 DKR 60° konus (BSP gewinde)
 Hembra rosca gas asiento 60°

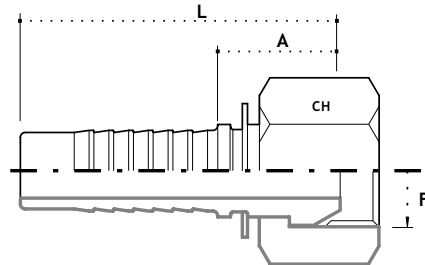

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDG0302SF | 5 | 3/16" | 03 | 1/8" - 28 | - | - | 15 | 18 | 43 |
| FDG0304SF | 5 | 3/16" | 03 | 1/4" - 19 | - | - | 19 | 18 | 43 |
| FDG0404SF | 6 | 1/4" | 04 | 1/4" - 19 | - | - | 19 | 18 | 46 |
| FDG0406SF | 6 | 1/4" | 04 | 3/8" - 19 | - | - | 22 | 19 | 47 |
| FDG0506SF | 8 | 5/16" | 05 | 3/8" - 19 | - | - | 22 | 19 | 47 |
| FDG0606SF | 10 | 3/8" | 06 | 3/8" - 19 | - | - | 22 | 20 | 50 |
| FDG0608SF | 10 | 3/8" | 06 | 1/2" - 14 | - | - | 27 | 21 | 51 |
| FDG0808SF | 12 | 1/2" | 08 | 1/2" - 14 | - | - | 27 | 22 | 55 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° GAS DADO LIBERO

90°BSP female free nut

Femelle 90° cône 60°
écrou libre

DKR 90° bogen 60° konus
(BSP gewinde)

Hembra 90° rosca gas
asiento 60°

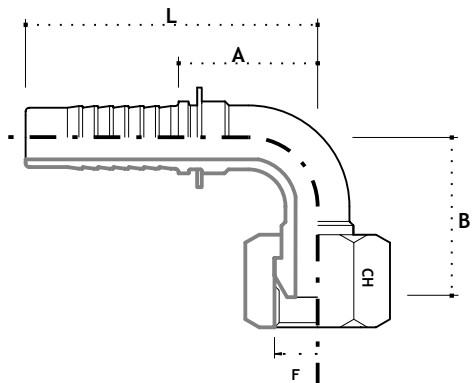

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90G0302SF | 5 | 3/16" | 03 | 1/8" - 28 | - | 15 | 29 | 23 | 47.5 |
| F90G0304SF | 5 | 3/16" | 03 | 1/4" - 19 | - | 19 | 29 | 23 | 47.5 |
| F90G0404SF | 6 | 1/4" | 04 | 1/4" - 19 | - | 19 | 29 | 23 | 51 |
| F90G0406SF | 6 | 1/4" | 04 | 3/8" - 19 | - | 22 | 32 | 23 | 51 |
| F90G0506SF | 8 | 5/16" | 05 | 3/8" - 19 | - | 22 | 35.5 | 31.5 | 59.5 |
| F90G0606SF | 10 | 3/8" | 06 | 3/8" - 19 | - | 22 | 38 | 33 | 63 |
| F90G0608SF | 10 | 3/8" | 06 | 1/2" - 14 | - | 27 | 42 | 33 | 63 |
| F90G0808SF | 12 | 1/2" | 08 | 1/2" - 14 | - | 27 | 45 | 39 | 72 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° DADO LIBERO

45° BSP female free nut

Embout femelle 45° cône 60°
écrou libre

DKR 45° bogen, konus 60°
(BSP gewinde)

Hembra 45° rosca gas
asiento 60°

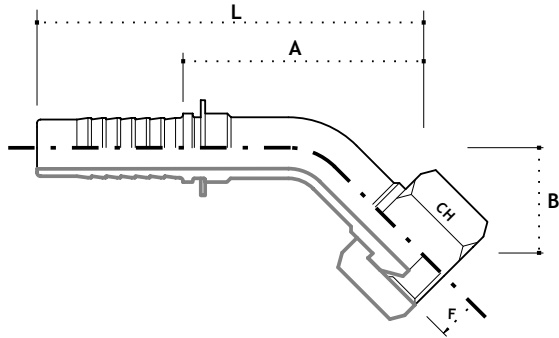

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45G0302SF | 5 | 3/16" | 03 | 1/8" - 28 | - | 15 | 17 | 40 | 65 |
| F45G0304SF | 5 | 3/16" | 03 | 1/4" - 19 | - | 19 | 17 | 40 | 65 |
| F45G0404SF | 6 | 1/4" | 04 | 1/4" - 19 | - | 19 | 17 | 40 | 68 |
| F45G0406SF | 6 | 1/4" | 04 | 3/8" - 19 | - | 22 | 20 | 43 | 71 |
| F45G0506SF | 8 | 5/16" | 05 | 3/8" - 19 | - | 22 | 21 | 52 | 80 |
| F45G0606SF | 10 | 3/8" | 06 | 3/8" - 19 | - | 22 | 20 | 55 | 85 |
| F45G0608F | 10 | 3/8" | 06 | 1/2" - 14 | - | 27 | 23 | 58 | 88 |
| F45G0808SF | 12 | 1/2" | 08 | 1/2" - 14 | - | 27 | 23 | 65 | 98 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA GAS DADO SPINATO CON O-RING

BSP O-Ring female thrust
wired nut

Femelle droite écrou à jonc
O-Ring

DKOR 60° konus mit O-Ring
(BSP gewinde)

Hembra rosca gas asiento 60°
O-Ring tuerca sujetada
con perno

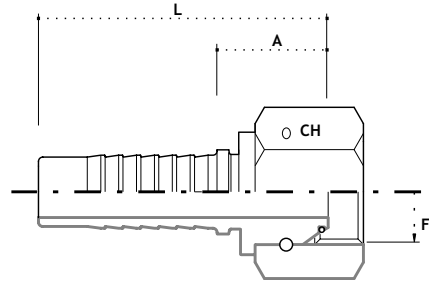

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|-----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDG1212SP | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 32 | 25 | 66 |
| FDG1216SP | 20 | 3/4" | 12 | 1" - 11 | - | - | 38 | 26 | 67 |
| FDG1616SP | 25 | 1" | 16 | 1" - 11 | - | - | 38 | 27 | 82 |
| FDG1620SP | 25 | 1" | 16 | 1.1/4" - 11 | - | - | 50 | 30 | 85 |
| FDG2020SP | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 50 | 30 | 91 |
| FDG2024SP | 32 | 1.1/4" | 20 | 1.1/2" - 11 | - | - | 55 | 32 | 93 |
| FDG2424SP | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | - | 55 | 32 | 103 |
| FDG2432SP | 40 | 1.1/2" | 24 | 2" - 11 | - | - | 70 | 33 | 104 |
| FDG3232SP | 50 | 2" | 32 | 2" - 11 | - | - | 70 | 34 | 114 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° GAS DADO SPINATO CON O-RING

90° BSP O-Ring thrust
wired nut

Femelle 90° cône 60°
O-Ring écrou à cheville

DKOR 90° bogen 60° konus
mit O-Ring (BSP gewinde)

Hembra 90° rosca gas asiento
60° O-Ring tuerca sujetada
con perno

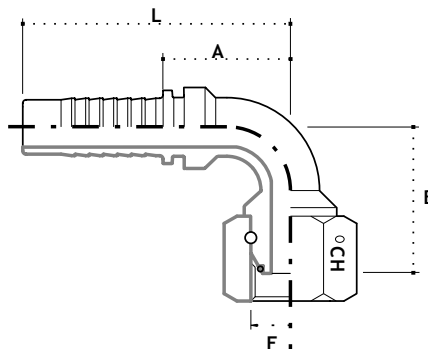

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90G1212SP | 20 | 3/4" | 12 | 3/4"-14 | - | 32 | 59 | 53.5 | 94.5 |
| F90G1216SP | 20 | 3/4" | 12 | 1"-11 | - | 38 | 65 | 53.5 | 94.5 |
| F90G1616SP | 25 | 1" | 16 | 1"-11 | - | 38 | 72 | 73 | 128 |
| F90G1620SP | 25 | 1" | 16 | 1.1/4"-11 | - | 50 | 80 | 73 | 128 |
| F90G2020SP | 32 | 1.1/4" | 20 | 1.1/4"-11 | - | 50 | 93 | 89 | 150 |
| F90G2024SP | 32 | 1.1/4" | 20 | 1.1/2"-11 | - | 55 | 98.5 | 89 | 150 |
| F90G2424SP | 40 | 1.1/2" | 24 | 1.1/2"-11 | - | 55 | 114 | 101 | 172 |
| F90G2432SP | 40 | 1.1/2" | 24 | 2"-11 | - | 70 | 118 | 101 | 172 |
| F90G3232SP | 50 | 2" | 32 | 2"-11 | - | 70 | 136 | 135 | 215 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° DADO SPINATO CON O-RING

45°BSP O-Ring thrust
wired nut

Emout femelle 45° BSP 60°
O-Ring écrou à cheville

DKOR 45° bogen 60°, konus
mit O-Ring (BSP gewinde)

Hembra 45° rosca gas
asiento 60° O-Ring tuerca
sujetada con perno

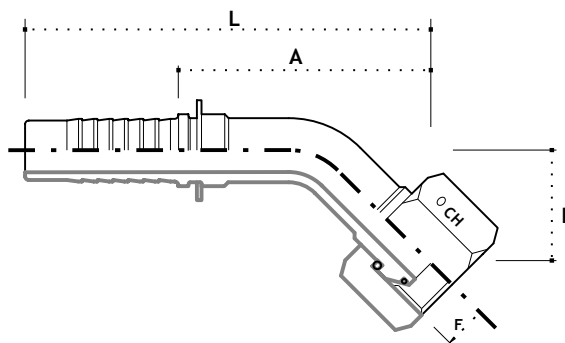


| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45G1212SP | 20 | 3/4" | 12 | 3/4" - 14 | - | 32 | 29 | 63 | 104 |
| F45G1216SP | 20 | 3/4" | 12 | 1" - 11 | - | 38 | 31 | 65 | 105 |
| F45G1616SP | 25 | 1" | 16 | 1" - 11 | - | 38 | 41 | 90 | 145 |
| F45G1620P | 25 | 1" | 16 | 1.1/4" - 11 | - | 50 | 44 | 93 | 148 |
| F45G2020SP | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | 50 | 44 | 102 | 163 |
| F45G2024SP | 32 | 1.1/4" | 20 | 1.1/2" - 11 | - | 55 | 45 | 103 | 164 |
| F45G2424SP | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | 55 | 45 | 118 | 189 |
| F45G2432SP | 40 | 1.1/2" | 24 | 2" - 11 | - | 70 | 48 | 121 | 192 |
| F45G3232SP | 50 | 2" | 32 | 2" - 11 | - | 70 | 68 | 156 | 236 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

CURVA 90° GAS SV 60° COMPATTA

BSP compact female 90° swept elbow
 Femelle compacte 90° cone 60° BSP
 DKR 90° kompakt
 Tuerca giratoria 90° BSP compacta

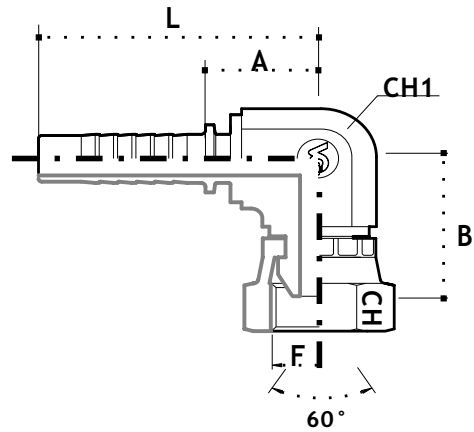


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|-----------------|----|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | CH ₁ | CH | B | A | L |
| F90G0404K | 6 | 1/4" | 04 | 1/4" - 19 | 14 | 19 | 25 | 19 | 47 |
| F90G0406K | 6 | 1/4" | 04 | 3/8" - 19 | 19 | 22 | 28 | 20.5 | 48.5 |
| F90G0506K | 8 | 5/16" | 05 | 3/8" - 19 | 19 | 22 | 28 | 20.5 | 48.5 |
| F90G0606K | 10 | 3/8" | 06 | 3/8" - 19 | 19 | 22 | 28 | 20.5 | 50.5 |
| F90G0608K | 10 | 3/8" | 06 | 1/2" - 14 | 22 | 27 | 34 | 23.5 | 53.5 |
| F90G0808K | 12 | 1/2" | 08 | 1/2" - 14 | 22 | 27 | 34 | 23.5 | 57 |
| F90G1212K | 20 | 3/4" | 12 | 3/4" - 14 | 27 | 32 | 39.5 | 25 | 64 |
| F90G1616K | 25 | 1" | 16 | 1" - 11 | 33 | 38 | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

MASCHIO GAS SEDE PIANA

BSP parallel flat seat male
 Mâle gaz face plate
 Flachdichtend BSP gewinde
 Macho gas asiento plano

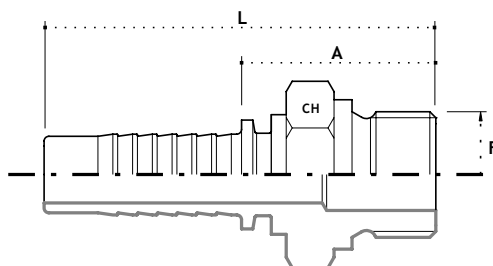


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MGSP0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | - | 19 | 27 | 55 |
| MGSP0406 | 6 | 1/4" | 04 | 3/8" - 19 | - | - | 22 | 29 | 57 |
| MGSP0506 | 8 | 5/16" | 05 | 3/8" - 19 | - | - | 22 | 29 | 57 |
| MGSP0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | - | 22 | 28.5 | 58.5 |
| MGSP0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | - | 27 | 32 | 62 |
| MGSP0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | - | 27 | 32 | 65 |
| MGSP0810 | 12 | 1/2" | 08 | 5/8" - 14 | - | - | 28 | 35 | 68 |
| MGSP0812 | 12 | 1/2" | 08 | 3/4" - 14 | - | - | 32 | 36 | 69 |
| MGSP1010 | 16 | 5/8" | 10 | 5/8" - 14 | - | - | 28 | 35 | 71 |
| MGSP1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | - | 32 | 36 | 72 |
| MGSP1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 32 | 37 | 78 |
| MGSP1216 | 20 | 3/4" | 12 | 1" - 11 | - | - | 38 | 40 | 80 |
| MGSP1616 | 25 | 1" | 16 | 1" - 11 | - | - | 38 | 39.5 | 94.5 |
| MGSP2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 50 | 46 | 106 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA GAS SEDE PIANA

BSP flat seat female
 Femelle BSP à face plate
 Flachdichtend BSP gewinde
 Hembra rosca gas asiento plano

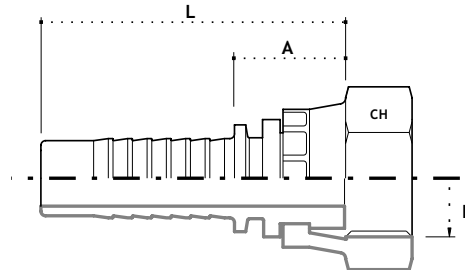

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDGSP0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | - | 19 | 14 | 42 |
| FDGSP0406 | 6 | 1/4" | 04 | 3/8" - 19 | - | - | 22 | 15 | 43 |
| FDGSP0506 | 8 | 5/16" | 05 | 3/8" - 19 | - | - | 22 | 15 | 43 |
| FDGSP0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | - | 22 | 16 | 46 |
| FDGSP0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | - | 27 | 17 | 47 |
| FDGSP0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | - | 27 | 17 | 50 |
| FDGSP0810 | 12 | 1/2" | 08 | 5/8" - 14 | - | - | 28 | 17 | 50 |
| FDGSP0812 | 12 | 1/2" | 08 | 3/4" - 14 | - | - | 32 | 19 | 52 |
| FDGSP1010 | 16 | 5/8" | 10 | 5/8" - 14 | - | - | 28 | 17 | 53 |
| FDGSP1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | - | 32 | 20 | 56 |
| FDGSP1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 32 | 21 | 62 |
| FDGSP1216 | 20 | 3/4" | 12 | 1" - 11 | - | - | 38 | 22 | 63 |
| FDGSP1616 | 25 | 1" | 16 | 1" - 11 | - | - | 38 | 23 | 78 |
| FDGSP2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 50 | 26 | 87 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

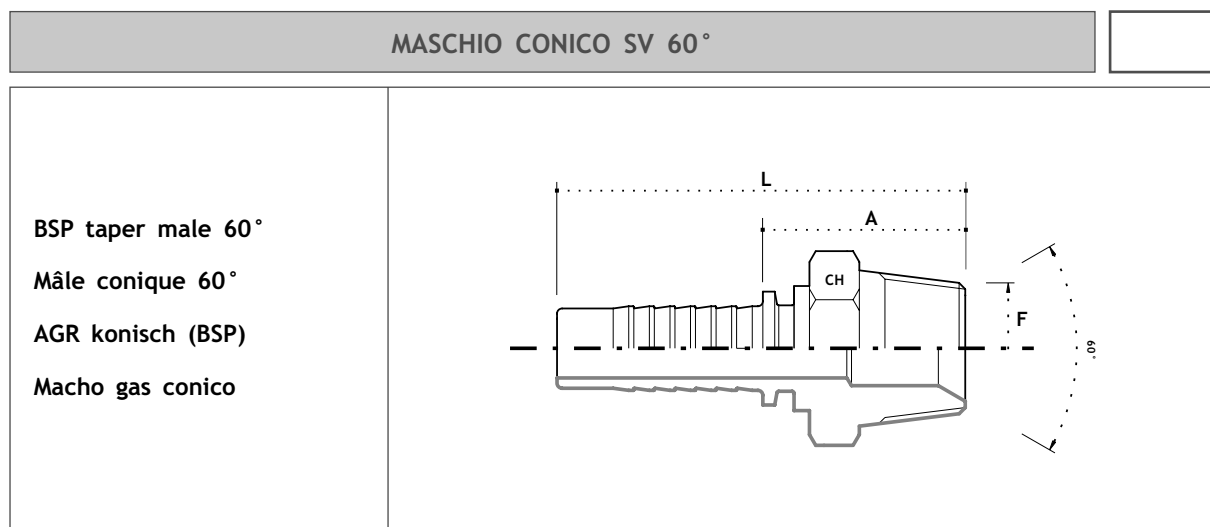

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MGK0302 | 5 | 3/16" | 03 | 1/8" - 28 | - | - | 12 | 22 | 47 |
| MGK0304 | 5 | 3/16" | 03 | 1/4" - 19 | - | - | 15 | 22 | 47 |
| MGK0402 | 6 | 1/4" | 04 | 1/8" - 28 | - | - | 12 | 22.5 | 50.5 |
| MGK0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | - | 15 | 27 | 55 |
| MGK0406 | 6 | 1/4" | 04 | 3/8" - 19 | - | - | 19 | 28 | 56 |
| MGK0504 | 8 | 5/16" | 05 | 1/4" - 19 | - | - | 15 | 27 | 55 |
| MGK0506 | 8 | 5/16" | 05 | 3/8" - 19 | - | - | 19 | 28 | 56 |
| MGK0604 | 10 | 3/8" | 06 | 1/4" - 19 | - | - | 15 | 28 | 56 |
| MGK0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | - | 19 | 28 | 61 |
| MGK0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | - | 22 | 34 | 67.5 |
| MGK0806 | 12 | 1/2" | 08 | 3/8" - 19 | - | - | 19 | 28 | 63 |
| MGK0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | - | 22 | 34.5 | 67.5 |
| MGK1008 | 16 | 5/8" | 10 | 1/2" - 14 | - | - | 22 | 34.5 | 70.5 |
| MGK1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | - | 27 | 36.5 | 72.5 |
| MGK1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 27 | 37 | 78 |
| MGK1216 | 20 | 3/4" | 12 | 1" - 11 | - | - | 36 | 45 | 86 |
| MGK1616 | 25 | 1" | 16 | 1" - 11 | - | - | 36 | 46 | 101 |
| MGK1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | - | 46 | 45.5 | 100 |
| MGK2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 46 | 46 | 106.3 |
| MGK2024 | 32 | 1.1/4" | 20 | 1.1/2" - 11 | - | - | 50 | 47 | 108 |
| MGK2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | - | 50 | 47.3 | 118 |
| MGK3232 | 50 | 2" | 32 | 2" - 11 | - | - | 65 | 57 | 137 |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

MASCHIO NPTF SV 60°

NPTF male 60°

Mâle NPTF 60°

AGN 60° innenkonus (NPTF)

Macho NPTF asiento 60°

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MNPT0302 | 5 | 3/16" | 03 | 1/8" - 27 | - | - | 12 | 22 | 47 |
| MNPT0304 | 5 | 3/16" | 03 | 1/4" - 18 | - | - | 15 | 22 | 47 |
| MNPT0402 | 6 | 1/4" | 04 | 1/8" - 27 | - | - | 12 | 22.5 | 50.5 |
| MNPT0404 | 6 | 1/4" | 04 | 1/4" - 18 | - | - | 15 | 27 | 55 |
| MNPT0406 | 6 | 1/4" | 04 | 3/8" - 18 | - | - | 19 | 28 | 56 |
| MNPT0504 | 8 | 5/16" | 05 | 1/4" - 18 | - | - | 15 | 27 | 55 |
| MNPT0506 | 8 | 5/16" | 05 | 3/8" - 18 | - | - | 19 | 28 | 56 |
| MNPT0508 | 8 | 5/16" | 05 | 1/2" - 14 | - | - | 22 | 28 | 56 |
| MNPT0604 | 10 | 3/8" | 06 | 1/4" - 18 | - | - | 15 | 28 | 56 |
| MNPT0606 | 10 | 3/8" | 06 | 3/8" - 18 | - | - | 19 | 28 | 58 |
| MNPT0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | - | 22 | 34 | 67.5 |
| MNPT0806 | 12 | 1/2" | 08 | 3/8" - 18 | - | - | 19 | 28 | 63 |
| MNPT0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | - | 22 | 34.5 | 67.5 |
| MNPT0812 | 12 | 1/2" | 08 | 3/4" - 14 | - | - | 27 | 34.5 | 67.5 |
| MNPT1008 | 16 | 5/8" | 10 | 1/2" - 14 | - | - | 22 | 34.5 | 70.5 |
| MNPT1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | - | 27 | 36.5 | 72.5 |
| MNPT1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 27 | 37 | 78 |
| MNPT1216 | 20 | 3/4" | 12 | 1" - 11.5 | - | - | 36 | 45 | 86 |
| MNPT1612 | 25 | 1" | 16 | 3/4" - 14 | - | - | 27 | 38 | 93 |
| MNPT1616 | 25 | 1" | 16 | 1" - 11.5 | - | - | 36 | 46 | 101 |
| MNPT1620 | 25 | 1" | 16 | 1.1/4" - 11.5 | - | - | 46 | 45.5 | 100 |
| MNPT2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11.5 | - | - | 46 | 45.5 | 106.5 |
| MNPT2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11.5 | - | - | 50 | 47 | 118 |
| MNPT3232 | 50 | 2" | 32 | 2" - 11.5 | - | - | 65 | 57 | 137 |

Raccordi a pressione - SERIE STANDARD


MASCHIO JIC SV 74°

JIC male 74°

Mâle JIC 74°

AGJ 74° aussenkonus
(UNF - gewinde)

Macho rosca UNF asiento JIC - 74°

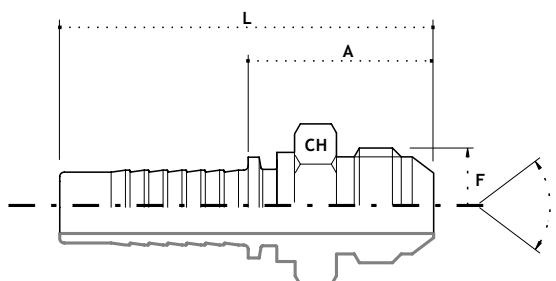

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MJ0304 | 5 | 3/16" | 03 | 7/16" - 20 | - | - | 12 | 27 | 51.5 |
| MJ0305 | 5 | 3/16" | 03 | 1/2" - 20 | - | - | 14 | 27 | 51.5 |
| MJ0404 | 6 | 1/4" | 04 | 7/16" - 20 | - | - | 12 | 27 | 55 |
| MJ0405 | 6 | 1/4" | 04 | 1/2" - 20 | - | - | 14 | 27 | 55 |
| MJ0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | - | 15 | 28 | 56 |
| MJ0505 | 8 | 5/16" | 05 | 1/2" - 20 | - | - | 14 | 27 | 55 |
| MJ0506 | 8 | 5/16" | 05 | 9/16" - 18 | - | - | 15 | 28 | 56 |
| MJ0507 | 8 | 5/16" | 05 | 5/8" - 18 | - | - | 17 | 29.5 | 57.5 |
| MJ0508 | 8 | 5/16" | 05 | 3/4" - 16 | - | - | 19 | 29.5 | 57.5 |
| MJ0606 | 10 | 3/8" | 06 | 9/16" - 18 | - | - | 15 | 28 | 58 |
| MJ0607 | 10 | 3/8" | 06 | 5/8" - 18 | - | - | 17 | 29.5 | 59.5 |
| MJ0608 | 10 | 3/8" | 06 | 3/4" - 16 | - | - | 19 | 30.5 | 60.5 |
| MJ0610 | 10 | 3/8" | 06 | 7/8" - 14 | - | - | 24 | 34.5 | 64.5 |
| MJ0808 | 12 | 1/2" | 08 | 3/4" - 16 | - | - | 19 | 31 | 64 |
| MJ0810 | 12 | 1/2" | 08 | 7/8" - 14 | - | - | 24 | 35 | 68 |
| MJ0812 | 12 | 1/2" | 08 | 1.1/16" - 12 | - | - | 27 | 39.5 | 72.5 |
| MJ1010 | 16 | 5/8" | 10 | 7/8" - 14 | - | - | 24 | 35 | 71 |
| MJ1012 | 16 | 5/8" | 10 | 1.1/16" - 12 | - | - | 27 | 39.5 | 75.5 |
| MJ1210 | 20 | 3/4" | 12 | 7/8" - 14 | - | - | - | - | - |
| MJ1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | - | 27 | 40.5 | 81.5 |
| MJ1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | - | 32 | 41.5 | 82.5 |
| MJ1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | - | 34 | 41.5 | 82.5 |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


MASCHIO JIC SV 74°

JIC male 74°

Mâle JIC 74°

AGJ 74° aussenkonus
(UNF - gewinde)

Macho rosca UNF asiento JIC - 74°

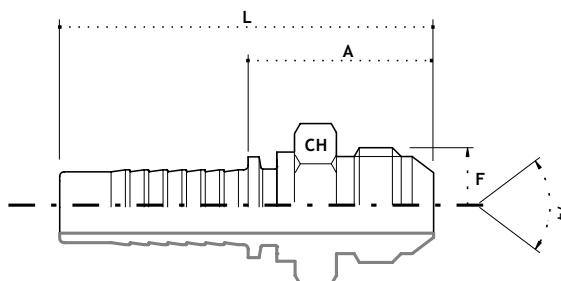

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|------|-------|--|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MJ1612 | 25 | 1" | 16 | 1.1/16" - 12 | - | - | - | - | |
| MJ1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | 34 | 42.5 | 97.5 | |
| MJ1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | 42 | 45 | 100 | |
| MJ2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | 42 | 45.5 | 106 | |
| MJ2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | 50 | 52.5 | 113 | |
| MJ2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | 50 | 52.5 | 123.5 | |
| MJ3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |

Raccordi a pressione - SERIE STANDARD


FEMMINA JIC SV 74°

JIC female 74° cone seat

Embout femelle JIC 74°

DKJ 74° dicht kopf
(UNF gewinde)

Hembra rosca UNF asiento
JIC - 74°

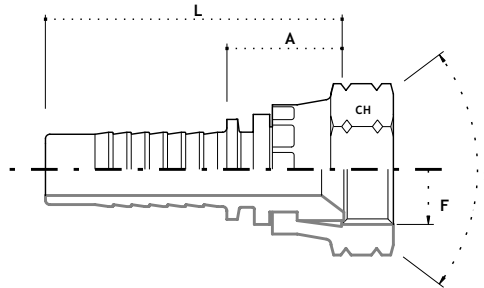

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDJ0304 | 5 | 3/16" | 03 | 7/16" - 20 | - | - | 15 | 15 | 40 |
| FDJ0305 | 5 | 3/16" | 03 | 1/2" - 20 | - | - | 17 | 15 | 40 |
| FDJ0404 | 6 | 1/4" | 04 | 7/16" - 20 | - | - | 15 | 15 | 43 |
| FDJ0405 | 6 | 1/4" | 04 | 1/2" - 20 | - | - | 17 | 16 | 44 |
| FDJ0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | - | 19 | 16 | 44 |
| FDJ0505 | 8 | 5/16" | 05 | 1/2" - 20 | - | - | 17 | 16 | 44 |
| FDJ0506 | 8 | 5/16" | 05 | 9/16" - 18 | - | - | 19 | 16 | 44 |
| FDJ0507 | 8 | 5/16" | 05 | 5/8" - 18 | - | - | 22 | 17 | 45 |
| FDJ0508 | 8 | 5/16" | 05 | 3/4" - 16 | - | - | 24 | 17 | 45 |
| FDJ0606 | 10 | 3/8" | 06 | 9/16" - 18 | - | - | 19 | 16.5 | 46.5 |
| FDJ0607 | 10 | 3/8" | 06 | 5/8" - 18 | - | - | 22 | 17 | 47 |
| FDJ0608 | 10 | 3/8" | 06 | 3/4" - 16 | - | - | 24 | 17 | 47 |
| FDJ0610 | 10 | 3/8" | 06 | 7/8" - 14 | - | - | 27 | 18.5 | 48.5 |
| FDJ0808 | 12 | 1/2" | 08 | 3/4" - 16 | - | - | 24 | 18 | 51 |
| FDJ0810 | 12 | 1/2" | 08 | 7/8" - 14 | - | - | 27 | 19 | 52 |
| FDJ0812 | 12 | 1/2" | 08 | 1.1/16" - 12 | - | - | 32 | 22 | 55 |
| FDJ1010 | 16 | 5/8" | 10 | 7/8" - 14 | - | - | 27 | 19.5 | 55.5 |
| FDJ1012 | 16 | 5/8" | 10 | 1.1/16" - 12 | - | - | 32 | 22.5 | 58.5 |
| FDJ1210 | 20 | 3/4" | 12 | 7/8" - 14 | - | - | - | - | - |
| FDJ1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | - | 32 | 23 | 64 |
| FDJ1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | - | 36 | 23 | 64 |
| FDJ1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | - | 41 | 23 | 64 |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA JIC SV 74°

JIC female 74° cone seat

Embout femelle JIC 74°

DKJ 74° dicht kopf
(UNF gewinde)

Hembra rosca UNF asiento
JIC - 74°

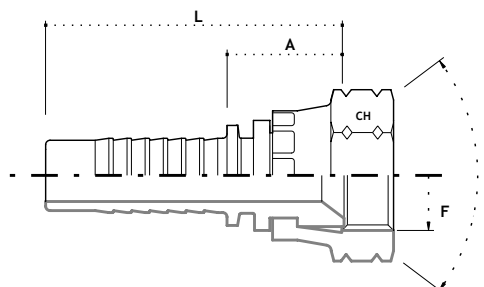

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDJ1612 | 25 | 1" | 16 | 1.1/16" - 12 | - | - | - | - | |
| FDJ1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | - | 41 | 24.5 | 79.5 |
| FDJ1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | - | 50 | 28.5 | 83.5 |
| FDJ2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | - | 50 | 29 | 90 |
| FDJ2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | - | 55 | 31 | 92 |
| FDJ2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | - | 55 | 31 | 102 |
| FDJ3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | 70 | 33 | 104 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° JIC SV 74°

90° JIC female swept elbow
74° cone seat

Femelle 90° JIC 74° filet UNF

DKJ 90° bogen 74° JIC
dicht kopf (UNF)

Hembra 90° rosca UNF
asiento JIC - 74°

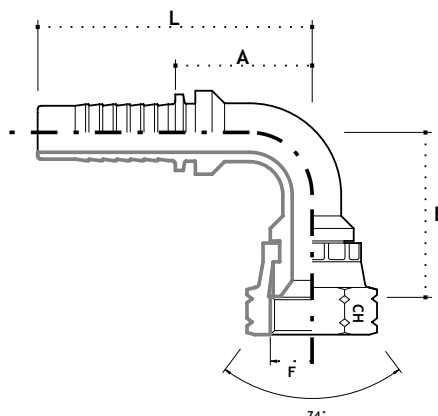

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90J0304 | 5 | 3/16" | 03 | 7/16" - 20 | - | 15 | 26 | 23 | 47.5 |
| F90J0305 | 5 | 3/16" | 03 | 1/2" - 20 | - | 17 | 27 | 23 | 47.5 |
| F90J0404 | 6 | 1/4" | 04 | 7/16" - 20 | - | 15 | 26 | 23 | 51 |
| F90J0405 | 6 | 1/4" | 04 | 1/2" - 20 | - | 17 | 27 | 23 | 51 |
| F90J0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | 19 | 27 | 23 | 51 |
| F90J0505 | 8 | 5/16" | 05 | 1/2" - 20 | - | 17 | 32 | 31.5 | 59.5 |
| F90J0506 | 8 | 5/16" | 05 | 9/16" - 18 | - | 19 | 32 | 31.5 | 59.5 |
| F90J0507 | 8 | 5/16" | 05 | 5/8" - 18 | - | 22 | 32.5 | 31.5 | 59.5 |
| F90J0508 | 8 | 5/16" | 05 | 3/4" - 16 | - | 24 | 32.5 | 31.5 | 59.5 |
| F90J0606 | 10 | 3/8" | 06 | 9/16" - 18 | - | 19 | 35 | 33 | 63 |
| F90J0607 | 10 | 3/8" | 06 | 5/8" - 18 | - | 22 | 35.5 | 33 | 63 |
| F90J0608 | 10 | 3/8" | 06 | 3/4" - 16 | - | 24 | 36.5 | 33 | 63 |
| F90J0610 | 10 | 3/8" | 06 | 7/8" - 14 | - | 27 | 39.5 | 33 | 63 |
| F90J0808 | 12 | 1/2" | 08 | 3/4" - 16 | - | 24 | 41 | 39 | 72 |
| F90J0810 | 12 | 1/2" | 08 | 7/8" - 14 | - | 27 | 42.5 | 39 | 72 |
| F90J0812 | 12 | 1/2" | 08 | 1.1/16" - 12 | - | 32 | 50 | 39 | 72 |
| F90J1010 | 16 | 5/8" | 10 | 7/8" - 14 | - | 27 | 50 | 49 | 85 |
| F90J1012 | 16 | 5/8" | 10 | 1.1/16" - 12 | - | 32 | 55 | 49 | 85 |
| F90J1210 | 20 | 3/4" | 12 | 7/8" - 14 | - | - | - | - | - |
| F90J1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | 32 | 58 | 53.5 | 94.5 |
| F90J1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 61 | 53.5 | 94.5 |
| F90J1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | 41 | 62.5 | 53.5 | 94.5 |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° JIC SV 74°

90° JIC female swept elbow
74° cone seat

Femelle 90° JIC 74°filet UNF

DKJ 90° bogen 74°JIC
dicht kopf (UNF)

Hembra 90° rosca UNF
asiento JIC - 74°

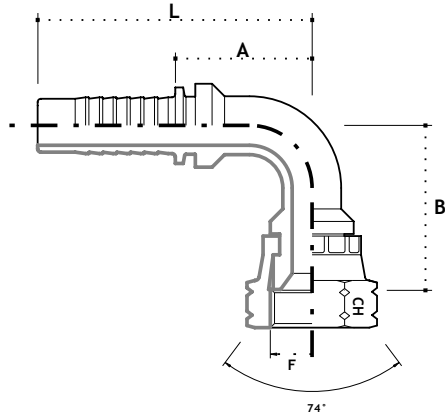

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-------|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90J1612 | 25 | 1" | 16 | 1.1/6" - 12 | - | - | - | - | - |
| F90J1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | 41 | 69.5 | 73 | 128 |
| F90J1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | 50 | 78.5 | 73 | 128 |
| F90J2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | 50 | 91.5 | 89 | 150 |
| F90J2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | 55 | 99 | 89 | 150 |
| F90J2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | 55 | 112.5 | 101 | 172 |
| F90J3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° JIC SV 74°

45° JIC female swept elbow
74° cone seat

Embout femelle 45° JIC 74°
filet UNF

DKJ 45° bogen 74° JIC
dicht kopf (UNF)

Hembra 45° rosca UNF
asiento JIC - 74°

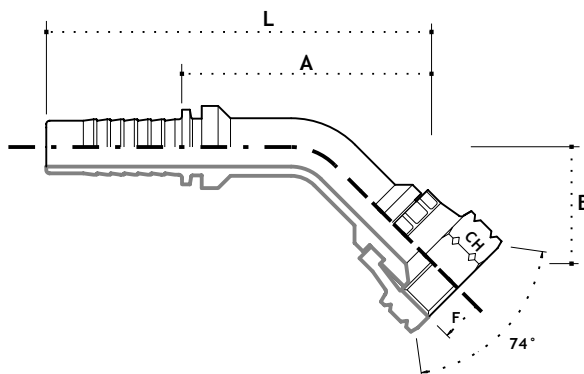

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45J0304 | 5 | 3/16" | 03 | 7/16" - 20 | - | 15 | 15 | 38 | 63 |
| F45J0305 | 5 | 3/16" | 03 | 1/2" - 20 | - | 17 | 17 | 40 | 65 |
| F45J0404 | 6 | 1/4" | 04 | 7/16" - 20 | - | 15 | 15 | 38 | 66 |
| F45J0405 | 6 | 1/4" | 04 | 1/2" - 20 | - | 17 | 17 | 40 | 68 |
| F45J0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | 19 | 16.5 | 39.5 | 67.5 |
| F45J0505 | 8 | 5/16" | 05 | 1/2" - 20 | - | 17 | 17 | 40 | 68 |
| F45J0506 | 8 | 5/16" | 05 | 9/16" - 18 | - | 19 | 18.5 | 49.5 | 77.5 |
| F45J0507 | 8 | 5/16" | 05 | 5/8" - 18 | - | 22 | 19 | 50 | 80 |
| F45J0508 | 8 | 5/16" | 05 | 3/4" - 16 | - | 24 | 19.5 | 50.5 | 78.5 |
| F45J0606 | 10 | 3/8" | 06 | 9/16" - 18 | - | 19 | 18 | 53 | 83 |
| F45J0607 | 10 | 3/8" | 06 | 5/8" - 18 | - | 22 | 19 | 54 | 84 |
| F45J0608 | 10 | 3/8" | 06 | 3/4" - 16 | - | 24 | 19 | 54 | 84 |
| F45J0610 | 10 | 3/8" | 06 | 7/8" - 14 | - | 27 | 21 | 56 | 86 |
| F45J0808 | 12 | 1/2" | 08 | 3/4" - 16 | - | 24 | 20 | 62 | 95 |
| F45J0810 | 12 | 1/2" | 08 | 7/8" - 14 | - | 27 | 21 | 63 | 97 |
| F45J0812 | 12 | 1/2" | 08 | 1.1/16" - 12 | - | 32 | 22 | 64 | 97 |
| F45J1010 | 16 | 5/8" | 10 | 7/8" - 14 | - | 27 | 22 | 60 | 96 |
| F45J1012 | 16 | 5/8" | 10 | 1.1/16" - 12 | - | 32 | 25 | 63 | 99 |
| F45J1210 | 20 | 3/4" | 12 | 7/8" - 14 | - | - | - | - | - |
| F45J1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | 32 | 29 | 62 | 103 |
| F45J1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 29 | 63 | 103 |
| F45J1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | 41 | 29 | 63 | 103 |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° JIC SV 74°

45° JIC female swept elbow
74° cone seat

Embout femelle 45° JIC 74°
filet UNF

DKJ 45° bogen 74° JIC
dicht kopf (UNF)

Hembra 45° rosca UNF
asiento JIC - 74°

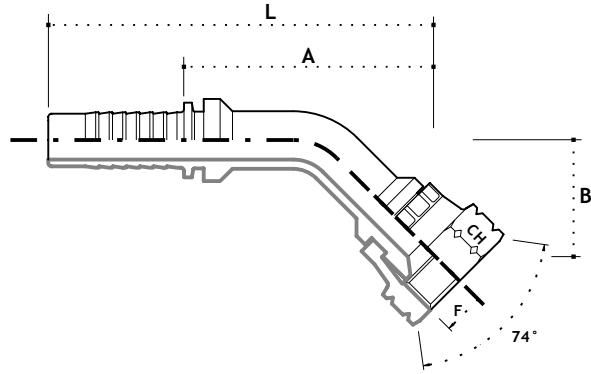

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | CH | B | A | L | |
| F45J1612 | 25 | 1" | 16 | 1.1/16" - 12 | - | - | - | - | |
| F45J1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | 41 | 39.5 | 88.5 | 143.5 |
| F45J1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | 50 | 38.5 | 89.5 | 147.5 |
| F45J2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | 50 | 44 | 101 | 162 |
| F45J2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | 55 | 45 | 103 | 164 |
| F45J2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | 55 | 45 | 118 | 189 |
| F45J3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA JIC SV 74° DADO SPINATO

JIC female 74° cone seat
with thrust wire nut

Embout femelle JIC 74°
écrou à jonc

DKJ 74° dicht kopf
(UNF gewinde)

Hembra rosca UNF asiento
JIC - 74°

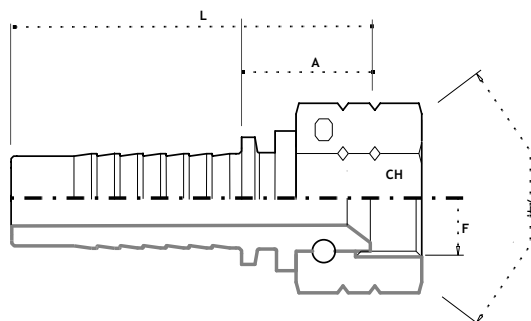

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDJ1012SP | 16 | 5/8" | 10 | 1.1/16" - 12 | - | - | 32 | 22.5 | 58.5 |
| FDJ1212SP | 20 | 3/4" | 12 | 1.1/16" - 12 | - | - | 32 | 23 | 64 |
| FDJ1216SP | 20 | 3/4" | 12 | 1.5/16" - 12 | - | - | 41 | 23.5 | 64.5 |
| FDJ1616SP | 25 | 1" | 16 | 1.5/16" - 12 | - | - | 41 | 24.5 | 79.5 |
| FDJ1620SP | 25 | 1" | 16 | 1.5/8" - 12 | - | - | 50 | 28.5 | 83.5 |
| FDJ2020SP | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | - | 50 | 29 | 89.5 |
| FDJ2024SP | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | - | 55 | 31 | 91.5 |
| FDJ2424SP | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | - | 55 | 31 | 102 |
| FDJ2432SP | 40 | 1.1/2" | 24 | 2.1/2" - 12 | - | - | 70 | 31.5 | 102.5 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° JIC SV 74° CON DADO SPINATO

90° JIC female swept elbow
74° cone seat with thrust
wirenut

Femelle 90° JIC 74° filet UNF
avec écrou à jonc

DKJ 90° bogen 74° JIC
dicht kopf (UNF)

Hembra 90° rosca UNF
asiento JIC - 74° con tuerca
sujetada con pierno

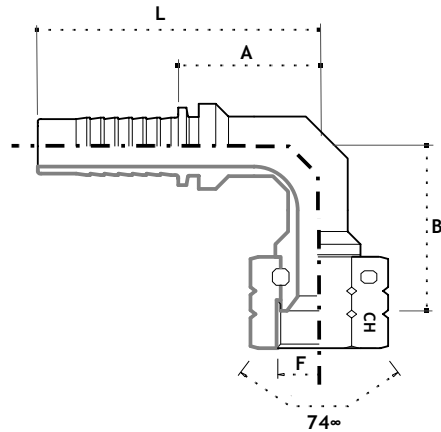

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90J1012SP | 16 | 5/8" | 10 | 1.1/16" - 12 | - | 32 | 55 | 49 | 85 |
| F90J1212SP | 20 | 3/4" | 12 | 1.1/16" - 12 | - | 32 | 58 | 53.5 | 94.5 |
| F90J1216SP | 20 | 3/4" | 12 | 1.5/16" - 12 | - | 41 | 62.5 | 53.5 | 94.5 |
| F90J1616SP | 25 | 1" | 16 | 1.5/16" - 12 | - | 41 | 69.5 | 73 | 128 |
| F90J1620SP | 25 | 1" | 16 | 1.5/8" - 12 | - | 50 | 78.5 | 73 | 128 |
| F90J2020SP | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | 50 | 91.5 | 89 | 150 |
| F90J2024SP | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | 55 | 99 | 89 | 150 |
| F90J2424SP | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | 55 | 112.5 | 101 | 172 |
| F90J2432SP | 40 | 1.1/2" | 24 | 2.1/2" - 12 | - | 70 | - | - | - |
| F90J3232SP | 50 | 2" | 32 | 2.1/2" - 12 | - | 70 | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressare - SERIE STANDARD


CURVA 45° JIC SV 74° CON DADO SPINATO

45° JIC female swept elbow
74° cone seat with thrust
wire nut

Embout femelle 45° JIC 74°
filet UNF avec ecrou à jonc

DKJ 45° bogen 74° JIC
dicht kopf (UNF)

Hembra 45° rosca UNF
asiento JIC - 74° con tuerca
sujetada con pierno

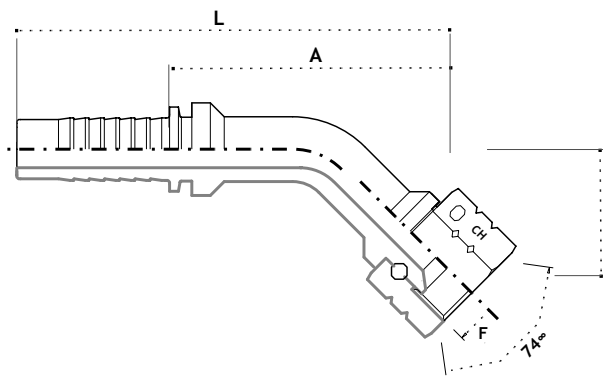

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45J1012SP | 16 | 5/8" | 10 | 1.1/16" - 12 | - | 32 | 25 | 63 | 99 |
| F45J1212SP | 20 | 3/4" | 12 | 1.1/16" - 12 | - | 32 | 29 | 62 | 103 |
| F45J1216SP | 20 | 3/4" | 12 | 1.5/16" - 12 | - | 41 | 29 | 63 | 103 |
| F45J1616SP | 25 | 1" | 16 | 1.5/16" - 12 | - | 41 | 39.5 | 88.5 | 143.5 |
| F45J1620SP | 25 | 1" | 16 | 1.5/8" - 12 | - | 50 | 38.5 | 89.5 | 147.5 |
| F45J2020SP | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | 50 | 44 | 101 | 162 |
| F45J2024SP | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | 55 | 45 | 103 | 164 |
| F45J2424SP | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | 55 | 45 | 118 | 189 |
| F45J2432SP | 40 | 1.1/2" | 24 | 2.1/2" - 12 | - | 70 | - | - | - |
| F45J3232SP | 50 | 2" | 32 | 2.1/2" - 12 | - | 70 | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA JIC SV 74° DOPPIO ESAGONO

JIC female 74° cone seat
Double exagon

Femelle SV JIC 74° double
hexagon

DKJ 74° konus mit konter
sechskant

Hembra rosca UNF asiento
JIC 74° doble hexàgono

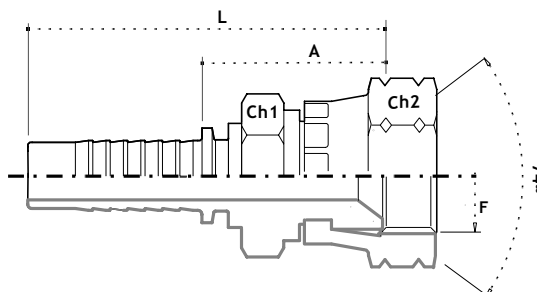

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-----------------|-----------------|------|
| | DN | Pollici Inches | Diam. Size | | | F | CH ₁ | CH ₂ | A |
| FDJ0404GIR | 6 | 1/4" | 04 | 7/16" - 20 | - | 14 | 15 | 23.5 | 51.5 |
| FDJ0405GIR | 6 | 1/4" | 04 | 1/2" - 20 | - | 14 | 17 | 24 | 52 |
| FDJ0406GIR | 6 | 1/4" | 04 | 9/16" - 18 | - | 17 | 19 | 25.7 | 53.7 |
| FDJ0506GIR | 8 | 5/16" | 05 | 9/16" - 18 | - | 17 | 19 | 25.2 | 53.2 |
| FDJ0606GIR | 10 | 3/8" | 06 | 9/16" - 18 | - | 17 | 19 | 25.2 | 55.2 |
| FDJ0608GIR | 10 | 3/8" | 06 | 3/4" - 16 | - | 19 | 24 | 27.3 | 57.3 |
| FDJ0808GIR | 12 | 1/2" | 08 | 3/4" - 16 | - | 22 | 24 | 27.8 | 60.8 |
| FDJ0810GIR | 12 | 1/2" | 08 | 7/8" - 14 | - | 22 | 27 | 29.5 | 62.5 |
| FDJ1010GIR | 16 | 5/8" | 10 | 7/8" - 14 | - | 24 | 27 | 29.5 | 65.5 |
| FDJ1012GIR | 16 | 5/8" | 10 | 1.1/16" - 12 | - | 27 | 32 | 32.5 | 68.5 |
| FDJ1212GIR | 20 | 3/4" | 12 | 1.1/16" - 12 | - | 27 | 32 | 35 | 76 |
| FDJ1616GIR | 25 | 1" | 16 | 1.5/16" - 12 | - | 32 | 41 | 36 | 91 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA METRICA "KOMATSU" SV 60°

"KOMATSU" metric female 60°

Femelle metrique "KOMATSU"
60°

DK "KOMATSU" 60° konus
metrisch

Hembra metrica "KOMATSU" 60°

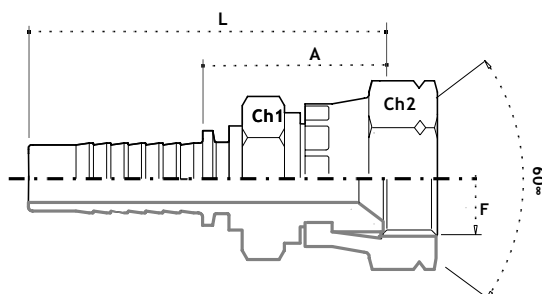


| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|-----------------|-----------------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH ₁ | CH ₂ | A | L |
| FDK0414 | 6 | 1/4" | - | M14 x 1.5 | - | 17 | 19 | 24.2 | 52.2 |
| FDK0516 | 8 | 5/16" | - | M16 x 1.5 | - | 19 | 22 | 24.2 | 52.2 |
| FDK0614 | 10 | 3/8" | - | M14 x 1.5 | - | 17 | 19 | 24.2 | 54.2 |
| FDK0616 | 10 | 3/8" | - | M16 x 1.5 | - | 19 | 22 | 24.2 | 54.2 |
| FDK0618 | 10 | 3/8" | - | M18 x 1.5 | - | 24 | 24 | 25.8 | 55.8 |
| FDK0820 | 12 | 1/2" | - | M20 x 1.5 | - | 27 | 27 | 29 | 62 |
| FDK0822 | 12 | 1/2" | - | M22 x 1.5 | - | 27 | 27 | 29 | 62 |
| FDK0824 | 12 | 1/2" | - | M24 x 1.5 | - | 32 | 32 | 32 | 65 |
| FDK1022 | 16 | 5/8" | - | M22 x 1.5 | - | 27 | 27 | 29 | 65 |
| FDK1024 | 16 | 5/8" | - | M24 x 1.5 | - | 32 | 32 | 32.5 | 68.5 |
| FDK1230 | 20 | 3/4" | - | M30 x 1.5 | - | 36 | 36 | 32.1 | 73.1 |
| FDK1633 | 25 | 1" | - | M33 x 1.5 | - | 41 | 41 | 34.6 | 89.6 |
| FDK2036 | 32 | 1.1/4" | - | M36 x 1.5 | - | 46 | 46 | 37.5 | 96.6 |
| FDK2442 | 40 | 1.1/2" | - | M42 x 1.5 | - | 50 | 50 | 36.1 | 107.1 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FEMMINA DIRITTA TOYOTA

TOYOTA BSP sraight female 60°
 TOYOTA femelle droite 60°
 DK "TOYOTA" 60° konus
 Hembra recta TOYOTA

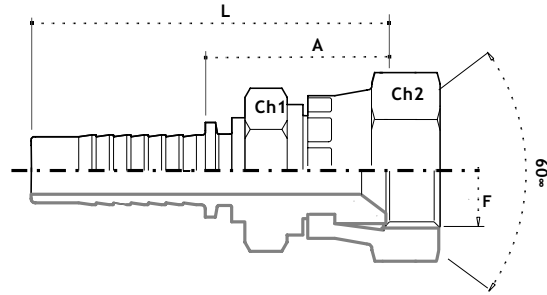


| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|-------------|-------------|----------------|------------|------------------|---|-----------------|-----------------|---|---|
| | DN | Pollici Inches | Diam. Size | F | | CH ₁ | CH ₂ | A | L |
| FDT0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | | | | |
| FDT0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | | | | |
| FDT0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | | | | |
| FDT1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | | | | |
| FDT1616 | 25 | 1" | 16 | 1" - 11 | - | | | | |
| FDT2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | | | | |
| FDT2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | | | | |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

MASCHIO METRICO SV 60°

Metric male 60°
 Mâle métrique évasé 60°
 AGM 60° innen konus
 Macho métrico cono 60°

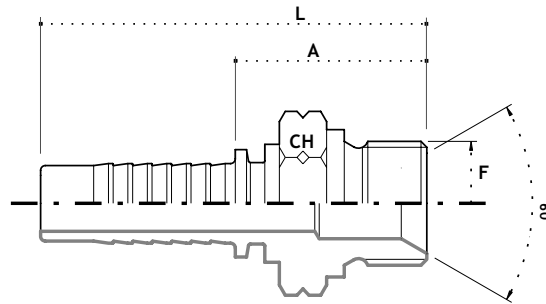


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MM0310 | 5 | 3/16" | 03 | M10 x 1 | - | - | 15 | 21 | 45 |
| MM0312 | 5 | 3/16" | 03 | M12 x 1.5 | - | - | 17 | 24.5 | 49 |
| MM0410 | 6 | 1/4" | 04 | M10 x 1 | - | - | 15 | 21 | 49 |
| MM0412 | 6 | 1/4" | 04 | M12 x 1.5 | - | - | 17 | 25.5 | 54 |
| MM0414 | 6 | 1/4" | 04 | M14 x 1.5 | - | - | 19 | 27 | 55 |
| MM0416 | 6 | 1/4" | 04 | M16 x 1.5 | - | - | 22 | 29 | 57 |
| MM0418 | 6 | 1/4" | 04 | M18 x 1.5 | - | - | 24 | 29 | 57 |
| MM0514 | 8 | 5/16" | 05 | M14 x 1.5 | - | - | 19 | 27 | 55 |
| MM0516 | 8 | 5/16" | 05 | M16 x 1.5 | - | - | 22 | 29 | 57 |
| MM0518 | 8 | 5/16" | 05 | M18 x 1.5 | - | - | 24 | 29 | 57 |
| MM0614 | 10 | 3/8" | 06 | M14 x 1.5 | - | - | 19 | 27 | 57 |
| MM0616 | 10 | 3/8" | 06 | M16 x 1.5 | - | - | 22 | 29 | 59 |
| MM0618 | 10 | 3/8" | 06 | M18 x 1.5 | - | - | 24 | 29 | 59 |
| MM0620 | 10 | 3/8" | 06 | M20 x 1.5 | - | - | 27 | 32 | 62 |
| MM0622 | 10 | 3/8" | 06 | M22 x 1.5 | - | - | 27 | 32 | 62 |
| MM0818 | 12 | 1/2" | 08 | M18 x 1.5 | - | - | 24 | 29 | 62 |
| MM0820 | 12 | 1/2" | 08 | M20 x 1.5 | - | - | 27 | 33 | 66 |
| MM0822 | 12 | 1/2" | 08 | M22 x 1.5 | - | - | 27 | 33 | 66 |
| MM0824 | 12 | 1/2" | 08 | M24 x 1.5 | - | - | 30 | 36 | 69 |
| MM0826 | 12 | 1/2" | 08 | M26 x 1.5 | - | - | 32 | 36 | 69 |
| MM1026 | 16 | 5/8" | 10 | M26 x 1.5 | - | - | 32 | 36 | 72 |
| MM1226 | 20 | 3/4" | 12 | M26 x 1.5 | - | - | 32 | 37 | 78 |
| MM1230 | 20 | 3/4" | 12 | M30 x 1.5 | - | - | 34 | 36 | 77 |

Raccordi a pressione - SERIE STANDARD

MASCHIO METRICO SV 60°

Metric male 60°
Mâle métrique évasé 60°
AGM 60° innen konus
Macho métrico cono 60°

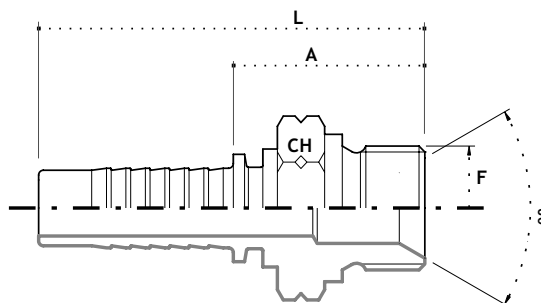


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MM1638 | 25 | 1" | 16 | M38 x 1.5 | - | - | 46 | 37 | 92 |
| MM2045 | 32 | 1.1/4" | 20 | M45 x 1.5 | - | - | - | - | - |
| MM2452 | 40 | 1.1/2" | 24 | M52 x 1.5 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FEMMINA METRICA SV 60°

Metric female SV 60°
Femelle droite 60°
DKM 60° konus
Hembra rosca metrica asiento 60°

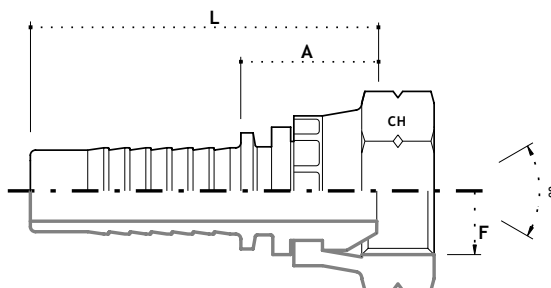


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDM0310 | 5 | 3/16" | 03 | M10 x 1 | - | - | 15 | 18 | 43 |
| FDM0312 | 5 | 3/16" | 03 | M12 x 1.5 | - | - | 17 | 18 | 43 |
| FDM0410 | 6 | 1/4" | 04 | M10 x 1 | - | - | 15 | 18 | 46 |
| FDM0412 | 6 | 1/4" | 04 | M12 x 1.5 | - | - | 17 | 18 | 46 |
| FDM0414 | 6 | 1/4" | 04 | M14 x 1.5 | - | - | 19 | 18 | 46 |
| FDM0416 | 6 | 1/4" | 04 | M16 x 1.5 | - | - | 22 | 19 | 47 |
| FDM0418 | 6 | 1/4" | 04 | M18 x 1.5 | - | - | 24 | 19 | 47 |
| FDM0514 | 8 | 5/16" | 05 | M14 x 1.5 | - | - | 19 | 18 | 46 |
| FDM0516 | 8 | 5/16" | 05 | M16 x 1.5 | - | - | 22 | 19 | 47 |
| FDM0518 | 8 | 5/16" | 05 | M18 x 1.5 | - | - | 24 | 19 | 47 |
| FDM0614 | 10 | 3/8" | 06 | M14 x 1.5 | - | - | 19 | 19 | 49 |
| FDM0616 | 10 | 3/8" | 06 | M16 x 1.5 | - | - | 22 | 20 | 50 |
| FDM0618 | 10 | 3/8" | 06 | M18 x 1.5 | - | - | 24 | 20 | 50 |
| FDM0620 | 10 | 3/8" | 06 | M20 x 1.5 | - | - | 27 | 21 | 51 |
| FDM0622 | 10 | 3/8" | 06 | M22 x 1.5 | - | - | 27 | 21 | 51 |
| FDM0818 | 12 | 1/2" | 08 | M18 x 1.5 | - | - | 24 | 20 | 53 |
| FDM0820 | 12 | 1/2" | 08 | M20 x 1.5 | - | - | 27 | 22 | 55 |
| FDM0822 | 12 | 1/2" | 08 | M22 x 1.5 | - | - | 27 | 22 | 55 |
| FDM0824 | 12 | 1/2" | 08 | M24 x 1.5 | - | - | 30 | 23 | 56 |
| FDM0826 | 12 | 1/2" | 08 | M26 x 1.5 | - | - | 32 | 24 | 57 |
| FDM1026 | 16 | 5/8" | 10 | M26 x 1.5 | - | - | 32 | 24 | 60 |
| FDM1226 | 20 | 3/4" | 12 | M26 x 1.5 | - | - | 32 | 25 | 66 |
| FDM1230 | 20 | 3/4" | 12 | M30 x 1.5 | - | - | 34 | 26 | 67 |

Raccordi a pressione - SERIE STANDARD

FEMMINA METRICA SV 60°

Metric female SV 60°
Femelle droite 60°
DKM 60° konus
Hembra rosca metrica asiento 60°

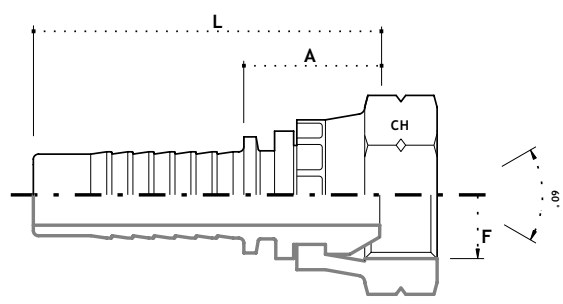

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|----|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FDM1638 | 25 | 1" | 16 | M38 x 1.5 | - | - | 46 | 37 | 92 |
| FDM2045 | 32 | 1.1/4" | 20 | M45 x 1.5 | - | - | - | - | - |
| FDM2452 | 40 | 1.1/2" | 24 | M52 x 1.5 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° METRICO SV 60°

Metric female 90° swept
elbow

Embout femelle 90° cône 60°

DKM 90° bogen 60° konus

Hembra 90° rosca metrica
asiento 60°

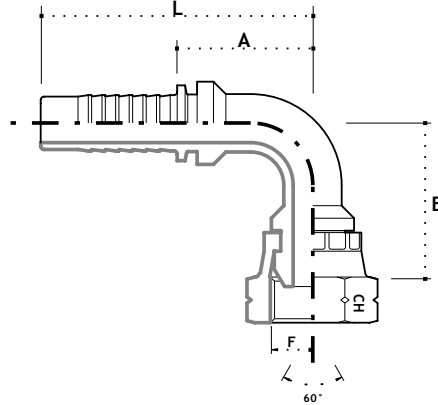

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90M0310 | 5 | 3/16" | 03 | M10 x 1 | - | 15 | 29 | 23 | 47.5 |
| F90M0312 | 5 | 3/16" | 03 | M12 x 1.5 | - | 17 | 29 | 23 | 47.5 |
| F90M0410 | 6 | 1/4" | 04 | M10 x 1 | - | 15 | 29 | 23 | 51 |
| F90M0412 | 6 | 1/4" | 04 | M12 x 1.5 | - | 17 | 29 | 23 | 51 |
| F90M0414 | 6 | 1/4" | 04 | M14 x 1.5 | - | 19 | 29 | 23 | 51 |
| F90M0416 | 6 | 1/4" | 04 | M16 x 1.5 | - | 22 | 32 | 23 | 51 |
| F90M0418 | 6 | 1/4" | 04 | M18 x 1.5 | - | 24 | 32 | 23 | 51 |
| F90M0514 | 8 | 5/16" | 05 | M14 x 1.5 | - | 19 | 33.5 | 31.5 | 59.5 |
| F90M0516 | 8 | 5/16" | 05 | M16 x 1.5 | - | 22 | 35.5 | 31.5 | 59.5 |
| F90M0518 | 8 | 5/16" | 05 | M18 x 1.5 | - | 24 | 35.5 | 31.5 | 59.5 |
| F90M0614 | 10 | 3/8" | 06 | M14 x 1.5 | - | 19 | 37 | 33 | 63 |
| F90M0616 | 10 | 3/8" | 06 | M16 x 1.5 | - | 22 | 38 | 33 | 63 |
| F90M0618 | 10 | 3/8" | 06 | M18 x 1.5 | - | 24 | 38 | 33 | 63 |
| F90M0620 | 10 | 3/8" | 06 | M20 x 1.5 | - | 27 | 42 | 33 | 63 |
| F90M0622 | 10 | 3/8" | 06 | M22 x 1.5 | - | 27 | 42 | 33 | 63 |
| F90M0818 | 12 | 1/2" | 08 | M18 x 1.5 | - | 24 | 43 | 39 | 72 |
| F90M0820 | 12 | 1/2" | 08 | M20 x 1.5 | - | 27 | 45 | 39 | 72 |
| F90M0822 | 12 | 1/2" | 08 | M22 x 1.5 | - | 27 | 45 | 39 | 72 |
| F90M0824 | 12 | 1/2" | 08 | M24 x 1.5 | - | 30 | 47 | 39 | 72 |
| F90M0826 | 12 | 1/2" | 08 | M26 x 1.5 | - | 32 | 51 | 39 | 72 |
| F90M1026 | 16 | 1/2" | 10 | M26 x 1.5 | - | 32 | 56 | 49 | 85 |
| F90M1226 | 20 | 5/8" | 12 | M26 x 1.5 | - | 32 | 59 | 53.5 | 94.5 |
| F90M1230 | 20 | 5/8" | 12 | M30 x 1.5 | - | 34 | 63 | 53.5 | 94.5 |

Raccordi a pressione - SERIE STANDARD


CURVA 90° METRICO SV 60°

Metric female 90° swept elbow

Embout femelle 90° cône 60°

DKM 90° bogen 60° konus

Hembra 90° rosca metrica asiento 60°

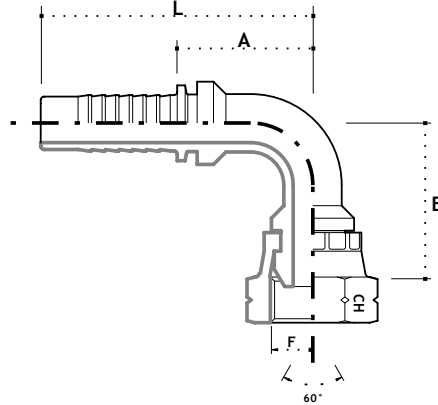

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90M1638 | 25 | 1" | 16 | M38 x 1.5 | - | 46 | 72 | 73 | 128 |
| F90M2045 | 32 | 1.1/4" | 20 | M45 x 1.5 | - | - | - | - | - |
| F90M2452 | 40 | 1.1/2" | 24 | M52 x 1.5 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° METRICA SV 60

Metric female 45° swept
elbow

Embout femelle 45°
cône 60°

DKM 45° bogen, konus 60°

Hembra 45° rosca metrica
asiento 60°

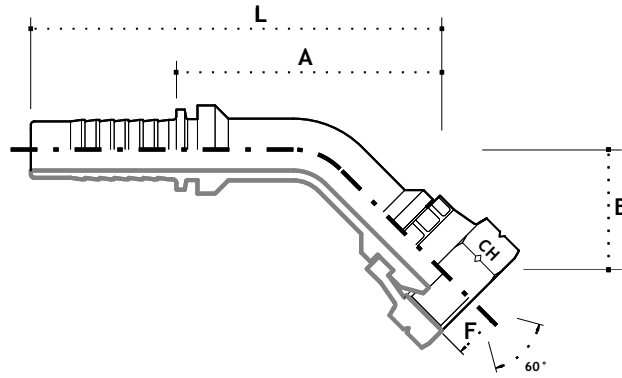

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45M0310 | 5 | 3/16" | 03 | M10 x 1 | - | 15 | 17 | 40 | 65 |
| F45M0312 | 5 | 3/16" | 03 | M12 x 1.5 | - | 17 | 17 | 40 | 65 |
| F45M0410 | 6 | 1/4" | 04 | M10 x 1 | - | 15 | 17 | 40 | 68 |
| F45M0412 | 6 | 1/4" | 04 | M12 x 1.5 | - | 17 | 17 | 40 | 68 |
| F45M0414 | 6 | 1/4" | 04 | M14 x 1.5 | - | 19 | 17 | 40 | 68 |
| F45M0416 | 6 | 1/4" | 04 | M16 x 1.5 | - | 22 | 20 | 43 | 71 |
| F45M0418 | 6 | 1/4" | 04 | M18 x 1.5 | - | 24 | 20 | 43 | 71 |
| F45M0514 | 8 | 5/16" | 05 | M14 x 1.5 | - | 19 | 17 | 40 | 68 |
| F45M0516 | 8 | 5/16" | 05 | M16 x 1.5 | - | 22 | 20 | 43 | 71 |
| F45M0518 | 8 | 5/16" | 05 | M18 x 1.5 | - | 24 | 20 | 43 | 71 |
| F45M0614 | 10 | 3/8" | 06 | M14 x 1.5 | - | 19 | 20 | 55 | 85 |
| F45M0616 | 10 | 3/8" | 06 | M16 x 1.5 | - | 22 | 20 | 55 | 85 |
| F45M0618 | 10 | 3/8" | 06 | M18 x 1.5 | - | 24 | 20 | 55 | 85 |
| F45M0620 | 10 | 3/8" | 06 | M20 x 1.5 | - | 27 | 23 | 58 | 88 |
| F45M0622 | 10 | 3/8" | 06 | M22 x 1.5 | - | 27 | 23 | 58 | 88 |
| F45M0818 | 12 | 1/2" | 08 | M18 x 1.5 | - | 24 | 23 | 65 | 98 |
| F45M0820 | 12 | 1/2" | 08 | M20 x 1.5 | - | 27 | 23 | 65 | 98 |
| F45M0822 | 12 | 1/2" | 08 | M22 x 1.5 | - | 27 | 23 | 65 | 98 |
| F45M0824 | 12 | 1/2" | 08 | M24 x 1.5 | - | 30 | 21 | 66 | 99 |
| F45M0826 | 12 | 1/2" | 08 | M26 x 1.5 | - | 32 | 21 | 66 | 99 |
| F45M1026 | 16 | 5/8" | 10 | M26 x 1.5 | - | 32 | 26 | 64 | 100 |
| F45M1226 | 20 | 3/4" | 12 | M26 x 1.5 | - | 32 | 29 | 63 | 104 |
| F45M1230 | 20 | 3/4" | 12 | M30 x 1.5 | - | 34 | 31 | 65 | 105 |

Raccordi a pressione - SERIE STANDARD


CURVA 45° METRICA SV 60

Metric female 45° swept
elbow

Embout femelle 45°
cône 60°

DKM 45° bogen, konus 60°

Hembra 45° rosca metrica
asiento 60°

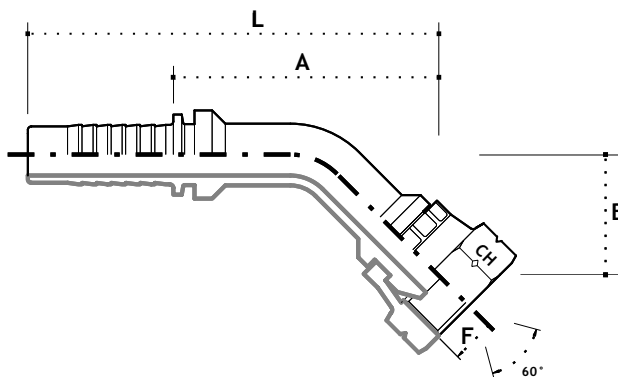

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|----|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45M1638 | 25 | 1" | 16 | M38 x 1.5 | - | 46 | 41 | 90 | 145 |
| F45M2045 | 32 | 1.1/4" | 20 | M45 x 1.5 | - | - | - | - | - |
| F45M2452 | 40 | 1.1/2" | 24 | M52 x 1.5 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


MASCHIO METRICO 24° DKOL

Metric male 24° cone l.t.

Mâle métrique 24 série L

CEL DOK-L metrisch

Macho rosca metrica asiento
24° serie L

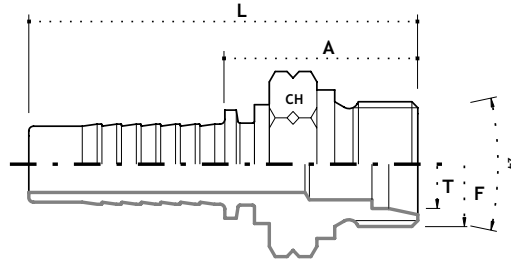

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | - | CH | A | L |
| ME0312L6 | 5 | 3/16" | 03 | M12 x 1.5 | 6 | - | 15 | 22.5 | 50 |
| ME0314L8 | 5 | 3/16" | 03 | M14 x 1.5 | 8 | - | 15 | 23 | 51 |
| ME0412L6 | 6 | 1/4" | 04 | M12 x 1.5 | 6 | - | 15 | 23 | 51 |
| ME0414L8 | 6 | 1/4" | 04 | M14 x 1.5 | 8 | - | 15 | 23 | 51 |
| ME0416L10 | 6 | 1/4" | 04 | M16 x 1.5 | 10 | - | 17 | 25 | 53 |
| ME0418L12 | 6 | 1/4" | 04 | M18 x 1.5 | 12 | - | 19 | 26 | 54 |
| ME0516L10 | 8 | 5/16" | 05 | M16 x 1.5 | 10 | - | 17 | 25 | 53 |
| ME0518L12 | 8 | 5/16" | 05 | M18 x 1.5 | 12 | - | 19 | 26 | 54 |
| ME0616L10 | 10 | 3/8" | 06 | M16 x 1.5 | 10 | - | 17 | 25 | 55 |
| ME0618L12 | 10 | 3/8" | 06 | M18 x 1.5 | 12 | - | 19 | 25 | 55.5 |
| ME0622L15 | 10 | 3/8" | 06 | M22 x 1.5 | 15 | - | 24 | 27 | 57 |
| ME0822L15 | 12 | 1/2" | 08 | M22 x 1.5 | 15 | - | 24 | 27.5 | 60.5 |
| ME0826L18 | 12 | 1/2" | 08 | M26 x 1.5 | 18 | - | 27 | 27.5 | 60.5 |
| ME1026L18 | 16 | 5/8" | 10 | M26 x 1.5 | 18 | - | 27 | 27.5 | 63.5 |
| ME1030L22 | 16 | 5/8" | 10 | M30 x 2 | 22 | - | 32 | 31.5 | 67 |
| ME1226L18 | 20 | 3/4" | 12 | M26 x 1.5 | 18 | - | 27 | 29 | 68.5 |
| ME1230L22 | 20 | 3/4" | 12 | M30 x 2 | 22 | - | 32 | 32 | 73 |
| ME1636L28 | 25 | 1" | 16 | M36 x 2 | 28 | - | 38 | 40 | 92.5 |
| ME2045L35 | 32 | 1.1/4" | 20 | M45 x 2 | 35 | - | 46 | 41.5 | 101.5 |
| ME2452L42 | 40 | 1.1/2" | 24 | M52 x 2 | 42 | - | 55 | 40 | 107 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA METRICA O-RING 24° DKOL

O-Ring metric female 24°
cone l.t.

Femelle droite cone 24°
O-Ring

DKO-L innengew mit O-Ring

Hembra rosca metrica asiento
24° O-Ring serie L

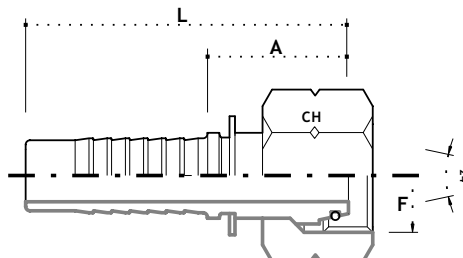

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | - | CH | A | L |
| FE0312L6 | 5 | 3/16" | 03 | M12 x 1.5 | 6 | - | 14 | 25.5 | 50 |
| FE0314L8 | 5 | 3/16" | 03 | M14 x 1.5 | 8 | - | 17 | 25.5 | 50 |
| *FE0412L6 | 6 | 1/4" | 04 | M12 x 1.5 | 6 | - | 14 | 21 | 48.5 |
| FE0414L8 | 6 | 1/4" | 04 | M14 x 1.5 | 8 | - | 17 | 23.5 | 53 |
| FE0416L10 | 6 | 1/4" | 04 | M16 x 1.5 | 10 | - | 19 | 26 | 54 |
| FE0418L12 | 6 | 1/4" | 04 | M18 x 1.5 | 12 | - | 22 | 26 | 54 |
| FE0516L10 | 8 | 5/16" | 05 | M16 x 1.5 | 10 | - | 19 | 26 | 54 |
| FE0518L12 | 8 | 5/16" | 05 | M18 x 1.5 | 12 | - | 22 | 26 | 54 |
| *FE0616L10 | 10 | 3/8" | 06 | M16 x 1.5 | 10 | - | 19 | 23.5 | 53.5 |
| FE0618L12 | 10 | 3/8" | 06 | M18 x 1.5 | 12 | - | 22 | 26.5 | 56.5 |
| FE0622L15 | 10 | 3/8" | 06 | M22 x 1.5 | 15 | - | 27 | 27 | 57 |
| FE0822L15 | 12 | 1/2" | 08 | M22 x 1.5 | 15 | - | 27 | 27.5 | 60.5 |
| FE0826L18 | 12 | 1/2" | 08 | M26 x 1.5 | 18 | - | 32 | 28 | 61 |
| FE1026L18 | 16 | 5/8" | 10 | M26 x 1.5 | 18 | - | 32 | 30 | 64 |
| FE1030L22 | 16 | 5/8" | 10 | M30 x 2 | 22 | - | 36 | 31 | 66.5 |
| FE1226L18 | 20 | 3/4" | 12 | M26 x 1.5 | 18 | - | - | - | - |
| FE1230L22 | 20 | 3/4" | 12 | M30 x 2 | 22 | - | 36 | 31 | 72 |
| FE1636L28 | 25 | 1" | 16 | M36 x 2 | 28 | - | 41 | 33.5 | 88.5 |
| FE2045L35 | 32 | 1.1/4" | 20 | M45 x 2 | 35 | - | 50 | 38.5 | 99 |
| FE2452L42 | 40 | 1.1/2" | 24 | M52 x 2 | 42 | - | 60 | 39 | 109.5 |
| - | - | - | - | - | - | - | - | - | - |
| *DADOPINZATO | - | - | - | - | - | - | - | - | - |
| CRINPEDNUT | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° METRICA O-RING 24° DKOL

90° O-Ring metric swept
elbow 24° cone l.t.

Embout femelle 90°
cône 24° O-Ring série L

DKO-L 90° bogen reihe L

Hembra 90° rosca metrica
asiento 24° O-Ring serie L

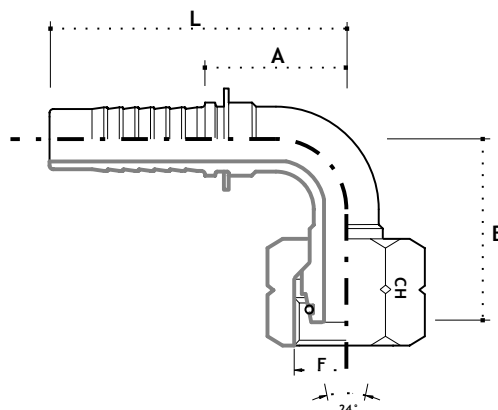

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90E0312L6 | 5 | 3/16" | 03 | M12 x 1.5 | 6 | 14 | 31.5 | 29.5 | 53.5 |
| F90E0314L8 | 5 | 3/16" | 03 | M14 x 1.5 | 8 | 17 | 31.5 | 29.5 | 53.5 |
| *F90E0412L6 | 6 | 1/4" | 04 | M12 x 1.5 | 6 | 14 | 31.5 | 29.5 | 57 |
| F90E0414L8 | 6 | 1/4" | 04 | M14 x 1.5 | 8 | 17 | 31.5 | 29.5 | 57 |
| F90E0416L10 | 6 | 1/4" | 04 | M16 x 1.5 | 10 | 19 | 32.5 | 29 | 56.5 |
| F90E0418L12 | 6 | 1/4" | 04 | M18 x 1.5 | 12 | 22 | 30.5 | 27 | 55 |
| F90E0516L10 | 8 | 5/16" | 05 | M16 x 1.5 | 10 | 19 | 32.5 | 31 | 59 |
| F90E0518L12 | 8 | 5/16" | 05 | M18 x 1.5 | 12 | 22 | 37 | 29 | 57 |
| *F90E0616L10 | 10 | 3/8" | 06 | M16 x 1.5 | 10 | 19 | 38 | 33 | 63 |
| F90E0618L12 | 10 | 3/8" | 06 | M18 x 1.5 | 12 | 22 | 37.5 | 35.5 | 65 |
| F90E0622L15 | 10 | 3/8" | 06 | M22 x 1.5 | 15 | 27 | 42 | 34 | 64 |
| F90E0822L15 | 12 | 1/2" | 08 | M22 x 1.5 | 15 | 27 | 44 | 39.5 | 72 |
| F90E0826L18 | 12 | 1/2" | 08 | M26 x 1.5 | 18 | 32 | 46.5 | 39.5 | 72 |
| F90E1026L18 | 16 | 5/8" | 10 | M26 x 1.5 | 18 | 32 | 50.5 | 48.5 | 84 |
| F90E1030L22 | 16 | 5/8" | 10 | M30 x 2 | 22 | 36 | 53 | 48.5 | 84 |
| F90E1226L18 | 20 | 3/4" | 12 | M26 x 1.5 | 18 | - | - | - | - |
| F90E1230L22 | 20 | 3/4" | 12 | M30 x 2 | 22 | 36 | 55.5 | 56.5 | 97 |
| F90E1636L28 | 25 | 1" | 16 | M36 x 2 | 28 | 41 | 72.5 | 73 | 127 |
| F90E2045L35 | 32 | 1.1/4" | 20 | M45 x 2 | 35 | 50 | 86.5 | 92 | 152 |
| F90E2452L42 | 40 | 1.1/2" | 24 | M52 x 2 | 42 | 60 | 94 | 99 | 170 |
| - | - | - | - | - | - | - | - | - | - |
| *DADOPINZATO | - | - | - | - | - | - | - | - | - |
| CRINPEDNUT | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° METRICA O-RING 24° DKOL-45°

45° O-Ring metric swept
elbow 24° cone l.t.

Embout femelle 45° cône 24°
O-Ring. série L

DKO-L 45° bogen reihe L

Hembra 45° rosca metrica
asiento 24° O-Ring serie L

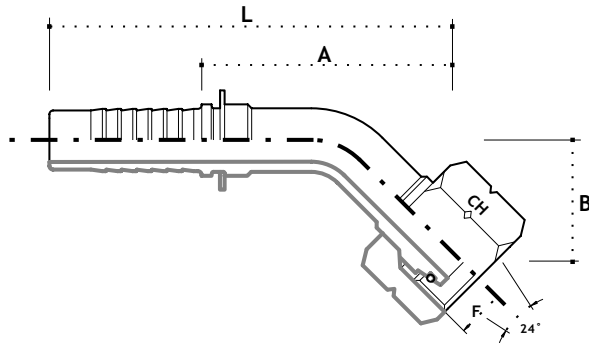

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|------|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45E0312L6 | 5 | 3/16" | 03 | M12 x 1.5 | 6 | 14 | 15 | 37 | 65 |
| F45E0314L8 | 5 | 3/16" | 03 | M14 x 1.5 | 8 | 17 | 15 | 37 | 65 |
| *F45E0412L6 | 6 | 1/4" | 04 | M12 x 1.5 | 6 | 14 | 17 | 40 | 68 |
| F45E0414L8 | 6 | 1/4" | 04 | M14 x 1.5 | 8 | 17 | 17 | 50 | 78 |
| F45E0416L10 | 6 | 1/4" | 04 | M16 x 1.5 | 10 | 19 | 17 | 48.5 | 76 |
| F45E0418L12 | 6 | 1/4" | 04 | M18 x 1.5 | 12 | 22 | 17 | 48.5 | 76 |
| F45E0516L10 | 8 | 5/16" | 05 | M16 x 1.5 | 10 | 19 | 17 | 52.5 | 80 |
| F45E0518L12 | 8 | 5/16" | 05 | M18 x 1.5 | 12 | 22 | 20 | 50 | 78 |
| *F45E0616L10 | 10 | 3/8" | 06 | M16 x 1.5 | 10 | 19 | 20 | 55 | 85 |
| F45E0618L12 | 10 | 3/8" | 06 | M18 x 1.5 | 12 | 22 | 17 | 57 | 86.5 |
| F45E0622L15 | 10 | 3/8" | 06 | M22 x 1.5 | 15 | 27 | 19 | 59 | 88.5 |
| F45E0822L15 | 12 | 1/2" | 08 | M22 x 1.5 | 15 | 27 | 22 | 64 | 97 |
| F45E0826L18 | 12 | 1/2" | 08 | M26 x 1.5 | 18 | 32 | 26 | 65 | 98 |
| F45E1026L18 | 16 | 5/8" | 10 | M26 x 1.5 | 18 | 32 | 28 | 61.5 | 97 |
| F45E1030L22 | 16 | 5/8" | 10 | M30 x 2 | 22 | 36 | 30 | 63.5 | 99 |
| F45E1226L18 | 20 | 3/4" | 12 | M26 x 1.5 | - | - | - | - | - |
| F45E1230L22 | 20 | 3/4" | 12 | M30 x 2 | 22 | 36 | 27 | 63 | 103.5 |
| F45E1636L28 | 25 | 1" | 16 | M36 x 2 | 28 | 41 | 38.5 | 85.5 | 140 |
| F45E2045L35 | 32 | 1.1/4" | 20 | M45 x 2 | 35 | 50 | 35 | 104.5 | 164.5 |
| F45E2452L42 | 40 | 1.1/2" | 24 | M52 x 2 | 42 | 60 | 45 | 119 | 189 |
| - | - | - | - | - | - | - | - | - | - |
| *DADOPINZATO | - | - | - | - | - | - | - | - | - |
| CRINPEDNUT | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


MASCHIO METRICO 24° DKOS

Metric male 24° cone h.t.

Mâle métrique 24 série S

CES DOK-S metrisch

Macho rosca metrica asiento
24° serie S

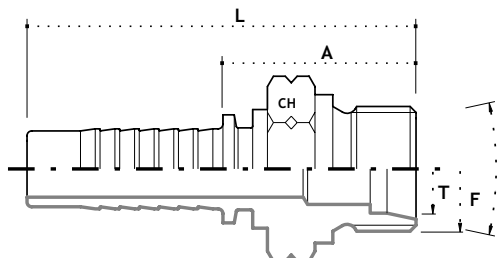

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | | - | CH | A | L |
| ME0314S6 | 5 | 3/16" | 03 | M14 x 1.5 | 6 | - | 14 | 24 | 50 |
| ME0316S8 | 5 | 3/16" | 03 | M16 x 1.5 | 8 | - | 17 | 25 | 50 |
| ME0414S6 | 6 | 1/4" | 04 | M14 x 1.5 | 6 | - | 14 | 24 | 53 |
| ME0416S8 | 6 | 1/4" | 04 | M16 x 1.5 | 8 | - | 17 | 25 | 53 |
| ME0418S10 | 6 | 1/4" | 04 | M18 x 1.5 | 10 | - | 19 | 25 | 53 |
| ME0420S12 | 6 | 1/4" | 04 | M20 x 1.5 | 12 | - | 22 | 27 | 55 |
| ME0518S10 | 8 | 5/16" | 05 | M18 x 1.5 | 10 | - | 19 | 25 | 53 |
| ME0520S12 | 8 | 5/16" | 05 | M20 x 1.5 | 12 | - | 22 | 26.5 | 55 |
| ME0618S10 | 10 | 3/8" | 06 | M18 x 1.5 | 10 | - | 19 | 26 | 55 |
| ME0620S12 | 10 | 3/8" | 06 | M20 x 1.5 | 12 | - | 22 | 27 | 57 |
| ME0622S14 | 10 | 3/8" | 06 | M22 x 1.5 | 14 | - | 24 | 29 | 59.5 |
| ME0822S14 | 12 | 1/2" | 08 | M22 x 1.5 | 14 | - | 24 | 30 | 63 |
| ME0824S16 | 12 | 1/2" | 08 | M24 x 1.5 | 16 | - | 27 | 31 | 64 |
| ME1030S20 | 16 | 5/8" | 10 | M30 x 2 | 20 | - | 32 | 33 | 69 |
| ME1230S20 | 20 | 3/4" | 12 | M30 x 2 | 20 | - | 32 | 34 | 75 |
| ME1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | - | 38 | 36 | 76.5 |
| ME1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | - | 38 | 38.5 | 93.5 |
| ME1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | - | 46 | 42 | 96 |
| ME2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | - | 46 | 42 | 103 |
| ME2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | - | 55 | 46 | 105 |
| ME2452S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | - | 55 | 46 | 117 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA METRICA O-RING 24° DKOS

O-Ring metric female 24°
cone h.t.

Femelle droite cône 24°
O-Ring série S

DKO-S innengew mit O-Ring

Hembra rosca metrica asiento
24° O-Ring serie S

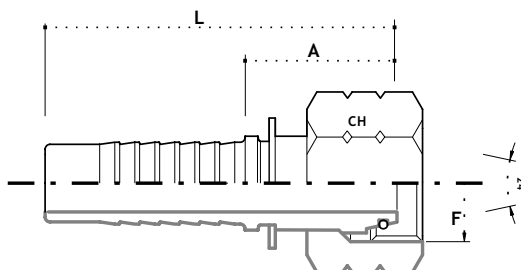

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | - | CH | A | L |
| FE0314S6 | 5 | 3/16" | 03 | M14 x 1.5 | 6 | - | 17 | 25.5 | 50 |
| FE0316S8 | 5 | 3/16" | 03 | M16 x 1.5 | 8 | - | 19 | 25.5 | 50 |
| FE0414S6 | 6 | 1/4" | 04 | M14 x 1.5 | 6 | - | 17 | 25.5 | 53 |
| FE0416S8 | 6 | 1/4" | 04 | M16 x 1.5 | 8 | - | 19 | 26 | 54 |
| FE0418S10 | 6 | 1/4" | 04 | M18 x 1.5 | 10 | - | 22 | 26 | 54 |
| FE0420S12 | 6 | 1/4" | 04 | M20 x 1.5 | 12 | - | 24 | 26 | 54 |
| FE0518S10 | 8 | 5/16" | 05 | M18 x 1.5 | 10 | - | 22 | 26.5 | 54.5 |
| FE0520S12 | 8 | 5/16" | 05 | M20 x 1.5 | 12 | - | 24 | 26 | 54 |
| FE0618S10 | 10 | 3/8" | 06 | M18 x 1.5 | 10 | - | 22 | 26.5 | 56.5 |
| FE0620S12 | 10 | 3/8" | 06 | M20 x 1.5 | 12 | - | 24 | 26.5 | 54.5 |
| FE0622S14 | 10 | 3/8" | 06 | M22 x 1.5 | 14 | - | 27 | 27 | 57 |
| FE0822S14 | 12 | 1/2" | 08 | M22 x 1.5 | 14 | - | 27 | 27.5 | 60.5 |
| FE0824S16 | 12 | 1/2" | 08 | M24 x 1.5 | 16 | - | 30 | 32 | 65 |
| FE1030S20 | 16 | 5/8" | 10 | M30 x 2 | 20 | - | 36 | 37 | 73 |
| FE1230S20 | 10 | 3/4" | 12 | M30 x 2 | 20 | - | 36 | 37.5 | 78.5 |
| FE1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | - | 46 | 38.5 | 79.5 |
| FE1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | - | 46 | 39.5 | 94.5 |
| FE1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | - | 50 | 40.5 | 95.5 |
| FE2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | - | 50 | 41.5 | 102 |
| FE2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | - | 60 | 47 | 107.5 |
| FE2452S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | - | 60 | 47 | 118 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° METRICA O-RING 24° DKOS

90° O-Ring metric swept
elbow 24° cone h.t.

Embout femelle 90° cône
24° O-Ring série S

DKO-S 90° bogen reihe S

Hembra 90° rosca metrica
asiento 24° O-Ring serie S

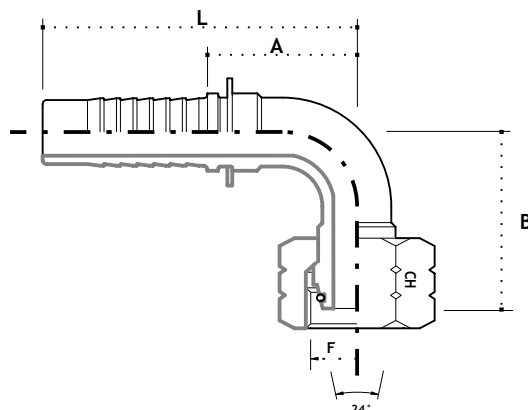

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90E0314S6 | 5 | 3/16" | 03 | M14 x 1.5 | 6 | 17 | 31.5 | 29.5 | 53.5 |
| F90E0316S8 | 5 | 3/16" | 03 | M16 x 1.5 | 8 | 19 | 31.5 | 29.5 | 53.5 |
| *F90E0414S6 | 6 | 1/4" | 04 | M14 x 1.5 | 6 | 17 | 31.5 | 29.5 | 57 |
| F90E0416S8 | 6 | 1/4" | 04 | M16 x 1.5 | 8 | 19 | 31.5 | 29.5 | 57 |
| F90E0418S10 | 6 | 1/4" | 04 | M18 x 1.5 | 10 | 22 | 32.5 | 29 | 56.5 |
| F90E0420S12 | 6 | 1/4" | 04 | M20 x 1.5 | 12 | 24 | 30.5 | 27 | 55 |
| F90E0518S10 | 8 | 5/16" | 05 | M18 x 1.5 | 10 | 22 | 32.5 | 31 | 59 |
| F90E0520S12 | 8 | 5/16" | 05 | M20 x 1.5 | 12 | 24 | 37 | 29 | 57 |
| *F90E0618S10 | 10 | 3/8" | 06 | M18 x 1.5 | 10 | 22 | 38 | 33 | 63 |
| F90E0620S12 | 10 | 3/8" | 06 | M20 x 1.5 | 12 | 24 | 37.5 | 35.5 | 65 |
| F90E0622S14 | 10 | 3/8" | 06 | M22 x 1.5 | 14 | 27 | 42 | 34 | 64 |
| F90E0822S14 | 12 | 1/2" | 08 | M22 x 1.5 | 14 | 27 | 44 | 39.5 | 72 |
| F90E0824S16 | 12 | 1/2" | 08 | M24 x 1.5 | 16 | 30 | 45 | 39.5 | 72 |
| F90E1030S20 | 16 | 5/8" | 10 | M30 x 2 | 20 | 36 | 56 | 48.5 | 84 |
| F90E1230S20 | 20 | 3/4" | 12 | M30 x 2 | 20 | 36 | 59 | 56.5 | 97 |
| F90E1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | 46 | 59 | 56.5 | 97 |
| F90E1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | 46 | 75 | 73 | 127 |
| F90E1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | 50 | 75 | 73 | 127 |
| F90E2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | 50 | 86 | 92 | 152 |
| F90E2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | 60 | 86 | 92 | 152 |
| F90E2452S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | 60 | 94 | 99 | 170 |
| *DADOPINZATO | - | - | - | - | - | - | - | - | - |
| CRINPEDNUT | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° METRICA O-RING 24° DKOS

45° O-Ring metric swept
elbow 24° cone h.t.

Embout femelle 45° cone 24°
O-Ring série S

DKO-S 45° bogen reihe S

Hembra 45° rosca metrica
asiento 24° O-Ring serie S

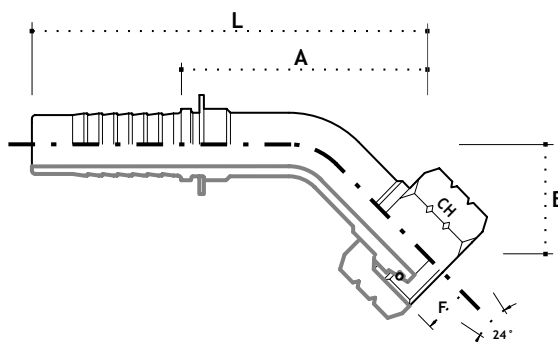

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45E0314S6 | 5 | 3/16" | 03 | M14 x 1.5 | 6 | 17 | 15 | 37 | 65 |
| F45E0316S8 | 5 | 3/16" | 03 | M16 x 1.5 | 8 | 19 | 15 | 37 | 65 |
| *F45E0414S6 | 6 | 1/4" | 04 | M14 x 1.5 | 6 | 17 | 17 | 40 | 68 |
| F45E0416S8 | 6 | 1/4" | 04 | M16 x 1.5 | 8 | 19 | 17 | 50 | 78 |
| F45E0418S10 | 6 | 1/4" | 04 | M18 x 1.5 | 10 | 22 | 17 | 48.5 | 76 |
| F45E0420S12 | 6 | 1/4" | 04 | M20 x 1.5 | 12 | 24 | 17 | 48.5 | 76 |
| *F45E0518S10 | 8 | 5/16" | 05 | M18 x 1.5 | 10 | 22 | 17 | 52.5 | 80 |
| F45E0520S12 | 8 | 5/16" | 05 | M20 x 1.5 | 12 | 24 | 20 | 50 | 78 |
| F45E0618S10 | 10 | 3/8" | 06 | M18 x 1.5 | 10 | 22 | 20 | 55 | 85 |
| F45E0620S12 | 10 | 3/8" | 06 | M20 x 1.5 | 12 | 24 | 17 | 57 | 86.5 |
| F45E0622S14 | 10 | 3/8" | 06 | M22 x 1.5 | 14 | 27 | 19 | 59 | 88.5 |
| F45E0822S14 | 12 | 1/2" | 08 | M22 x 1.5 | 14 | 27 | 22 | 65 | 98 |
| F45E0824S16 | 12 | 1/2" | 08 | M24 x 1.5 | 16 | 30 | 22 | 66.5 | 99 |
| F45E1030S20 | 16 | 5/8" | 10 | M30 x 2 | 20 | 36 | 26 | 64.5 | 100 |
| F45E1230S20 | 20 | 3/4" | 12 | M30 x 2 | 20 | 36 | 27 | 64 | 104.5 |
| F45E1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | 46 | 28 | 70 | 110 |
| F45E1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | 46 | 38 | 88.5 | 143 |
| F45E1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | 50 | 38 | 89 | 144 |
| F45E2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | 50 | 35 | 104.5 | 164.5 |
| F45E2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | 60 | 35 | 104.5 | 164.5 |
| F45E2452S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | 60 | 45 | 119 | 189 |
| *DADOPINZATO | - | - | - | - | - | - | - | - | - |
| CRINPEDNUT | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


MASCHIO METRICO SV 24° SERIE FRANCESE

Metric male 24° french type

Embout mâle cone 24° tube gaz

AGF 24° innen konus (fr. reihe gas)

Macho rosca metrica asiento 24° tubo gas

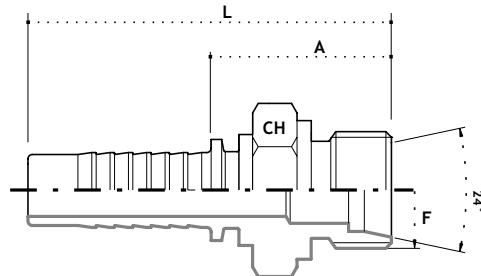

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | | - | CH | A | L |
| ME0413F | 6 | 1/4" | 04 | M20x1.5 | 13 | - | 22 | 26.7 | 55.2 |
| ME0513F | 8 | 5/16" | 05 | M20x1.5 | 13 | - | 22 | 26.7 | 55.2 |
| ME0613F | 10 | 3/8" | 06 | M20x1.5 | 13 | - | 22 | 26.7 | 57.2 |
| ME0617F | 10 | 3/8" | 06 | M24x1.5 | 17 | - | 27 | 30.2 | 60.7 |
| ME0817F | 12 | 1/2" | 08 | M24x1.5 | 17 | - | 27 | 30.7 | 63.7 |
| ME0821F | 12 | 1/2" | 08 | M30x1.5 | 21 | - | 32 | 31.2 | 64.2 |
| ME1021F | 16 | 5/8" | 10 | M30x1.5 | 21 | - | 32 | 31.2 | 67.2 |
| ME1221F | 20 | 3/4" | 12 | M30x1.5 | 21 | - | 32 | 31.7 | 73.2 |
| ME1227F | 20 | 3/4" | 12 | M36x1.5 | 27 | - | 38 | 31.7 | 73.2 |
| ME1633F | 25 | 1" | 16 | M45x1.5 | 33 | - | 46 | 37.2 | 92.2 |
| ME2033F | 32 | 1.1/4" | 20 | M45x1.5 | 33 | - | 46 | 38.2 | 99.2 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FEMMINA METRICA DIRITTA 24° SERIE FRANCESE

Metric female 24° french type

Femelle métrique droite
24° série française

DKM mit 24° Konus
franzoesische Serie

Hembra recta métrica 24°
series francesa

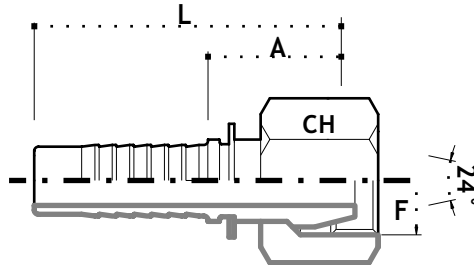

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | - | CH | A | L |
| FE0413F | 6 | 1/4" | 04 | M20 x 1.5 | - | - | 24 | 23.5 | 51.5 |
| FE0513F | 8 | 5/16" | 05 | M20 x 1.5 | - | - | 24 | 23.5 | 51.5 |
| FE0613F | 10 | 3/8" | 06 | M20 x 1.5 | - | - | 24 | 23.5 | 53.5 |
| FE0617F | 10 | 3/8" | 06 | M24 x 1.5 | - | - | 30 | 27 | 57 |
| FE0817F | 12 | 1/2" | 08 | M24 x 1.5 | - | - | 30 | 27.5 | 60.5 |
| FE0821F | 12 | 1/2" | 08 | M30 x 1.5 | - | - | 36 | 31 | 64 |
| FE1021F | 16 | 5/8" | 10 | M30 x 1.5 | - | - | 36 | 31 | 67 |
| FE1221F | 20 | 3/4" | 12 | M30 x 1.5 | - | - | 36 | 31.5 | 72.5 |
| FE1227F | 20 | 3/4" | 12 | M36 x 1.5 | - | - | 41 | 34 | 75 |
| FE1633F | 25 | 1" | 16 | M45 x 1.5 | - | - | 50 | 34 | 89 |
| FE2033F | 32 | 1.1/4" | 20 | M45 x 1.5 | - | - | 50 | 34 | 95 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° METRICA SERIE FRANCESE 24°

90° metric swept elbow 24° french type

Embout femelle 90° cône 24° série L

DKF 90° bogen (fr. Reihe gas)

Hembra 90° rosca metrica asiento 24° serie Francesa

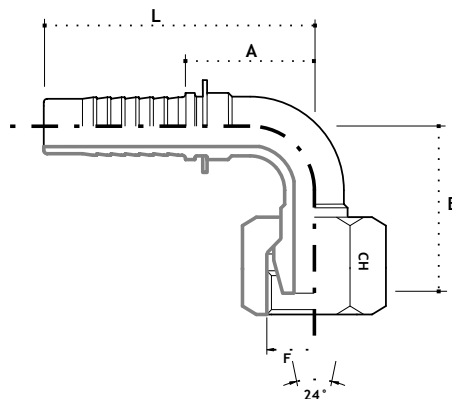

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|-----|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90E0413F | 6 | 1/4" | 04 | M20x1.5 | - | 24 | 32.5 | 27 | 55 |
| F90E0513F | 8 | 5/16" | 05 | M20x1.5 | - | 24 | 39 | 29 | 57 |
| F90E0613F | 10 | 3/8" | 06 | M20x1.5 | - | 24 | 39.5 | 35.5 | 65 |
| F90E0617F | 10 | 3/8" | 06 | M24x1.5 | - | 30 | 48 | 36 | 69 |
| F90E0817F | 12 | 1/2" | 08 | M24x1.5 | - | 30 | 48 | 39.5 | 72 |
| F90E0821F | 12 | 1/2" | 08 | M30x1.5 | - | 36 | 61 | 45.5 | 81 |
| F90E1021F | 16 | 5/8" | 10 | M30x1.5 | - | 36 | 61 | 48.5 | 84 |
| F90E1221F | 20 | 3/4" | 12 | M30x1.5 | - | 36 | 64 | 56.5 | 97 |
| F90E1227F | 20 | 3/4" | 12 | M36x1.5 | - | 41 | 64 | 56.5 | 97 |
| F90E1633F | 25 | 1" | 16 | M45x1.5 | - | 50 | 91 | 86 | 146 |
| F90E2033F | 32 | 1.1/4" | 20 | M45x1.5 | - | 50 | 91 | 92 | 152 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° METRICA SERIE FRANCESE 24°

45° metric swept elbow 24° french type

Embout femelle 45° cône 24° série L


DKF 45° bogen (fr. Reihe gas)

Hembra 45° rosca metrica asiento 24° serie Francesa

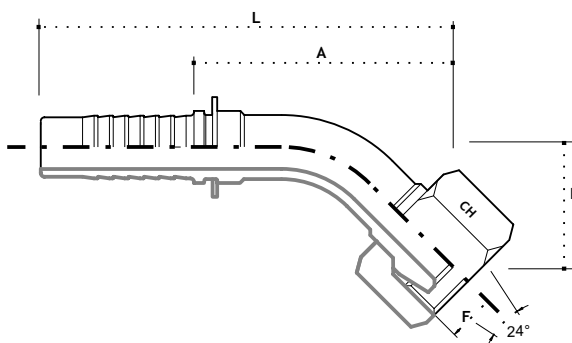

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45E0413F | 6 | 1/4" | 04 | M20 x 1.5 | - | 24 | 18.5 | 50 | 77.5 |
| F45E0513F | 8 | 5/16" | 05 | M20 x 1.5 | - | 24 | 21 | 52 | 79 |
| F45E0613F | 10 | 3/8" | 06 | M20 x 1.5 | - | 24 | 18.5 | 58.5 | 88 |
| F45E0617F | 10 | 3/8" | 06 | M24 x 1.5 | - | 30 | 24 | 65.5 | 98 |
| F45E0817F | 12 | 1/2" | 08 | M24 x 1.5 | - | 30 | 24 | 68.5 | 101 |
| F45E0821F | 12 | 1/2" | 08 | M30 x 1.5 | - | 36 | 29 | 68 | 102 |
| F45E1021F | 16 | 5/8" | 10 | M30 x 1.5 | - | 36 | 29 | 68 | 103.5 |
| F45E1221F | 20 | 3/4" | 12 | M30 x 1.5 | - | 36 | 30 | 69 | 108 |
| F45E1227F | 20 | 3/4" | 12 | M36 x 1.5 | - | 41 | 31 | 73 | 113 |
| F45E1633F | 25 | 1" | 16 | M45 x 1.5 | - | 50 | 36 | 101 | 161 |
| F45E2033F | 32 | 1.1/4" | 20 | M45 x 1.5 | - | 50 | 38 | 107 | 167 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

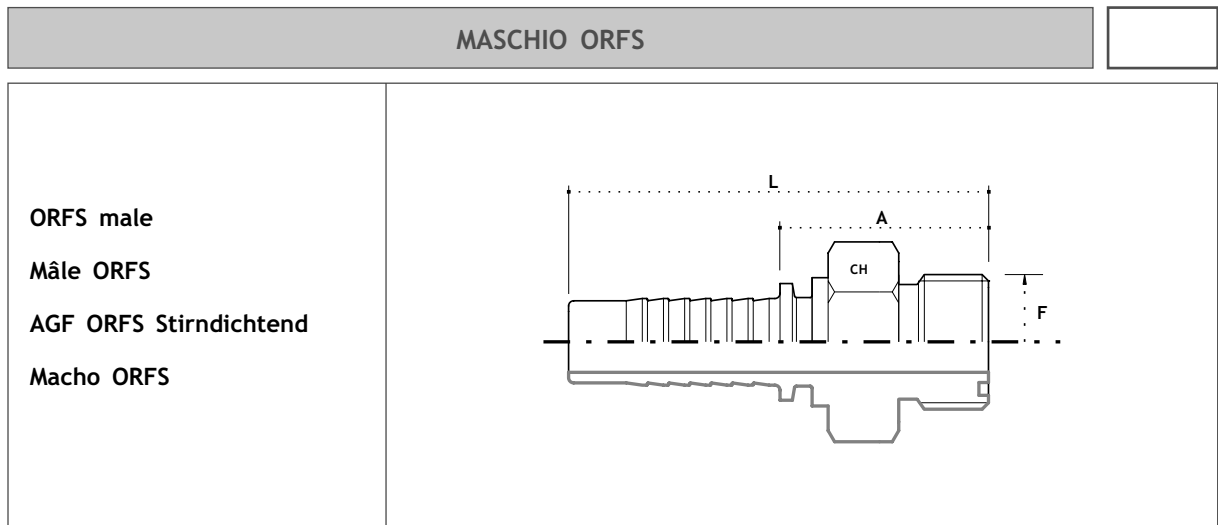


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| MORFS0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | - | 17 | 24 | 52 |
| MORFS0409 | 6 | 1/4" | 04 | 11/16" - 16 | - | - | 19 | 27.5 | 55.5 |
| MORFS0509 | 8 | 5/16" | 05 | 11/16" - 16 | - | - | 19 | 27.5 | 55.5 |
| MORFS0609 | 10 | 3/8" | 06 | 11/16" - 16 | - | - | 19 | 27.5 | 57.5 |
| MORFS0611 | 10 | 3/8" | 06 | 13/16" - 16 | - | - | 22 | 30.5 | 60.5 |
| MORFS0613 | 10 | 3/8" | 06 | 1" - 14 | - | - | 27 | 33.5 | 63.5 |
| MORFS0811 | 12 | 1/2" | 08 | 13/16" - 16 | - | - | 27 | 34 | 67 |
| MORFS0813 | 12 | 1/2" | 08 | 1" - 14 | - | - | 27 | 31.5 | 67 |
| MORFS0814 | 12 | 1/2" | 08 | 1.3/16" - 12 | - | - | 32 | 36 | 68.5 |
| MORFS1013 | 16 | 5/8" | 10 | 1" - 14 | - | - | 27 | 34 | 70 |
| MORFS1014 | 16 | 5/8" | 10 | 1.3/16" - 12 | - | - | 32 | 37 | 73 |
| MORFS1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | - | 32 | 38 | 79 |
| MORFS1215 | 20 | 3/4" | 12 | 1.7/16" - 12 | - | - | 41 | 38.5 | 79.5 |
| MORFS1615 | 25 | 1" | 16 | 1.7/16" - 12 | - | - | 41 | 39.5 | 94 |
| MORFS2021 | 32 | 1.1/4" | 20 | 1.11/16" - 12 | - | - | 46 | 40 | 101 |
| MORFS2432 | 40 | 1.1/2" | 24 | 2" - 12 | - | - | 55 | 43 | 114 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FEMMINA DIRITTA ORFS

ORFS straight female
Femelle ORFS
ORFS - UNF gewinde
Hembra ORFS

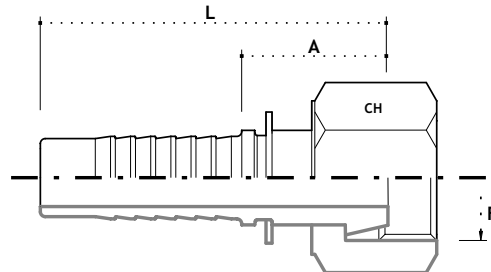

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| FORFS0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | - | 17 | 20.5 | 48.5 |
| FORFS0409 | 6 | 1/4" | 04 | 11/16" - 16 | - | - | 22 | 23 | 51 |
| FORFS0509 | 8 | 5/16" | 05 | 11/16" - 16 | - | - | 22 | 23 | 51 |
| FORFS0609 | 10 | 3/8" | 06 | 11/16" - 16 | - | - | 22 | 23.5 | 53.5 |
| FORFS0611 | 10 | 3/8" | 06 | 13/16" - 16 | - | - | 24 | 26 | 56 |
| FORFS0811 | 12 | 1/2" | 08 | 13/16" - 16 | - | - | 24 | 26.5 | 59.5 |
| FORFS0813 | 12 | 1/2" | 08 | 1" - 14 | - | - | 30 | 30 | 63 |
| FORFS0814 | 12 | 1/2" | 08 | 1.3/16" - 12 | - | - | 36 | 32.5 | 65 |
| FORFS1013 | 16 | 5/8" | 10 | 1" - 14 | - | - | 30 | 30 | 66 |
| FORFS1014 | 16 | 5/8" | 10 | 1.3/16" - 12 | - | - | 36 | 32 | 68.5 |
| FORFS1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | - | 36 | 33 | 74 |
| FORFS1215 | 20 | 3/4" | 12 | 1.7/16" - 12 | - | - | 41 | 34 | 75 |
| FORFS1615 | 25 | 1" | 16 | 1.7/16" - 12 | - | - | 41 | 35 | 90 |
| FORFS2021 | 32 | 1.1/4" | 20 | 1.11/16" - 12 | - | - | 50 | 35.5 | 96 |
| FORFS2432 | 40 | 1.1/2" | 24 | 2" - 12 | - | - | 60 | 37 | 108 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 90° ORFS

90° ORFS female

ORFS femelle 90°

DK 90° bogen ORFS UNF,
stirndichtend

Hembra codo 90°

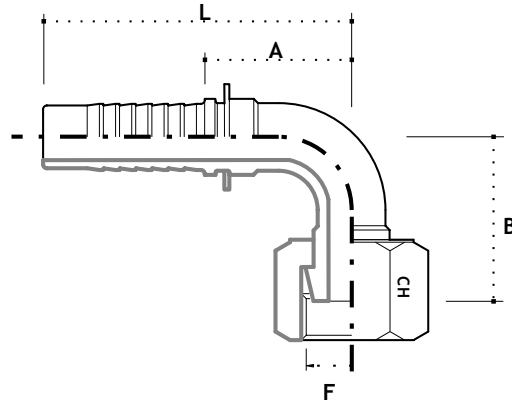

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F90ORFS0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | 17 | 29.5 | 28 | 56 |
| F90ORFS0409 | 6 | 1/4" | 04 | 11/16" - 16 | - | 22 | 30 | 28 | 56 |
| F90ORFS0509 | 8 | 5/16" | 05 | 11/16" - 16 | - | 22 | 29 | 29 | 56.5 |
| F90ORFS0609 | 10 | 3/8" | 06 | 11/16" - 16 | - | 22 | 29 | 36 | 66 |
| F90ORFS0611 | 10 | 3/8" | 06 | 13/16" - 16 | - | 24 | 32 | 34 | 64 |
| F90ORFS0811 | 12 | 1/2" | 08 | 13/16" - 16 | - | 24 | 36 | 37.5 | 70.5 |
| F90ORFS0813 | 12 | 1/2" | 08 | 1" - 14 | - | 30 | 39 | 39 | 72 |
| F90ORFS0814 | 12 | 1/2" | 08 | 1.3/16" - 12 | - | 36 | 41 | 38 | 71 |
| F90ORFS1013 | 16 | 5/8" | 10 | 1" - 14 | - | 30 | 43.5 | 51.5 | 87.5 |
| F90ORFS1014 | 16 | 5/8" | 10 | 1.3/16" - 12 | - | 36 | 48 | 46.5 | 82.5 |
| F90ORFS1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 49 | 56 | 96.5 |
| F90ORFS1215 | 20 | 3/4" | 12 | 1.7/16" - 12 | - | 41 | 54 | 56.5 | 97 |
| F90ORFS1615 | 25 | 1" | 16 | 1.7/16" - 12 | - | 41 | 59.5 | 74 | 129 |
| F90ORFS2021 | 32 | 1.1/4" | 20 | 1.11/16" - 12 | - | 50 | 75.5 | 90 | 150.5 |
| F90ORFS2432 | 40 | 1.1/2" | 24 | 2" - 12 | - | 60 | 84 | 99 | 170 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


CURVA 45° ORFS

45° ORFS female

ORFS femelle 45°

DK 45° bogen ORFS UNF
stirndichtend


Hembra codo 45°

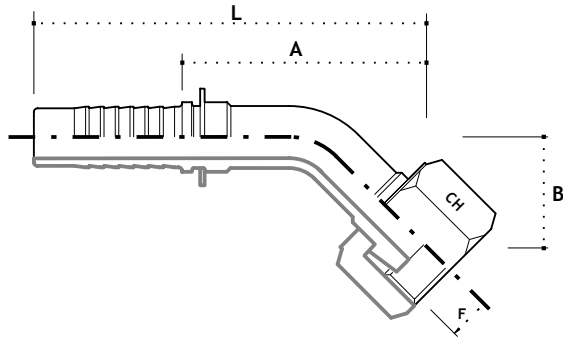

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| F45ORFS0406 | 6 | 1/4" | 04 | 9/16" - 18 | - | 17 | 15 | 45 | 73 |
| F45ORFS0409 | 6 | 1/4" | 04 | 11/16" - 16 | - | 22 | 15.5 | 45.5 | 73.5 |
| F45ORFS0509 | 8 | 5/16" | 05 | 11/16" - 16 | - | 22 | 15.5 | 46 | 74 |
| F45ORFS0609 | 10 | 3/8" | 06 | 11/16" - 16 | - | 22 | 13 | 51 | 81 |
| F45ORFS0611 | 10 | 3/8" | 06 | 13/16" - 16 | - | 24 | 17 | 52 | 82 |
| F45ORFS0811 | 12 | 1/2" | 08 | 13/16" - 16 | - | 24 | 18 | 58 | 91 |
| F45ORFS0813 | 12 | 1/2" | 08 | 1" - 14 | - | 30 | 20 | 61 | 94 |
| F45ORFS0814 | 12 | 1/2" | 08 | 1.3/16" - 12 | - | 36 | 24 | 62 | 95 |
| F45ORFS1013 | 16 | 5/8" | 10 | 1" - 14 | - | 30 | 20 | 55 | 91 |
| F45ORFS1014 | 16 | 5/8" | 10 | 1.3/16" - 12 | - | 36 | 21 | 57 | 93 |
| F45ORFS1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 23 | 58 | 98 |
| F45ORFS1215 | 20 | 3/4" | 12 | 1.7/16" - 12 | - | 41 | 27 | 62.5 | 103 |
| F45ORFS1615 | 25 | 1" | 16 | 1.7/16" - 12 | - | 41 | 26 | 81 | 136 |
| F45ORFS2021 | 32 | 1.1/4" | 20 | 1.11/16" - 12 | - | 50 | 34 | 93 | 152.5 |
| F45ORFS2432 | 40 | 1.1/2" | 24 | 2" - 12 | - | 60 | 45 | 112 | 182 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


GIUNZIONE TUBO DIRITTA
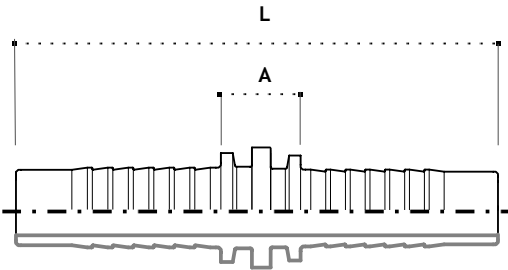
| | |
|--|--|
| <p>Double connector</p> <p>Jonction tuyaux droite</p> <p>Verbindungs nippel</p> <p>Conexi3n recta por manquera</p> |  |
|--|--|

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|---|----|-----|
| | DN | Pollici Inches | Diam. Size | F | - | - | - | A | L |
| GD04 | 6 | 1/4" | 04 | - | - | - | - | 14 | 70 |
| GD05 | 8 | 5/16" | 05 | - | - | - | - | 14 | 70 |
| GD06 | 10 | 3/8" | 06 | - | - | - | - | 15 | 75 |
| GD08 | 12 | 1/2" | 08 | - | - | - | - | 20 | 86 |
| GD10 | 16 | 5/8" | 10 | - | - | - | - | 16 | 88 |
| GD12 | 20 | 3/4" | 12 | - | - | - | - | 18 | 100 |
| GD16 | 25 | 1" | 16 | - | - | - | - | 20 | 130 |
| GD20 | 32 | 1.1/4" | 20 | - | - | - | - | 21 | 143 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

CODOLO A SALDARE

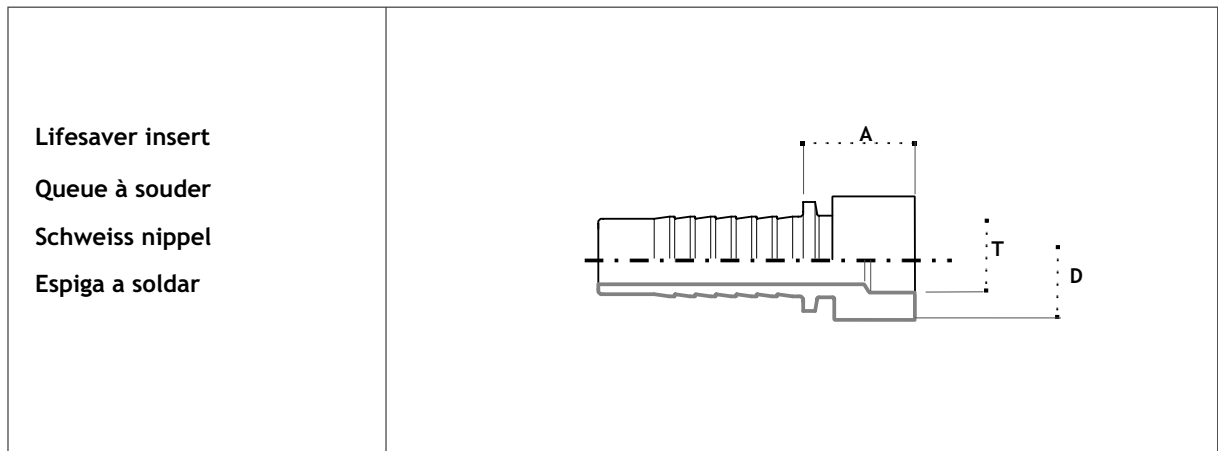

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|----|--|
| | DN | Pollici Inches | Diam. Size | F | - | T | A | D | |
| CS03 | 5 | 3/16" | 03 | - | - | - | - | - | |
| CS04 | 6 | 1/4" | 04 | - | - | - | - | - | |
| CS04T8 | 6 | 1/4" | 04 | - | - | 8 | - | - | |
| CS05 | 8 | 5/16" | 05 | - | - | - | - | - | |
| CS06 | 10 | 3/8" | 06 | - | - | - | - | - | |
| CS06T10 | 10 | 3/8" | 06 | - | - | 10 | 14 | 16 | |
| CS06T12 | 10 | 3/8" | 06 | - | - | 12 | 14 | 16 | |
| CS08 | 12 | 1/2" | 08 | - | - | - | 16 | 20 | |
| CS08T14 | 12 | 1/2" | 08 | - | - | 14 | 16 | 20 | |
| CS08T15 | 12 | 1/2" | 08 | - | - | 15 | 16 | 20 | |
| CS08T16 | 12 | 1/2" | 08 | - | - | 16 | 16 | 20 | |
| CS10 | 16 | 5/8" | 10 | - | - | - | 18 | 24 | |
| CS12 | 20 | 3/4" | 12 | - | - | - | 15 | 26 | |
| CS16 | 25 | 1" | 16 | - | - | - | 22 | 32 | |
| CS20 | 32 | 1.1/4" | 20 | - | - | - | - | - | |
| CS24 | 40 | 1.1/2" | 24 | - | - | - | - | - | |
| CS32 | 50 | 2" | 32 | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |

Raccordi a pressione - SERIE STANDARD


ERMETO DIRITTO FRANCESE

Straight standpipe french type

Embout lisse droit

Französischer Rohrstutzen
französisch


Espiga lisa recta

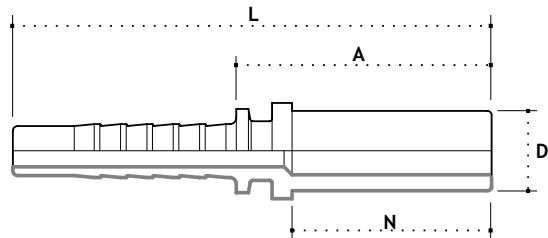

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | D | N | A | L |
| PDL0413F | 6 | 1/4" | 04 | - | - | 13 | 22 | 29.5 | 58 |
| PDL0513F | 8 | 5/16" | 05 | - | - | 13 | 22 | 29.5 | 58 |
| PDL0613F | 10 | 3/8" | 06 | - | - | 13 | 22 | 29.5 | 60 |
| PDL0617F | 10 | 3/8" | 06 | - | - | 17 | 24 | 31.5 | 62 |
| PDL0817F | 12 | 1/2" | 08 | - | - | 17 | 24 | 32.5 | 65.5 |
| PDL0821F | 12 | 1/2" | 08 | - | - | 21 | 26 | 34.5 | 67.5 |
| PDL1021F | 16 | 5/8" | 10 | - | - | 21 | 26 | 34.5 | 70.5 |
| PDL1221F | 20 | 3/4" | 12 | - | - | 21 | 26 | 35.3 | 76.3 |
| PDL1227F | 20 | 3/4" | 12 | - | - | 26 | 25 | 34.3 | 75.3 |
| PDL1633F | 25 | 1" | 16 | - | - | 33 | 27 | 37.3 | 92.3 |
| PDL2033F | 32 | 1.1/4" | 20 | - | - | 33 | 27 | 38 | 99 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

ERMETO DIRITTO

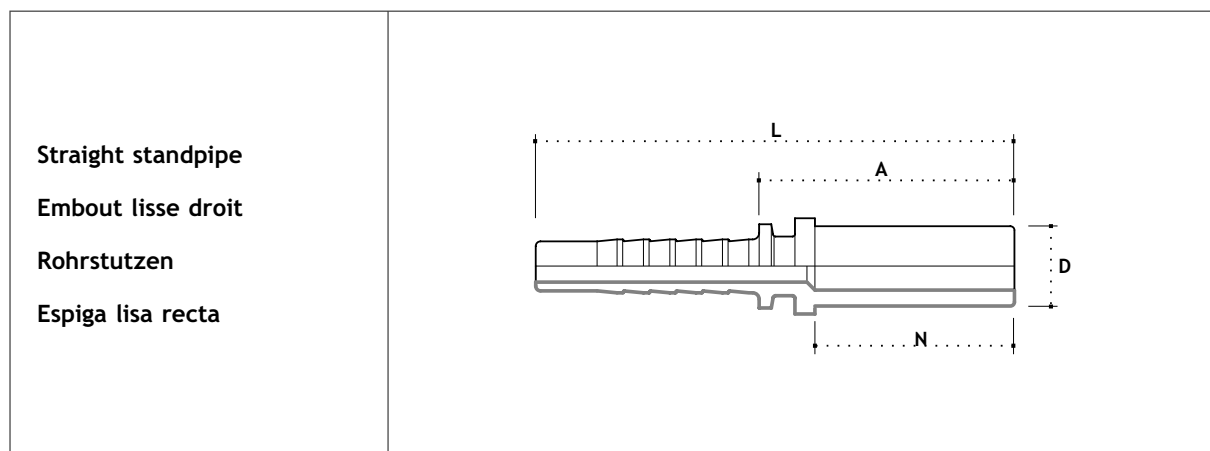


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|-------------|-------------|----------------|------------|------------------|--------------|----|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | D | N | A | L |
| PDL0306 | 5 | 3/16" | 03 | - | - | 6 | 24 | 30 | 55 |
| PDL0308 | 5 | 3/16" | 03 | - | - | 8 | 24 | 30 | 55 |
| PDL0406 | 6 | 1/4" | 04 | - | - | 6 | 22.5 | 30.5 | 58.5 |
| PDL0408 | 6 | 1/4" | 04 | - | - | 8 | 23 | 30.5 | 58.5 |
| PDL0410 | 6 | 1/4" | 04 | - | - | 10 | 25 | 32 | 59.5 |
| PDL0412 | 6 | 1/4" | 04 | - | - | 12 | 25 | 32 | 60 |
| PDL0508 | 8 | 5/16" | 05 | - | - | 8 | 23 | 30 | 58 |
| PDL0510 | 8 | 5/16" | 05 | - | - | 10 | 25 | 32 | 60 |
| PDL0512 | 8 | 5/16" | 05 | - | - | 12 | 25 | 32 | 60 |
| PDL0610 | 10 | 3/8" | 06 | - | - | 10 | 25.5 | 33 | 63 |
| PDL0612 | 10 | 3/8" | 06 | - | - | 12 | 25 | 32.5 | 62 |
| PDL0614 | 10 | 3/8" | 06 | - | - | 14 | 28 | 35.5 | 65.5 |
| PDL0615 | 10 | 3/8" | 06 | - | - | 15 | 25.5 | 33 | 63 |
| PDL0812 | 12 | 1/2" | 08 | - | - | 12 | 25 | 33 | 66 |
| PDL0814 | 12 | 1/2" | 08 | - | - | 14 | 28 | 36 | 69 |
| PDL0815 | 12 | 1/2" | 08 | - | - | 15 | 25.5 | 33.5 | 66.5 |
| PDL0816 | 12 | 1/2" | 08 | - | - | 16 | 31 | 39 | 72 |
| PDL0818 | 12 | 1/2" | 08 | - | - | 18 | 27 | 35.5 | 68.5 |
| PDL1018 | 16 | 5/8" | 10 | - | - | 18 | 28 | 36 | 71.5 |
| PDL1020 | 16 | 5/8" | 10 | - | - | 20 | 35 | 43.5 | 79.5 |
| PDL1022 | 16 | 5/8" | 10 | - | - | 22 | 29 | 38 | 74 |
| PDL1218 | 20 | 3/4" | 12 | - | - | 18 | 26 | 34.5 | 75 |
| PDL1220 | 20 | 3/4" | 12 | - | - | 20 | 35 | 44 | 84.5 |
| PDL1222 | 20 | 3/4" | 12 | - | - | 22 | 29.5 | 38 | 80 |

Raccordi a pressione - SERIE STANDARD


ERMETO DIRITTO

Straight standpipe
 Embout lisse droit
 Rohrstützen
 Espiga lisa recta

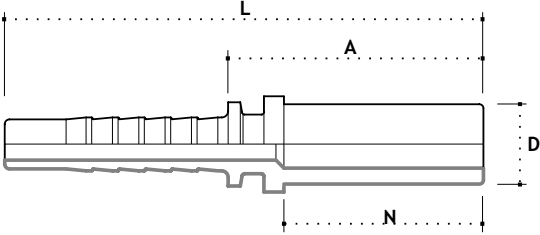

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | D | N | A | L |
| PDL1225 | 20 | 3/4" | 12 | - | - | 25 | 41 | 51 | 91.5 |
| PDL1625 | 25 | 1" | 16 | - | - | 25 | 39.5 | 50 | 105 |
| PDL1628 | 25 | 1" | 16 | - | - | 28 | 30.5 | 41 | 96 |
| PDL1630 | 25 | 1" | 16 | - | - | 30 | 43.5 | 54 | 109 |
| PDL2030 | 32 | 1.1/4" | 20 | - | - | 30 | 43 | 54.5 | 115 |
| PDL2035 | 32 | 1.1/4" | 20 | - | - | 35 | 35.5 | 46.5 | 106.5 |
| PDL2038 | 32 | 1.1/4" | 20 | - | - | 38 | 48 | 60 | 120 |
| PDL2438 | 40 | 1.1/2" | 24 | - | - | 38 | 48 | 60 | 131 |
| PDL2442 | 40 | 1.1/2" | 24 | - | - | 42 | 36 | 47 | 118 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |


Raccordi a pressione - SERIE STANDARD

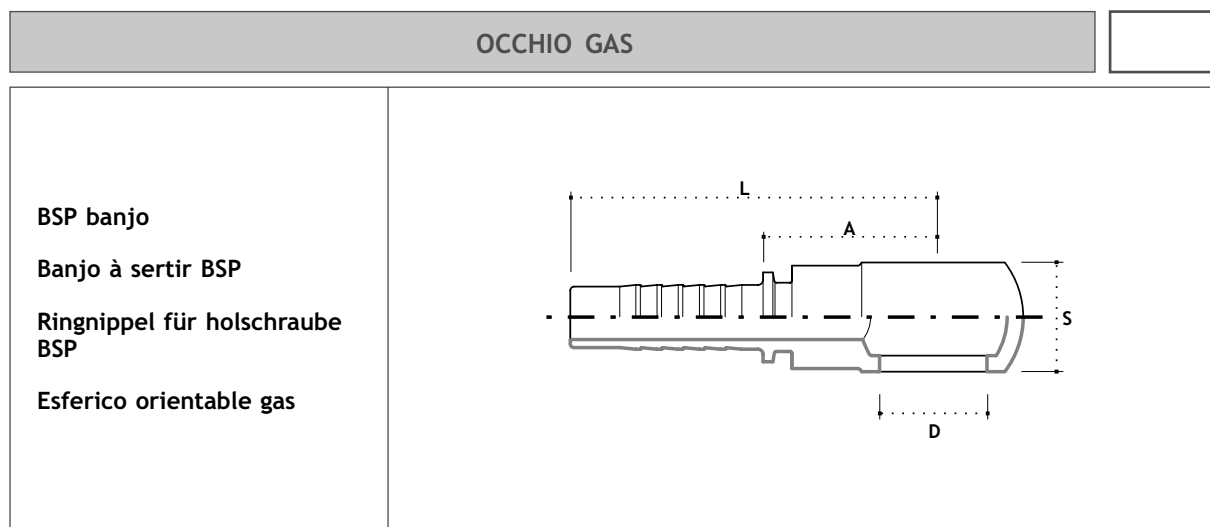

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | | D | S | A | L |
| OG0302 | 5 | 3/16" | 03 | 1/8" - 28 | - | 10 | 10 | 19.5 | 45 |
| OG0304 | 5 | 3/16" | 03 | 1/4" - 19 | - | 13.2 | 14 | 22.5 | 47.5 |
| OG0402 | 6 | 1/4" | 04 | 1/8" - 28 | - | 10 | 10 | 24 | 52 |
| OG0404 | 6 | 1/4" | 04 | 1/4" - 19 | - | 13.2 | 14 | 23 | 51 |
| OG0406 | 6 | 1/4" | 04 | 3/8" - 19 | - | 16.7 | 17 | 26.5 | 54.5 |
| OG0408 | 6 | 1/4" | 04 | 1/2" - 14 | - | 21 | 22 | 32.5 | 60.5 |
| OG0504 | 8 | 5/16" | 05 | 1/4" - 19 | - | 13.2 | 14 | 24 | 52 |
| OG0506 | 8 | 5/16" | 05 | 3/8" - 19 | - | 16.7 | 17 | 26.5 | 54.5 |
| OG0508 | 8 | 5/16" | 05 | 1/2" - 14 | - | 21 | 22 | 27.5 | 61 |
| OG0604 | 10 | 3/8" | 06 | 1/4" - 19 | - | 13.2 | 14 | 31.5 | 61.5 |
| OG0606 | 10 | 3/8" | 06 | 3/8" - 19 | - | 16.7 | 17 | 26.5 | 56.5 |
| OG0608 | 10 | 3/8" | 06 | 1/2" - 14 | - | 21 | 22 | 27.5 | 57.5 |
| OG0806 | 12 | 1/2" | 08 | 3/8" - 19 | - | 16.7 | 17 | 31 | 64 |
| OG0808 | 12 | 1/2" | 08 | 1/2" - 14 | - | 21 | 22 | 33 | 66 |
| OG0810 | 12 | 1/2" | 08 | 5/8" - 14 | - | 23.3 | 25 | 32.5 | 65.5 |
| OG0812 | 12 | 1/2" | 08 | 3/4" - 14 | - | 26.5 | 30 | 34.5 | 67.5 |
| OG1010 | 16 | 5/8" | 10 | 5/8" - 14 | - | 23.3 | 25 | 32.5 | 68.5 |
| OG1012 | 16 | 5/8" | 10 | 3/4" - 14 | - | 26.5 | 30 | 34.5 | 70.5 |
| OG1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | 26.5 | 30 | 35 | 76 |
| OG1216 | 20 | 3/4" | 12 | 1" - 11 | - | 33.4 | 38 | 48 | 89 |
| OG1616 | 25 | 1" | 16 | 1" - 11 | - | 33.4 | 38 | 43 | 98 |
| OG2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

OCCHIO METRICO
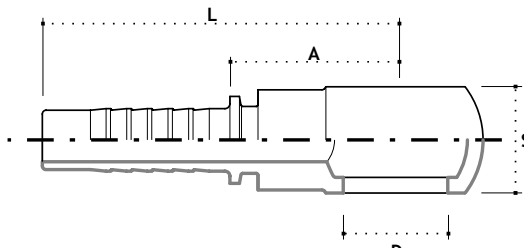
| | |
|---|--|
| <p>Metrici banjo</p> <p>Banjo à sertir métrique</p> <p>Ringnippel für holschraube metrisch</p> <p>Esferico orientable metrico</p> |  |
|---|--|

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|-------------|-------------|----------------|------------|------------------|---|--------------|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | | D | S | A | L |
| OM0310 | 5 | 3/16" | 03 | M10 x 1 | - | 10.1 | 10 | 20 | 45 |
| OM0312 | 5 | 3/16" | 03 | M12 x 1.5 | - | 12.1 | 12 | 21 | 46 |
| OM0314 | 5 | 3/16" | 03 | M14 x 1.5 | - | 14.1 | 14 | 23 | 48 |
| OM0410 | 6 | 1/4" | 04 | M10 x 1 | - | 10.1 | 10 | 24 | 52 |
| OM0412 | 6 | 1/4" | 04 | M12 x 1.5 | - | 12.1 | 11 | 23 | 51 |
| OM0414 | 6 | 1/4" | 04 | M14 x 1.5 | - | 14.1 | 14 | 23 | 51 |
| OM0416 | 6 | 1/4" | 04 | M16 x 1.5 | - | 16.1 | 17 | 25 | 53 |
| OM0418 | 6 | 1/4" | 04 | M18 x 1.5 | - | 18.1 | 20 | 29 | 57 |
| OM0512 | 8 | 5/16" | 05 | M12 x 1.5 | - | 12.1 | 12 | 23 | 52 |
| OM0514 | 8 | 5/16" | 05 | M14 x 1.5 | - | 14.1 | 14 | 24.5 | 52.5 |
| OM0516 | 8 | 5/16" | 05 | M16 x 1.5 | - | 16.1 | 17 | 27 | 55 |
| OM0518 | 8 | 5/16" | 05 | M18 x 1.5 | - | 18.1 | 20 | 29 | 57 |
| OM0520 | 8 | 5/16" | 05 | M20 x 1.5 | - | 20.1 | 22 | 28 | 56 |
| OM0522 | 8 | 5/16" | 05 | M22 x 1.5 | - | 22.1 | 22 | 28 | 56 |
| OM0614 | 10 | 3/8" | 06 | M14 x 1.5 | - | 14.1 | 14 | 27 | 57 |
| OM0616 | 10 | 3/8" | 06 | M16 x 1.5 | - | 16.1 | 17 | 27 | 57 |
| OM0618 | 10 | 3/8" | 06 | M18 x 1.5 | - | 18.1 | 20 | 28 | 58 |
| OM0620 | 10 | 3/8" | 06 | M20 x 1.5 | - | 20.1 | 22 | 28.5 | 58.5 |
| OM0622 | 10 | 1/2" | 06 | M22 x 1.5 | - | 22.1 | 22 | 28.5 | 58.5 |
| OM0818 | 12 | 1/2" | 08 | M18 x 1.5 | - | 18.1 | 20 | 30 | 63 |
| OM0820 | 12 | 1/2" | 08 | M20 x 1.5 | - | 20.1 | 22 | 34 | 67 |
| OM0822 | 12 | 1/2" | 08 | M22 x 1.5 | - | 22.1 | 22 | 34 | 67 |
| OM0826 | 12 | 1/2" | 08 | M26 x 1.5 | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


| | | |
|---|--|--|
| OCCHIO METRICO | | |
| <p>Metrici banjo</p> <p>Banjo à sertir métrique</p> <p>Ringnippel für holschraube metrisch</p> <p>Esferico orientable metrico</p> | | |

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | | D | S | A | L |
| OM1022 | 16 | 5/8" | 10 | M22 x 1.5 | - | 22.1 | 22 | 34 | 70 |
| OM1026 | 16 | 5/8" | 10 | M26 x 1.5 | - | - | - | - | - |
| OM1226 | 20 | 3/4" | 12 | M26 x 1.5 | - | - | - | - | - |
| OM1230 | 20 | 3/4" | 12 | M30 x 1.5 | - | 30.1 | 36 | 41.5 | 82.5 |
| OM1630 | 25 | 1" | 16 | M30 x 1.5 | - | 30.1 | 36 | 41.5 | 96.5 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FLANGIA DIRITTA SAE 3000

Straight flange 3000 PSI
 Embout à bride 3000 PSI droit
 Flanschanschluss 3000 PSI
 Brida recta 3000 PSI

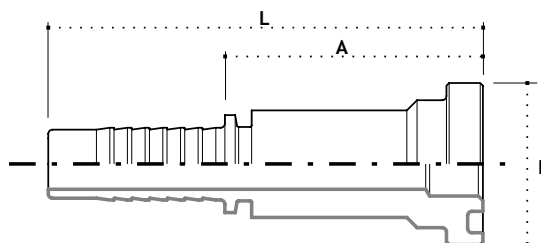

| Codice Code | Tubo - Hose | | | Flangia - Flange | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|------|----|-----|
| | DN | Pollici Inches | Diam. Size | F | D | B | A | L | |
| FDL0808I | 12 | 1/2" | 08 | 1/2" | - | - | 30.2 | 49 | 82 |
| FDL0810I | 12 | 1/2" | 08 | 5/8" | - | - | 34 | 48 | 81 |
| FDL0812I | 12 | 1/2" | 08 | 3/4" | - | - | 38.1 | 52 | 84 |
| FDL1008I | 16 | 5/8" | 10 | 1/2" | - | - | 30.2 | 49 | 85 |
| FDL1010I | 16 | 5/8" | 10 | 5/8" | - | - | 34 | 49 | 85 |
| FDL1012I | 16 | 5/8" | 10 | 3/4" | - | - | 38.1 | 48 | 84 |
| FDL1208I | 20 | 3/4" | 12 | 1/2" | - | - | 30.2 | 47 | 88 |
| FDL1212I | 20 | 3/4" | 12 | 3/4" | - | - | 38.1 | 47 | 88 |
| FDL1216I | 20 | 3/4" | 12 | 1" | - | - | 44.5 | 50 | 91 |
| FDL1612I | 25 | 1" | 16 | 3/4" | - | - | 38.1 | 50 | 91 |
| FDL1616I | 25 | 1" | 16 | 1" | - | - | 44.5 | 50 | 105 |
| FDL1620I | 25 | 1" | 16 | 1.1/4" | - | - | 50.8 | 67 | 120 |
| FDL2016I | 32 | 1.1/4" | 20 | 1" | - | - | 44.5 | 57 | 117 |
| FDL2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | - | 50.8 | 65 | 125 |
| FDL2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | - | 60.3 | 70 | 130 |
| FDL2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | - | 60.3 | 70 | 141 |
| FDL2432I | 40 | 1.1/2" | 24 | 2" | - | - | 71.4 | 72 | 143 |
| FDL3232I | 50 | 2" | 32 | 2" | - | - | 71.4 | 73 | 153 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FLANGIA 90° INTERA SAE 3000

90° Flange one piece 3000 PSI

Embout à bride 90° 3000 PSI

90° Flanschanschluss 3000 PSI

Brida 90° 3000 PSI

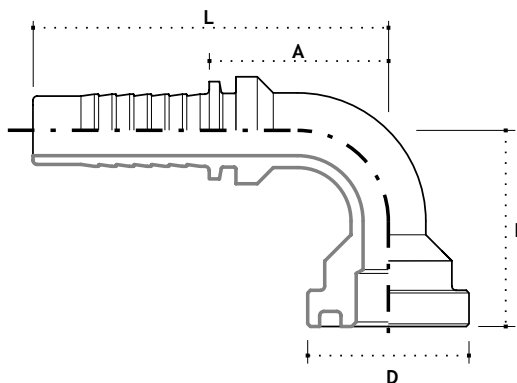

| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| F90L0808I | 12 | 1/2" | 08 | 1/2" | - | 30.2 | 43 | 39 | 72 |
| F90L0812I | 12 | 1/2" | 08 | 3/4" | - | 38.1 | 50 | 39 | 72 |
| F90L1008I | 16 | 5/8" | 10 | 1/2" | - | 30.2 | 49 | 49 | 85 |
| F90L1012I | 16 | 5/8" | 10 | 3/4" | - | 38.1 | 55 | 49 | 85 |
| F90L1208I | 20 | 3/4" | 12 | 1/2" | - | 30.2 | 52 | 57 | 98 |
| F90L1212I | 20 | 3/4" | 12 | 3/4" | - | 38.1 | 58 | 57 | 98 |
| F90L1216I | 25 | 3/4" | 12 | 1" | - | 44.5 | 62 | 57 | 98 |
| F90L1612I | 25 | 1" | 16 | 3/4" | - | 38.1 | 60 | 77 | 132 |
| F90L1616I | 25 | 1" | 16 | 1" | - | 44.5 | 64 | 77 | 132 |
| F90L1620I | 25 | 1" | 16 | 1.1/4" | - | 50.8 | 70 | 77 | 132 |
| F90L2016I | 32 | 1.1/4" | 16 | 1" | - | 44.5 | 82 | 89 | 150 |
| F90L2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 50.8 | 87 | 89 | 150 |
| F90L2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 60.3 | 88 | 89 | 150 |
| F90L2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 60.3 | 102 | 101 | 172 |
| F90L2432I | 40 | 1.1/2" | 24 | 2" | - | 71.4 | 118 | 101 | 172 |
| F90L3232I | 50 | 2" | 32 | 2" | - | 71.4 | 120 | 144 | 224 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FLANGIA 45° INTERA SAE 3000

45° Flange one piece
3000 PSI

Embout à brides 45°
3000 PSI

45° Flanschanschluss 3000 PSI


Brida 45° 3000 PSI

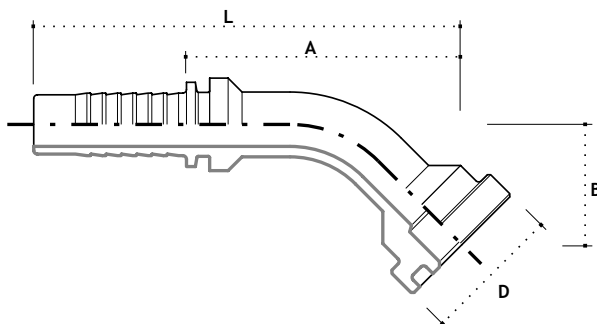

| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| F45L0808I | 12 | 1/2" | 08 | 1/2" | - | 30.2 | 23 | 63 | 96 |
| F45L0812I | 12 | 1/2" | 08 | 3/4" | - | 38.1 | 28 | 68 | 101 |
| F45L1008I | 16 | 5/8" | 10 | 1/2" | - | 30.2 | 26 | 59 | 95 |
| F45L1012I | 16 | 5/8" | 10 | 3/4" | - | 38.1 | 30 | 63 | 99 |
| F45L1208I | 20 | 3/4" | 12 | 1/2" | - | 30.2 | 28 | 63 | 104 |
| F45L1212I | 20 | 3/4" | 12 | 3/4" | - | 38.1 | 32 | 67 | 108 |
| F45L1216I | 25 | 3/4" | 12 | 1" | - | 44.5 | 35 | 70 | 111 |
| F45L1612I | 25 | 1" | 16 | 3/4" | - | 38.1 | 35 | 83 | 138 |
| F45L1616I | 25 | 1" | 16 | 1" | - | 44.5 | 32 | 86 | 141 |
| F45L1620I | 25 | 1" | 16 | 1.1/4" | - | 50.8 | 36 | 90 | 145 |
| F45L2016I | 32 | 1.1/4" | 16 | 1" | - | 44.5 | 36 | 96 | 157 |
| F45L2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 50.8 | 43 | 100 | 161 |
| F45L2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 60.3 | 44 | 101 | 162 |
| F45L2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 60.3 | 41 | 112 | 183 |
| F45L2432I | 40 | 1.1/2" | 24 | 2" | - | 71.4 | 52 | 123 | 194 |
| F45L3232I | 50 | 2" | 32 | 2" | - | 71.4 | 59 | 148 | 228 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FLANGIA DIRITTA SAE 6000

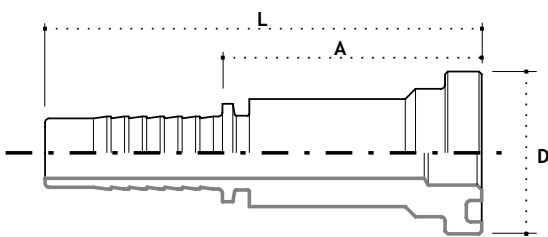
| | |
|--|---|
| <p>Straight flange 6000 PSI</p> <p>Embout à bride 6000 PSI droite</p> <p>Flanschanschluss 6000 PSI</p> <p>Brida recta 6000 PSI</p> |  <p>The drawing shows a side view of a straight flange with a threaded section on the left and a flange on the right. Dimension L is the total length, A is the length of the flange face, and D is the outer diameter of the flange.</p> |
|--|---|

| Codice Code | Tubo - Hose | | | Flangia - Flange | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|------|----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | A | L | |
| FDP0808I | 12 | 1/2" | 08 | 1/2" | - | - | 31.7 | 50 | 83 |
| FDP0812I | 12 | 1/2" | 08 | 3/4" | - | - | 41.3 | 55 | 87 |
| FDP1008I | 16 | 5/8" | 10 | 1/2" | - | - | 31.7 | 50 | 86 |
| FDP1012I | 16 | 5/8" | 10 | 3/4" | - | - | 41.3 | 51 | 87 |
| FDP1208I | 20 | 3/4" | 12 | 1/2" | - | - | 31.7 | 53 | 94 |
| FDP1212I | 20 | 3/4" | 12 | 3/4" | - | - | 41.3 | 53 | 94 |
| FDP1216I | 20 | 3/4" | 12 | 1" | - | - | 47.6 | 64 | 105 |
| FDP1612I | 25 | 1" | 16 | 3/4" | - | - | 41.3 | 64 | 105 |
| FDP1616I | 25 | 1" | 16 | 1" | - | - | 47.6 | 66 | 121 |
| FDP1620I | 25 | 1" | 16 | 1.1/4" | - | - | 54 | 71 | 126 |
| FDP2016I | 32 | 1.1/4" | 20 | 1" | - | - | 47.6 | 66 | 126 |
| FDP2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | - | 54 | 67 | 127 |
| FDP2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | - | 63.5 | 78 | 139 |
| FDP2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | - | 63.5 | 78 | 149 |
| FDP2432I | 40 | 1.1/2" | 24 | 2" | - | - | 79.4 | 73 | 143 |
| FDP3232I | 50 | 2" | 32 | 2" | - | - | 79.4 | 73 | 153 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FLANGIA 90° INTERA SAE 6000

90° Flange one piece 6000 PSI
 Embout à bride 90° 6000 PSI
 90° Flanschanschluss 6000 PSI
 Brida 90° 6000 PSI

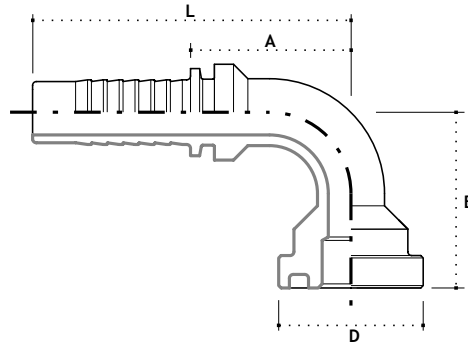


| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| F90P0808I | 12 | 1/2" | 08 | 1/2" | - | 31.7 | 44 | 39 | 72 |
| F90P0812I | 12 | 1/2" | 08 | 3/4" | - | 41.3 | 51 | 39 | 72 |
| F90P1008I | 16 | 5/8" | 10 | 1/2" | - | 31.7 | 50 | 49 | 85 |
| F90P1012I | 16 | 5/8" | 10 | 3/4" | - | 41.3 | 59 | 49 | 85 |
| F90P1208I | 20 | 3/4" | 12 | 1/2" | - | 31.7 | 53 | 57 | 98 |
| F90P1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 62 | 57 | 98 |
| F90P1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 67 | 57 | 98 |
| F90P1612I | 25 | 1" | 16 | 3/4" | - | 41.3 | 64 | 77 | 132 |
| F90P1616I | 25 | 1" | 16 | 1" | - | 47.6 | 69 | 77 | 132 |
| F90P1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 76 | 77 | 132 |
| F90P2016I | 32 | 1.1/4" | 20 | 1" | - | 47.6 | 87 | 89 | 150 |
| F90P2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 93 | 89 | 150 |
| F90P2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 97 | 89 | 150 |
| F90P2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 111 | 101 | 172 |
| F90P2432I | 40 | 1.1/2" | 24 | 2" | - | 79.4 | 126 | 101 | 172 |
| F90P3232I | 50 | 2" | 32 | 2" | - | 79.4 | 128 | 144 | 224 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


FLANGIA 45° INTERA SAE 6000

45° Flange one piece 6000 PSI
 Embout à bride 45° 6000 PSI
 45° Flanschschluss 6000 PSI
 Brida 45° 6000 PSI

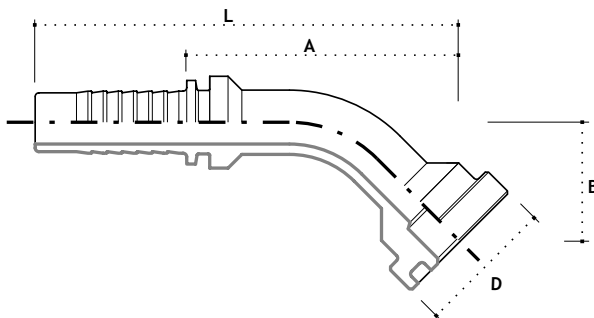

| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| F45P0808I | 12 | 1/2" | 08 | 1/2" | - | 31.7 | 23 | 64 | 97 |
| F45P0812I | 12 | 1/2" | 08 | 3/4" | - | 41.3 | 28 | 69 | 102 |
| F45P1008I | 16 | 5/8" | 10 | 1/2" | - | 31.7 | 26 | 60 | 96 |
| F45P1012I | 16 | 5/8" | 10 | 3/4" | - | 41.3 | 30 | 66 | 102 |
| F45P1208I | 20 | 3/4" | 12 | 1/2" | - | 31.7 | 28 | 64 | 105 |
| F45P1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 32 | 70 | 111 |
| F45P1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 35 | 74 | 115 |
| F45P1612I | 25 | 1" | 16 | 3/4" | - | 41.3 | 35 | 86 | 141 |
| F45P1616I | 25 | 1" | 16 | 1" | - | 47.6 | 32 | 89 | 144 |
| F45P1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 36 | 94 | 149 |
| F45P2016I | 32 | 1.1/4" | 20 | 1" | - | 47.6 | 36 | 100 | 161 |
| F45P2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 43 | 104 | 165 |
| F45P2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 44 | 107 | 168 |
| F45P2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 41 | 118 | 189 |
| F45P2432I | 40 | 1.1/2" | 24 | 2" | - | 79.4 | 52 | 119 | 190 |
| F45P3232I | 50 | 2" | 32 | 2" | - | 79.4 | 59 | 153 | 233 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

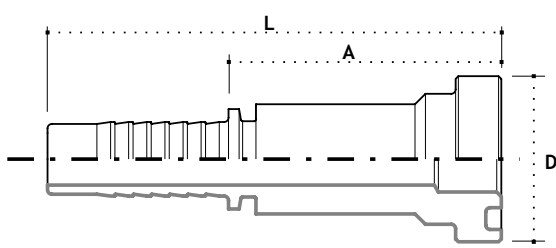
| FLANGIA DIRITTA SUPERCAT | | |
|--|--|--|
| <p>Straight flange SUPERCAT</p> <p>Embout à bride SUPERCAT droite</p> <p>Flanschanschluss SUPERCAT</p> <p>Brida recta SUPERCAT</p> |  <p>The diagram shows a side view of a straight flange with a threaded section on the left. Dimension L is the total length, A is the length of the cylindrical body, and D is the outer diameter of the flange.</p> | |

| Codice Code | Tubo - Hose | | | Flangia - Flange | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|------|----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | A | L | |
| FDS1212I | 20 | 3/4" | 12 | 3/4" | - | - | 41.3 | 58 | 99 |
| FDS1216I | 20 | 3/4" | 12 | 1" | - | - | 47.6 | 70 | 111 |
| FDS1616I | 25 | 1" | 16 | 1" | - | - | 47.6 | 72 | 127 |
| FDS1620I | 25 | 1" | 16 | 1.1/4" | - | - | 54 | 75 | 130 |
| FDS2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | - | 54 | 71 | 131 |
| FDS2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | - | 63.5 | 80 | 141 |
| FDS2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | - | 63.5 | 80 | 151 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FLANGIA 90° SUPERCAT

90° Swept elbow SUPERCAT
 Embout à bride 90° SUPERCAT
 90° Flanschanschluss SUPERCAT
 Brida 90° SUPERCAT

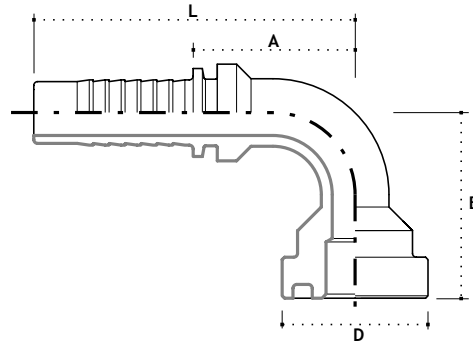


| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| F90S1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 67 | 57 | 98 |
| F90S1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 73 | 57 | 98 |
| F90S1616I | 25 | 1" | 16 | 1" | - | 47.6 | 75 | 77 | 132 |
| F90S1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 80 | 77 | 132 |
| F90S2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 97 | 89 | 150 |
| F90S2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 99 | 89 | 150 |
| F90S2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 113 | 101 | 172 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

FLANGIA 45° SUPERCAT

45° Swept elbow SUPERCAT
 Embout à bride 45° SUPERCAT
 45° Flanschanschluss SUPERCAT
 Brida 45° SUPERCAT

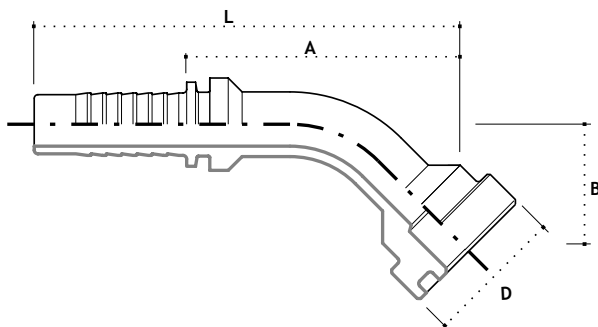


| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-----|-----|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| F45S1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 39 | 74 | 115 |
| F45S1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 43 | 78 | 119 |
| F45S1616I | 25 | 1" | 16 | 1" | - | 47.6 | 40 | 94 | 149 |
| F45S1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 43 | 97 | 152 |
| F45S2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 50 | 107 | 168 |
| F45S2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 51 | 108 | 169 |
| F45S2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 49 | 120 | 191 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD

COPPIA DI SEMI FLANGE SAE 3000

Split flange clamps couple
SAE 3000
Couple semi flange SAE 3000
Halbflansch SAE 3000
Semibrida platina 3000 PSI

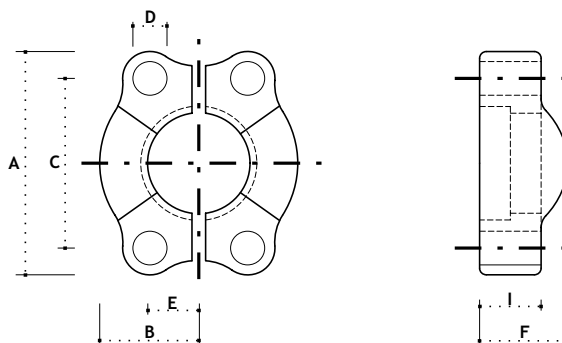

| Codice Code | Tubo - Hose | | | Flangia Flange | Dimension mm | | | | | | |
|----------------|-------------|-------------------|---------------|-------------------|--------------|------|------|----|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | A | B | C | D | E | F | I |
| SFL08 | 12 | 1/2" | 08 | 1/2" | 56.3 | 23.8 | 40.5 | 9 | 9.2 | 15.9 | 22.2 |
| SFL12 | 20 | 3/4" | 12 | 3/4" | 71.4 | 30.2 | 50.8 | 11 | 11.9 | 19 | 28.6 |
| SFL16 | 25 | 1" | 16 | 1" | 80.9 | 34.9 | 57.1 | 13 | 13.9 | 22.2 | 36.5 |
| SFL20 | 32 | 1.1/4" | 20 | 1.1/4" | 95.2 | 38.9 | 66.7 | 15 | 15.8 | 23.8 | 39.7 |
| SFL24 | 40 | 1.1/2" | 24 | 1.1/2" | 112.7 | 47.6 | 79.4 | 17 | 18.2 | 27 | 46 |
| SFL32 | 50 | 2" | 32 | 2" | 113.3 | 57.1 | 96.8 | 21 | 22.2 | 36.5 | 55.6 |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE STANDARD


COPPIA DI SEMI FLANGE SAE 6000

Split flange clamps couple
SAE 6000

Couple semi flange SAE 6000

Halbflansch SAE 6000

Semibrida platina 6000 PSI

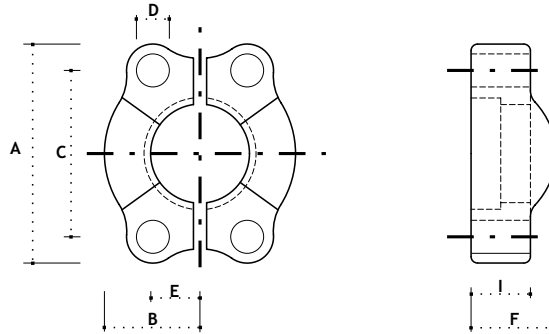

| Codice Code | Tubo - Hose | | | Flangia Flange | Dimension mm | | | | | | |
|----------------|-------------|-------------------|---------------|-------------------|--------------|------|------|----|------|------|------|
| | DN | Pollici Inches | Diam. Size | F | A | B | C | D | E | F | I |
| SFP08 | 12 | 1/2" | 08 | 1/2" | 56.3 | 23.8 | 40.5 | 9 | 9.2 | 15.9 | 22.2 |
| SFP12 | 20 | 3/4" | 12 | 3/4" | 71.4 | 30.2 | 50.8 | 11 | 11.9 | 19 | 28.6 |
| SFP16 | 25 | 1" | 16 | 1" | 80.9 | 34.9 | 57.1 | 13 | 13.9 | 22.2 | 36.5 |
| SFP20 | 32 | 1.1/4" | 20 | 1.1/4" | 95.2 | 38.9 | 66.7 | 15 | 15.8 | 23.8 | 39.7 |
| SFP24 | 40 | 1.1/2" | 24 | 1.1/2" | 112.7 | 47.6 | 79.4 | 17 | 18.2 | 27 | 46 |
| SFP32 | 50 | 2" | 32 | 2" | 113.3 | 57.1 | 96.8 | 21 | 22.2 | 36.5 | 55.6 |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


BOCCOLA 4SH

Ferrule 4SH
Jupe 4SH
Presshülse 4SH
Casquillo 4SH

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|------|------|--|
| | DN | Pollici Inches | Diam. Size | F | - | - | D | L | |
| KB4SH12 | 20 | 3/4" | 12 | - | - | - | 37 | 60 | |
| KB4SH16 | 25 | 1" | 16 | - | - | - | 46 | 74.5 | |
| KB4SH20 | 32 | 1.1/4" | 20 | - | - | - | 56 | 87.8 | |
| KB4SH24 | 40 | 1.1/2" | 24 | - | - | - | 62 | 94.4 | |
| KB4SH32 | 50 | 2" | 32 | - | - | - | 79.5 | 99 | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | - | - | - | - | |

Raccordi a pressione - SERIE INTERLOCK

BOCCOLA H13

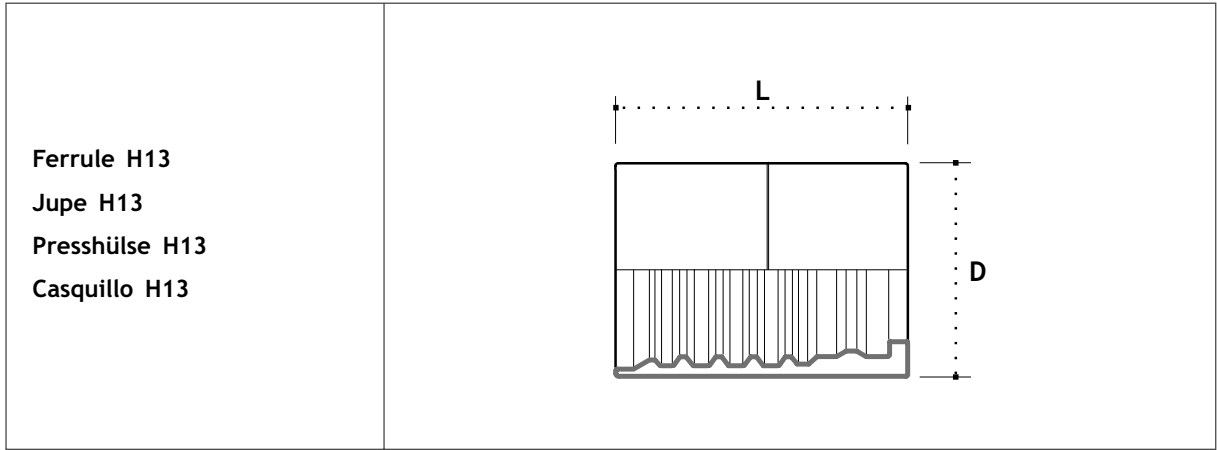

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|---|------|------|
| | DN | Pollici Inches | Diam. Size | F | | - | - | D | L |
| KBH1312 | 20 | 3/4" | 12 | - | - | - | - | - | - |
| KBH1320 | 32 | 1.1/4" | 20 | - | - | - | - | 60 | 87.8 |
| KBH1324 | 40 | 1.1/2" | 24 | - | - | - | - | 67 | 94.4 |
| KBH1332 | 50 | 2" | 32 | - | - | - | - | 84.5 | 99 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

MASCHIO GAS SV 60°

BSP male parallel 60°

Embout mâle BSP 60°

AGR 60° innenkonus
(BSP gewinde)

Macho gas cilindrico
asiento 60°

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| KMG1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 32 | 34.7 | 96.5 |
| KMG1616 | 25 | 1" | 16 | 1" - 11 | - | - | 38 | 37.4 | 109 |
| KMG1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | - | 50 | 42.6 | 114.7 |
| KMG2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 50 | 44.2 | 132.5 |
| KMG2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | - | 55 | 44.5 | 138 |
| KMG3232 | 50 | 2" | 32 | 2" - 11 | - | - | 70 | 54 | 152 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

MASCHIO GAS CONICO

BSP taper male

Mâle BSP conique 60°

AGR konisch (BSP)

Macho gas conico

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| KMGK1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 27 | 34.7 | 96.5 |
| KMGK1616 | 25 | 1" | 16 | 1" - 11 | - | - | 36 | 43.5 | 115.5 |
| KMGK2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 46 | 44.2 | 132.5 |
| KMGK2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | - | 50 | 46 | 139.5 |
| KMGK3232 | 50 | 2" | 32 | 2" - 11 | - | - | 65 | 57 | 155 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


FEMMINA GAS DADO SPINATO

BSP female thrust wired nut

Embout femelle droite écrou à jonc

DKOR BSP konus mit O-Ring (BSP gewinde)

Hembra rosca gastuerca sujetada con perno

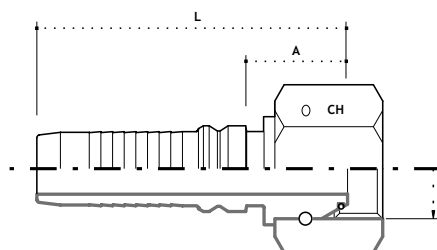

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| KFDG1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 32 | 22.7 | 84.5 |
| KFDG1616 | 25 | 1" | 16 | 1" - 11 | - | - | 38 | 24.7 | 96.5 |
| KFDG1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | - | 50 | 27.5 | 99.5 |
| KFDG2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | - | 50 | 28.2 | 116.5 |
| KFDG2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | - | 55 | 30.5 | 124 |
| KFDG3232 | 50 | 2" | 32 | 2" - 11 | - | - | 70 | 34 | 132 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


CURVA 90° GAS DADO SPINATO

90° BSP female thrust
wired nut

Embout femelle 90°BSP
écrou à jonc

DKOR 90° bogen mit O-Ring
(BSP gewinde)

Hembra 90° rosca tuerca
sujetada con perno

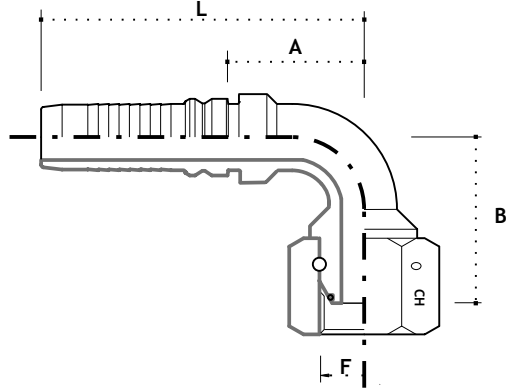

| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| KF90G1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | 32 | 59 | 54 | 113 |
| KF90G1616 | 25 | 1" | 16 | 1" - 11 | - | 38 | 72 | 70.5 | 142.5 |
| KF90G1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | 50 | 80 | 70.5 | 142.5 |
| KF90G2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | 50 | 93 | 87.7 | 176 |
| KF90G2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | 55 | 114 | 99.5 | 193 |
| KF90G3232 | 50 | 2" | 32 | 2" - 11 | - | 70 | 136 | 135 | 233 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


CURVA 45° GAS DADO SPINATO

45° BSP female thrust
wired nut

Embout femelle 45°BSP
écrou à jonc

DKOR 45° bogen mit O-Ring
(BSP gewinde)

Hembra 45° rosca tuerca
sujetada con perno

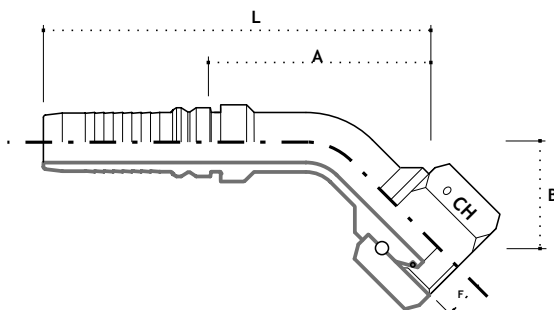


| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| KF45G1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | 32 | 29 | 60.7 | 122.5 |
| KF45G1616 | 25 | 1" | 16 | 1" - 11 | - | 38 | 41 | 87.5 | 159.5 |
| KF45G1620 | 25 | 1" | 16 | 1.1/4" - 11 | - | 50 | 44 | 90.5 | 162.5 |
| KF45G2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11 | - | 50 | 44 | 100.5 | 189 |
| KF45G2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11 | - | 55 | 45 | 116.5 | 210 |
| KF45G3232 | 50 | 2" | 32 | 2" - 11 | - | 70 | 68 | 156 | 254 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

MASCHIO NPTF SV 60°

NPTF male 60°
 Mâle NPTF 60°
 AGN 60° innenkonus (NPTF)
 Macho NPTF asiento 60°

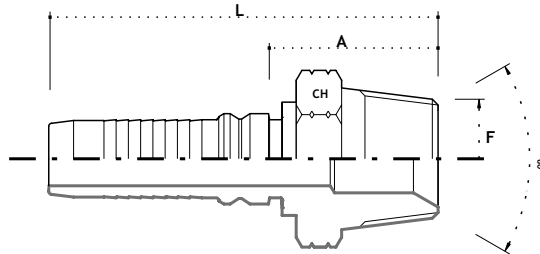

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| KMNPTF1212 | 20 | 3/4" | 12 | 3/4" - 14 | - | - | 27 | 34.5 | 96.5 |
| KMNPTF1216 | 20 | 3/4" | 12 | 1" - 11.5 | - | - | 36 | 42.5 | 104.5 |
| KMNPTF1616 | 25 | 1" | 16 | 1" - 11.5 | - | - | 36 | 43 | 115 |
| KMNPTF1620 | 25 | 1" | 16 | 1.1/4" - 11.5 | - | - | 46 | 43 | 115 |
| KMNPTF2020 | 32 | 1.1/4" | 20 | 1.1/4" - 11.5 | - | - | 46 | 44 | 137.5 |
| KMNPTF2024 | 32 | 1.1/4" | 20 | 1.1/2" - 11.5 | - | - | 50 | 44 | 137.5 |
| KMNPTF2424 | 40 | 1.1/2" | 24 | 1.1/2" - 11.5 | - | - | 50 | 45.5 | 139 |
| KMNPTF3232 | 50 | 2" | 32 | 2" - 11.5 | - | - | 65 | 57 | 155 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


MASCHIO JIC 74°

JIC male sv 74°

Mâle JIC 74°

AGJ 74° JIC aussenkonus
(UNF gewinde)

Macho rosca UNF asiento
JIC-74°

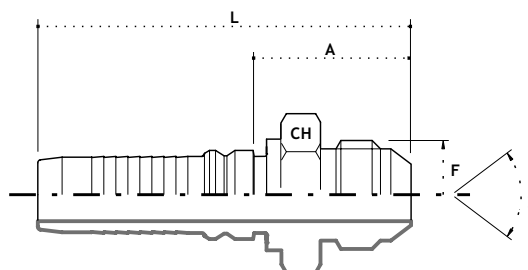

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| KMJ1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | - | 27 | 38 | 100 |
| KMJ1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | - | 32 | 39 | 101 |
| KMJ1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | - | 34 | 39 | 101 |
| KMJ1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | - | 34 | 40 | 112 |
| KMJ1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | - | 42 | 42.5 | 114.5 |
| KMJ2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | - | 42 | 44 | 132.5 |
| KMJ2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | - | 50 | 51 | 139.5 |
| KMJ2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | - | 50 | 51 | 144.5 |
| KMJ3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


FEMMINA JIC 74° DADO SPINATO

JIC female 74° thrust wired nut

Embout femelle JIC 74° écrou à jonc

DKJ 74° (UNF) verstiftete mutter

Hembra rosca UNF asiento JIC-74° tuerca sujetada con perno

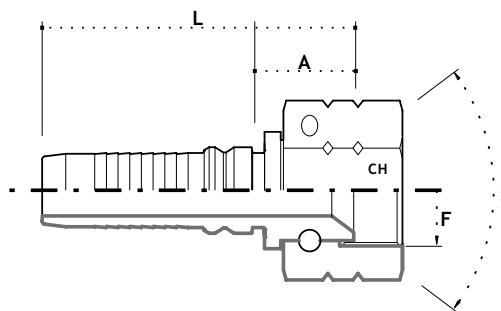

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| KFDJ1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | - | 32 | 20.5 | 82.5 |
| KFDJ1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | - | 36 | 20.5 | 82.5 |
| KFDJ1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | - | 41 | 20.5 | 82.5 |
| KFDJ1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | - | 41 | 22 | 94 |
| KFDJ1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | - | 50 | 26 | 98 |
| KFDJ2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | - | 50 | 27.5 | 116 |
| KFDJ2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | - | 55 | 29.5 | 118 |
| KFDJ2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | - | 55 | 29.5 | 123 |
| KFDJ3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | 70 | 33 | 131 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

CURVA 90° JIC SV 74° DADO SPINATO

| | |
|---|--|
| <p>90° JIC female swept elbow 74° cone seat wired nut</p> <p>Embout femelle 90° JIC 74° filet UNF écrou à jonc</p> <p>DKJ 90° bogen 74° dicht kopf (UNF) verstiftete mutter</p> <p>Hembra 90° rosca UNF asiento JIC-74° tuerca sujetada con perno</p> | |
|---|--|

| Codice Code | Tubo - Hose | | | Filetto - Thread F | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|-----------------------|---|--------------|-------|------|-------|
| | DN | Pollici Inches | Diam. Size | | | CH | B | A | L |
| KF90J1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | 32 | 58 | 51 | 113 |
| KF90J1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 61 | 51 | 113 |
| KF90J1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | 41 | 62.5 | 51 | 113 |
| KF90J1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | 41 | 69.5 | 70.5 | 142.5 |
| KF90J1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | 50 | 78.5 | 70.5 | 142.5 |
| KF90J2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | 50 | 91.5 | 87.5 | 176 |
| KF90J2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | 55 | 99 | 87.5 | 176 |
| KF90J2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | 55 | 112.5 | 99.5 | 193 |
| KF90J3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


CURVA 45° JIC SV 74° DADO SPINATO

45° JIC female swept elbow
74° cone seat wired nut

Embout femelle 45° JIC
74° filet UNF écrou à jonc

DKJ 45° bogen 74° dicht
kopf (UNF) verstiftete mutter

Hembra 45° rosca UNF asiento
JIC-74° tuerca sujetada
con perno

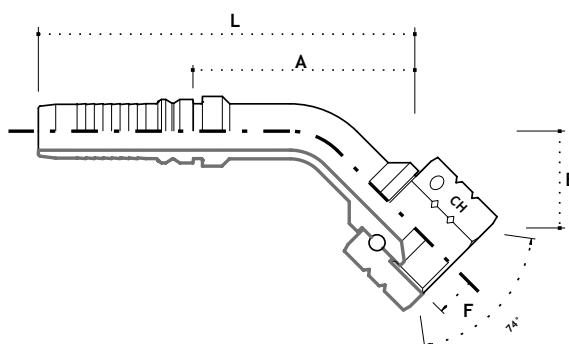


| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| KF45J1212 | 20 | 3/4" | 12 | 1.1/16" - 12 | - | 32 | 29 | 59.5 | 121.5 |
| KF45J1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 29 | 60.5 | 122.5 |
| KF45J1216 | 20 | 3/4" | 12 | 1.5/16" - 12 | - | 41 | 29 | 60.5 | 122.5 |
| KF45J1616 | 25 | 1" | 16 | 1.5/16" - 12 | - | 41 | 39.5 | 86 | 158 |
| KF45J1620 | 25 | 1" | 16 | 1.5/8" - 12 | - | 50 | 38.5 | 87 | 159 |
| KF45J2020 | 32 | 1.1/4" | 20 | 1.5/8" - 12 | - | 50 | 44 | 99.5 | 188 |
| KF45J2024 | 32 | 1.1/4" | 20 | 1.7/8" - 12 | - | 55 | 45 | 101.5 | 190 |
| KF45J2424 | 40 | 1.1/2" | 24 | 1.7/8" - 12 | - | 55 | 45 | 116.5 | 210 |
| KF45J3232 | 50 | 2" | 32 | 2.1/2" - 12 | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

MASCHIO METRICO SV 24° SERIE PESANTE DKOS

Metric male 24° cone h.t.
 Mâle métrique 24° série S
 Ces DKO-S metrish
 Macho rosca metrica asiento
 24° serie S

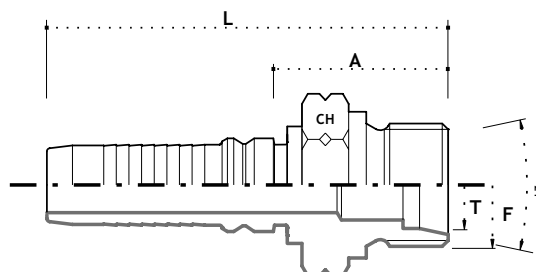


| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | - | CH | A | L |
| KME1230S20 | 20 | 3/4" | 12 | M30 x 2 | 20 | - | 32 | 31.5 | 93.5 |
| KME1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | - | 38 | 33.5 | 95.5 |
| KME1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | - | 38 | 36 | 108 |
| KME1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | - | 46 | 39.5 | 111.5 |
| KME2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | - | 46 | 40.5 | 129 |
| KME2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | - | 55 | 44.5 | 133 |
| KME2452S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | - | 55 | 44.5 | 138 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FEMMINA METRICA O-RING SERIE PESANTE DKOS

O-Ring metric female h.t.
 Embout femelle droite O-Ring
 24° série S
 DKO-S innengew mit O-Ring
 Hembra rosca metrica
 O-Ring serie S

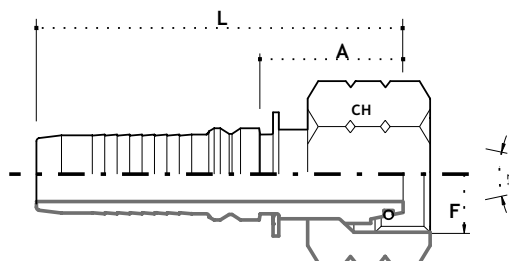

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | - | CH | A | L |
| KFE1230S20 | 20 | 3/4" | 12 | M30 x 2 | 20 | - | 36 | 35 | 97 |
| KFE1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | - | 46 | 36 | 98 |
| KFE1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | - | 46 | 37 | 109 |
| KFE1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | - | 50 | 38 | 110 |
| KFE2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | - | 50 | 40 | 128.5 |
| KFE2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | - | 60 | 45.5 | 134 |
| KFE2420S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | - | 60 | 45.5 | 139 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


CURVA 90° METRICA O-RING SERIE PESANTE DKOS

90° O-Ring metric female h.t.

Embout femelle 90° O-Ring
série S

DKO-S 90° bogen, reines

Hembra 90° rosca metrica
O-Ring serie S

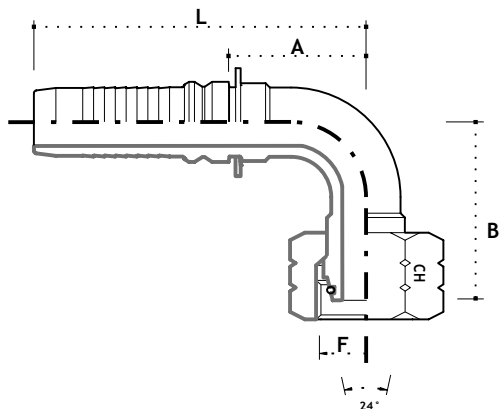

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| KF90E1230S20 | 20 | 3/4" | 12 | M30 x 2 | 20 | 36 | 59 | 54 | 116 |
| KF90E1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | 46 | 59 | 54 | 116 |
| KF90E1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | 46 | 75 | 70.5 | 142.5 |
| KF90E1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | 50 | 75 | 70.5 | 142.5 |
| KF90E2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | 50 | 86 | 90.5 | 179 |
| KF90E2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | 60 | 86 | 90.5 | 179 |
| KF90E2452S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | 60 | 94 | 97.5 | 191 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


CURVA 45° METRICA O-RING SERIE PESANTE DKOS

45° O-Ring metric female h.t.

Embout femelle 45° O-Ring
série S

DKOS 45° bogen reines

Hembra 45° rosca metrica
O-Ring serie S

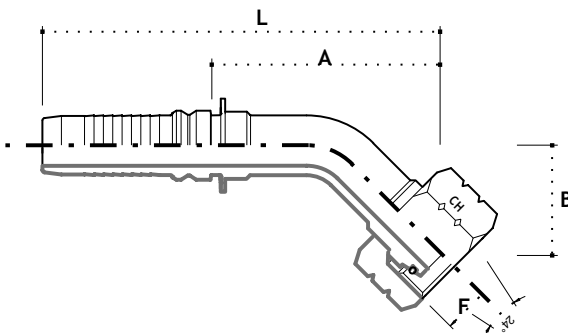

| Codice Code | Tubo - Hose | | | Filetto - Thread | Tubo mm | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|------------|--------------|----|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| KF45E1230S20 | 20 | 3/4" | 12 | M30 x 2 | 20 | 36 | 27 | 61.5 | 123.5 |
| KF45E1236S25 | 20 | 3/4" | 12 | M36 x 2 | 25 | 46 | 28 | 67.5 | 129.5 |
| KF45E1636S25 | 25 | 1" | 16 | M36 x 2 | 25 | 46 | 38 | 86 | 158 |
| KF45E1642S30 | 25 | 1" | 16 | M42 x 2 | 30 | 50 | 38 | 86.5 | 158.5 |
| KF45E2042S30 | 32 | 1.1/4" | 20 | M42 x 2 | 30 | 50 | 35 | 103 | 191.5 |
| KF45E2052S38 | 32 | 1.1/4" | 20 | M52 x 2 | 38 | 60 | 35 | 103 | 191.5 |
| KF45E2452S38 | 40 | 1.1/2" | 24 | M52 x 2 | 38 | 60 | 45 | 117.5 | 211 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FEMMINA ORFS

| | |
|--|--|
| <p>ORFS female Femelle ORFS ORFS unf gewinde Hembra ORFS</p> | |
|--|--|

| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | - | CH | A | L | |
| KFORFS1014 | 16 | 5/8" | 10 | 1.3/16" - 12 | - | - | - | - | - |
| KFORFS1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | - | 36 | 30.5 | 92.5 |
| KFORFS1215 | 20 | 1" | 12 | 1.7/16" - 12 | - | - | 41 | 31.5 | 93.5 |
| KFORFS1615 | 25 | 1" | 16 | 1.7/16" - 12 | - | - | 41 | 32.5 | 104.5 |
| KFORFS2021 | 32 | 1.1/4" | 20 | 1.11/16" - 12 | - | - | 50 | 34 | 122.5 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


CURVA 90° ORFS

90° ORFS female

ORFS femelle 90°

DK 90° bogen ORFS - UNF,
stirndichtend

Hembra codo 90°

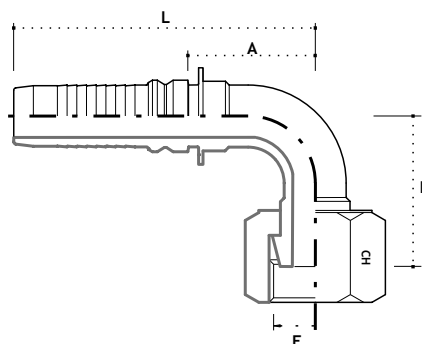


| Codice Code | Tubo - Hose | | | Filetto - Thread | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | CH | B | A | L |
| KF90ORFS1014 | 16 | 5/8" | 10 | 1.3/16" - 12 | - | - | - | - | - |
| KF90ORFS1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 49 | 53.5 | 115.5 |
| KF90ORFS1215 | 20 | 1" | 12 | 1.7/16" - 12 | - | 41 | 54 | 54 | 116 |
| KF90ORFS1615 | 25 | 1" | 16 | 1.7/16" - 12 | - | 41 | 59.5 | 71.5 | 143.5 |
| KF90ORFS2021 | 32 | 1.1/4" | 20 | 1.11/16" - 12 | - | 50 | 75.5 | 88.5 | 177 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

CURVA 45° ORFS

45° ORFS female
 ORFS femelle 45°
 DK 45° bogen ORFS - UNF,
 stirndichtend
 Hembra codo 45°

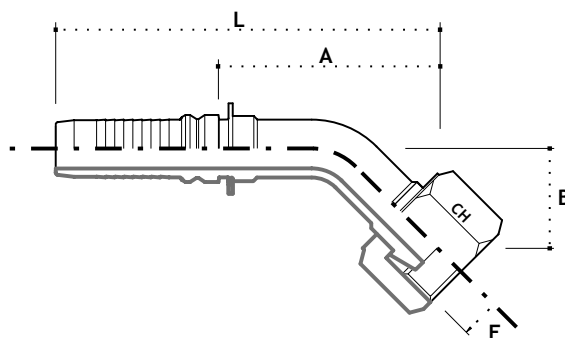


| Codice Code | Tubo - Hose | | | Filetto - Thread | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|----|----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | CH | B | A | L | |
| KF45ORFS1014 | 16 | 5/8" | 10 | 1.3/16" - 12 | - | - | - | - | |
| KF45ORFS1214 | 20 | 3/4" | 12 | 1.3/16" - 12 | - | 36 | 23 | 55.5 | 117.5 |
| KF45ORFS1215 | 20 | 1" | 12 | 1.7/16" - 12 | - | 41 | 27 | 60 | 122 |
| KF45ORFS1615 | 25 | 1" | 16 | 1.7/16" - 12 | - | 41 | 26 | 78.5 | 150.5 |
| KF45ORFS2021 | 32 | 1.1/4" | 20 | 1.11/16" - 12 | - | 50 | 34 | 91.5 | 180 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FLANGIA DIRITTA SAE 3000

Straight flange 3000 PSI
 Embout à bride 3000 PSI droite
 Flanschanschluss 3000 PSI
 Brida recta 3000 PSI

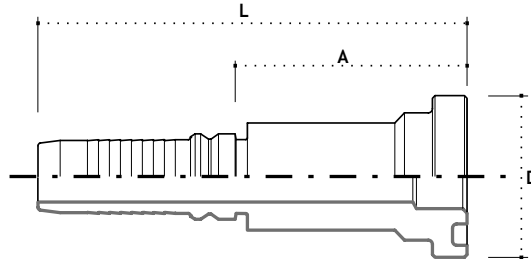

| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | D | A | L | |
| KFDL1212I | 20 | 3/4" | 12 | 3/4" | - | - | 38.1 | 56.7 | 118.5 |
| KFDL1216I | 20 | 3/4" | 12 | 1" | - | - | 44.5 | 48.7 | 119.5 |
| KFDL1612I | 25 | 1" | 16 | 3/4" | - | - | 38.1 | 47.6 | 119.7 |
| KFDL1616I | 25 | 1" | 16 | 1" | - | - | 44.5 | 47.6 | 119.7 |
| KFDL1620I | 25 | 1" | 16 | 1.1/4" | - | - | 50.8 | 64.6 | 136.7 |
| KFDL2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | - | 50.8 | 68.7 | 155 |
| KFDL2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | - | 60.3 | 78.7 | 167 |
| KFDL2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | - | 60.3 | 68.5 | 162 |
| KFDL2432I | 40 | 1.1/2" | 24 | 2" | - | - | 71.4 | 70.5 | 164 |
| KFDL3232I | 50 | 2" | 32 | 2" | - | - | 71.4 | 70.5 | 171 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


FLANGIA 90° SAE 3000

90° SAE flange 3000 PSI

Embout à bride SAE 90° 3000 PSI

90° flanschanschluss 3000 PSI

Brida 90° 3000 PSI SAE

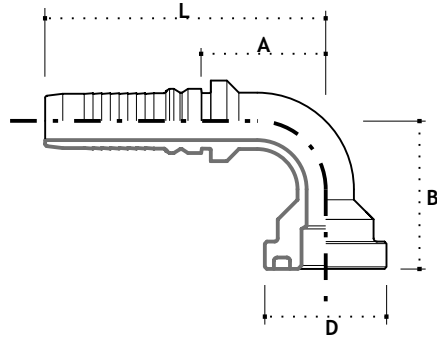


| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| KF90L1212I | 20 | 3/4" | 12 | 3/4" | - | 38.1 | 58 | 54.7 | 116.5 |
| KF90L1216I | 20 | 3/4" | 12 | 1" | - | 44.5 | 62 | 54.7 | 116.5 |
| KF90L1612I | 25 | 1" | 16 | 3/4" | - | 38.1 | 60 | 74.6 | 146.7 |
| KF90L1616I | 25 | 1" | 16 | 1" | - | 44.5 | 68 | 70.6 | 146.7 |
| KF90L1620I | 25 | 1" | 16 | 1.1/4" | - | 50.8 | 70 | 74.6 | 146.7 |
| KF90L2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 50.8 | 87 | 87.7 | 176 |
| KF90L2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 60.3 | 88 | 87.7 | 176 |
| KF90L2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 60.3 | 102 | 99.5 | 193 |
| KF90L2432I | 40 | 1.1/2" | 24 | 2" | - | 71.4 | 118 | 99.5 | 193 |
| KF90L3232I | 50 | 2" | 32 | 2" | - | 71.4 | 120 | 144 | 242 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FLANGIA 45° SAE 3000

45° SAE flange 3000 PSI
 Embout à bride 45° 3000 PSI
 45° flanschanschluss 3000 PSI
 Brida 45° 3000 PSI SAE

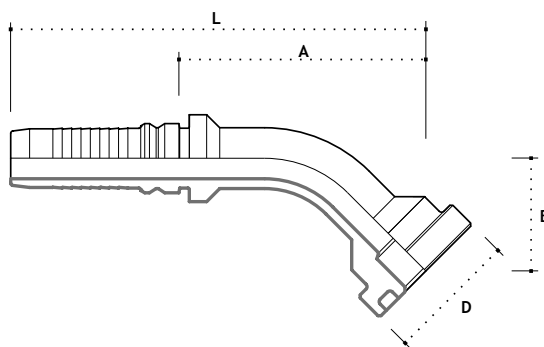


| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| KF45L1212I | 20 | 3/4" | 12 | 3/4" | - | 38.1 | 32 | 64.7 | 126.5 |
| KF45L1216I | 20 | 3/4" | 12 | 1" | - | 44.5 | 35 | 67.7 | 129.5 |
| KF45L1612I | 25 | 1" | 16 | 3/4" | - | 38.1 | 35 | 80.6 | 152.7 |
| KF45L1616I | 25 | 1" | 16 | 1" | - | 44.5 | 32 | 83.6 | 155.7 |
| KF45L1620I | 25 | 1" | 16 | 1.1/4" | - | 50.8 | 36 | 87.6 | 159.7 |
| KF45L2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 50.8 | 43 | 98.7 | 187 |
| KF45L2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 60.3 | 44 | 99.7 | 188 |
| KF45L2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 60.3 | 41 | 110.5 | 204 |
| KF45L2432I | 40 | 1.1/2" | 24 | 2" | - | 71.4 | 52 | 121.5 | 215 |
| KF45L3232I | 50 | 2" | 32 | 2" | - | 71.4 | 59 | 148 | 246 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FLANGIA DIRITTA SAE 6000

Straight flange 6000 PSI
 Embout à bride 6000 PSI droite
 Flanschanschluss 6000 PSI
 Brida recta 6000 PSI

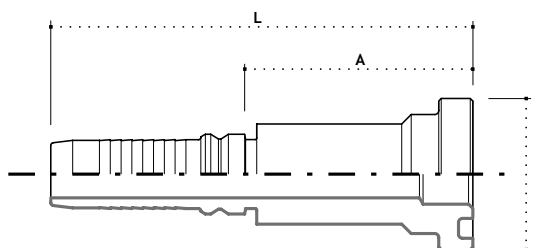

| Codice Code | Tubo - Hose | | | Flangia - Flange | Dimension mm | | | | |
|----------------|-------------|-------------------|---------------|------------------|--------------|---|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | D | A | L | |
| KFDP1212I | 20 | 3/4" | 12 | 3/4" | - | - | 41.3 | 50 | 112 |
| KFDP1216I | 20 | 3/4" | 12 | 1" | - | - | 47.6 | 61.7 | 123.5 |
| KFDP1612I | 25 | 1" | 16 | 3/4" | - | - | 41.3 | 61.6 | 133.7 |
| KFDP1616I | 25 | 1" | 16 | 1" | - | - | 47.6 | 63.6 | 135.7 |
| KFDP1620I | 25 | 1" | 16 | 1.1/4" | - | - | 54 | 68.6 | 140.7 |
| KFDP2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | - | 54 | 68.7 | 157 |
| KFDP2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | - | 63.5 | 76.7 | 165 |
| KFDP2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | - | 63.5 | 76.5 | 170 |
| KFDP3232I | 50 | 2" | 32 | 2" | - | - | 79.4 | 73 | 171 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FLANGIA 90° SAE 6000


| | |
|--|--|
| <p>90° SAE flange 6000 PSI</p> <p>Embout à bride SAE 90° 6000 PSI</p> <p>90° flanschanschluss 6000 PSI</p> <p>Brida 90° 6000 PSI SAE</p> | |
|--|--|

| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|-----|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| KF90P1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 62 | 54.7 | 116.5 |
| KF90P1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 67 | 54.7 | 116.5 |
| KF90P1612I | 25 | 1" | 16 | 3/4" | - | 41.3 | 64 | 74.6 | 146.7 |
| KF90P1616I | 25 | 1" | 16 | 1" | - | 47.6 | 69 | 74.6 | 146.7 |
| KF90P1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 76 | 74.6 | 146.7 |
| KF90P2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 93 | 87.7 | 176 |
| KF90P2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 97 | 87.7 | 176 |
| KF90P2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 111 | 99.5 | 193 |
| KF90P3232I | 50 | 2" | 32 | 2" | - | 79.4 | 128 | 144 | 242 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FLANGIA 45° SAE 6000

45° SAE flange 6000 PSI
 Embout à bride 45° 6000 PSI
 45° flanschanschluss 6000 PSI
 Brida 45° 6000 PSI SAE

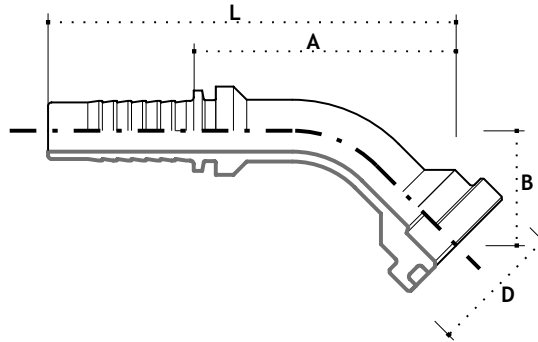

| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| KF45P1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 35 | 67.7 | 129.5 |
| KF45P1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 39 | 71.7 | 133.5 |
| KF45P1612I | 25 | 1" | 16 | 3/4" | - | 41.3 | 32 | 83.6 | 155.7 |
| KF45P1616I | 25 | 1" | 16 | 1" | - | 47.6 | 35 | 86.6 | 158.7 |
| KF45P1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 40 | 91.6 | 163.7 |
| KF45P2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 47 | 102.7 | 191 |
| KF45P2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 50 | 105.7 | 194 |
| KF45P2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 47 | 116.5 | 210 |
| KF45P3232I | 50 | 2" | 32 | 2" | - | 79.4 | 64 | 153 | 251 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK


FLANGIA DIRITTA SUPERCAT

Straight SAE flange SUPERCAT

Embout à bride SUPERCAT droite

Flanschanschluss SUPERCAT

Brida recta SUPERCAT

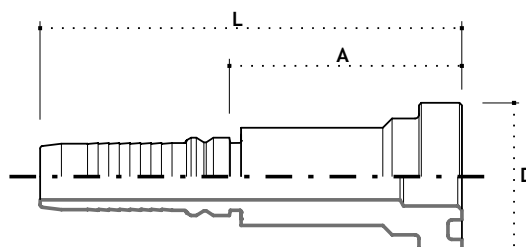


| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|-------------|-------------|----------------|------------|------------------|---|--------------|------|------|-------|
| | DN | Pollici Inches | Diam. Size | F | | B | A | L | |
| KFDS1212I | 20 | 3/4" | 12 | 3/4" | - | - | 41.3 | 55.7 | 117.5 |
| KFDS1216I | 20 | 3/4" | 12 | 1" | - | - | 47.6 | 67.7 | 129.5 |
| KFDS1616I | 25 | 1" | 16 | 1" | - | - | 47.6 | 69.6 | 141.7 |
| KFDS1620I | 25 | 1" | 16 | 1.1/4" | - | - | 54 | 72.6 | 144.7 |
| KFDS2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | - | 54 | 69.7 | 158 |
| KFDS2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | - | 63.5 | 78.7 | 167 |
| KFDS2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | - | 63.5 | 78.5 | 172 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FLANGIA 90° SUPERCAT

90° Swept elbow SUPERCAT
 Embout à bride 90° SUPERCAT
 90° flanschanschluss SUPERCAT
 Brida 90° SUPERCAT

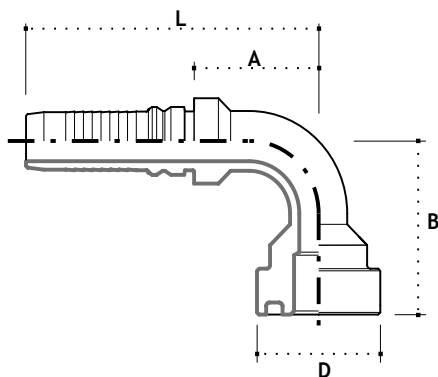


| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|-------------|-------------|----------------|------------|------------------|---|--------------|-----|------|-------|
| | DN | Pollici Inches | Diam. Size | | | F | D | B | A |
| KF90S1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 67 | 54.7 | 116.5 |
| KF90S1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 73 | 54.7 | 116.5 |
| KF90S1616I | 25 | 1" | 16 | 1" | - | 47.6 | 75 | 74.6 | 146.7 |
| KF90S1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 80 | 74.6 | 146.7 |
| KF90S2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 97 | 87.7 | 176 |
| KF90S2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 99 | 87.7 | 176 |
| KF90S2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 113 | 99.5 | 193 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |

Raccordi a pressione - SERIE INTERLOCK

FLANGIA 45° SUPERCAT

45° Swept elbow SUPERCAT
 Embout à bride 45° SUPERCAT
 45° flanschanschluss
 SUPERCAT
 Brida 45° SUPERCAT

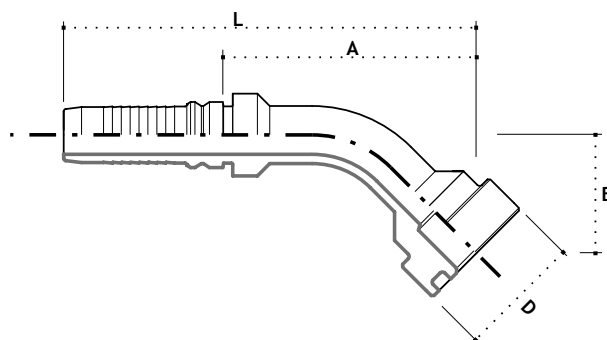

| Codice Code | Tubo - Hose | | | Flangia - Flange | | Dimension mm | | | |
|----------------|-------------|-------------------|---------------|------------------|---|--------------|----|-------|-------|
| | DN | Pollici Inches | Diam. Size | F | | D | B | A | L |
| KF45S1212I | 20 | 3/4" | 12 | 3/4" | - | 41.3 | 39 | 71.7 | 133.5 |
| KF45S1216I | 20 | 3/4" | 12 | 1" | - | 47.6 | 43 | 75.7 | 137.5 |
| KF45S1616I | 25 | 1" | 16 | 1" | - | 47.6 | 40 | 91.6 | 163.7 |
| KF45S1620I | 25 | 1" | 16 | 1.1/4" | - | 54 | 43 | 94.6 | 166.7 |
| KF45S2020I | 32 | 1.1/4" | 20 | 1.1/4" | - | 54 | 50 | 105.7 | 194 |
| KF45S2024I | 32 | 1.1/4" | 20 | 1.1/2" | - | 63.5 | 51 | 106.7 | 195 |
| KF45S2424I | 40 | 1.1/2" | 24 | 1.1/2" | - | 63.5 | 49 | 118.5 | 212 |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - | - | - |